


NOTE:

- CABLE: (A)28AWG(7/0.12TC),UL2919,AL+D+B(85% AL/MY)-FOIL,(28AWG\*1C+S)\*3COAX+28AWG\*9C,OD=8.5±0.2mm.BEIGE WITH EMOSS,PVC JACKET[Conductor: TS].  
(B)UL2464,AL-FOIL,28AWG\*4C+D,OD=4.0mm,BEIGE COLOR,PVC JACKET
- LENGTH: 1880mm.
- CONNECTORS: HDB15P\*2PCS(BLUE INSULATION)(FULL PIN G/F)(SHELL NICKEL).  
MD6M\*1PCS(GREEN INSULATION)(PING G/F)(SHELL NICKEL),  
USBAM\*1PCS(WHITE COLOR)(PIN G/F)(SHELL NICKEL).
- SCREW : INCH SCREW\*4,(BNC SCREW)(NICKEL),
- CONTACTS:

P1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	64
P2	1	2	3			5+10	7+8	7+8				12	13	14	15	64
P3				2	3	4				1						64
P4	R	C	B	C	G	C										64
				Pair		R	G	G	G	B	G					SHELL
- MOLD: ASS'Y IBM TYPE.
- Test machine test condition.
  - 100% OPEN,SHORT&INTERMITANCE TEST.
  - CONDUCTOR RESISTANCE: 3ohms MAX:
  - INSULATION RESISTANCE: 5M Min/,10ms:
- ALL MUST BE RoHS COMPLIANT.

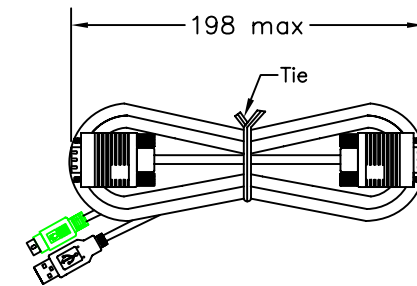

PACKING: 1PCS/PE BAG+ITEM NO LABEL.

COMPANY	DDC		ITEM NO.	ACC-2101-1.8M	NO	B	Part Name	HDB15MM-IBM 3COA+9C	SCALE	NON
REVISION	DATE	DISCRIPTION	DRAWN BY							
REV.A/0	2014.11.11		DESIGNED BY						UNIT(mm)	
			APPROVAL BY						PAGE	1/1



SPEC