



## RPSMA plug-RPSMA jack-3m

ANC-1430



H/W Version: 1

LevelOne provides a high-performance DDC 200 cable with excellent flexibility. All cables designed for low loss general-purpose indoor/outdoor applications, such as extending network connection and many more.

### Weatherability

DDC 200 cables are designed for outdoor exposure incorporate the best materials for UV resistance and have life expectancy in more than 10 years.



1. RPSMA Jack  
2. RPSMA plug

### Related Products



**ANC-1440**  
RPSMA plug-RPSMA jack-5m



**ANC-1470**  
RPSAM plug-RPSAM jack-10m

## Technical Specifications

### Electrical Properties:

#### Frequency Range

DC~6GHz

#### Impedance

50Ω

#### Insertion Loss

2.4 Ghz 1.1 dB

3.0 Ghz 1.0 dB

5.8 Ghz 1.2 dB

6.0 Ghz 1.0 dB

#### VSWR

1.3:1 Max

#### Cable

Low Loss 200 Coaxial cable

#### Connector

RP SMA MALE

#### Connector

RP SMA FEMALE

### Physical Properties

#### Operating Temp

-10°C~+60°C

#### Storage Temp

-10°C~+70°C

#### Conductor Material

Bare Copper Wire

#### Conductor Cond. Size

1.12±0.03mm

#### Insulation MIN. AVG.THICK

0.84mm

#### Insulation Material

Gas Injected Foamed Polyethylene

#### Shield Copper Material

Tinned Copper Wire

#### Shield Copper Size

0.12±0.008mm

#### Jacket Material

PVC


#### Jacket Colour

Black

#### Jacket O.D

4.95±0.10

## Dimension Diagram

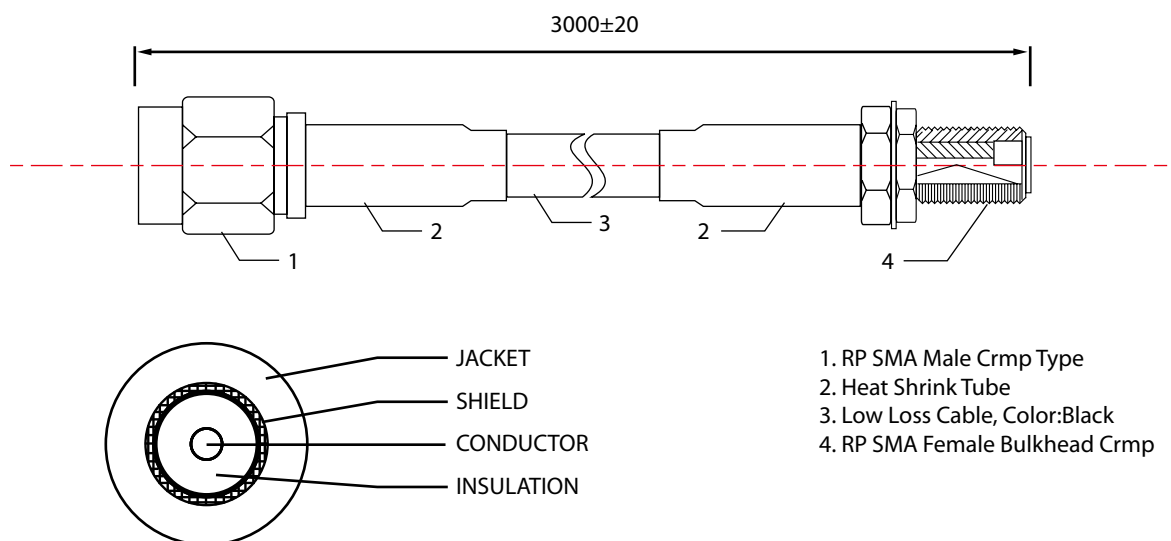

## Order Information

**ANC-1430:** RPSMA plug-RPSMA jack-3m

## Package Contents

ANC-1430