



DDC 200 Series N plug–N plug



ANC-2210

H/W Version: 1

LevelOne provides a higher performance DDC 200 cable with excellent flexibility. All cables designed for low loss general – purpose indoor/ outdoor applications.

Weatherability

DDC 200 cables designed for outdoor exposure incorporate the best materials for UV resistance and have life expectancy in more than 10 years.



1. N-plug Connector
2. N-plug Connector

Related Products



ANC-2310
200 Series RPSMA plug-N
plug-1m



ANC-4230
400 series N plug-N plug
Cable 3m

Technical Specifications

Electrical Properties:

Frequency Range

DC~3GHz

Impedance

50Ω Nominal

Insertion Loss

2 GHz 1.1 dB

2.5 GHz 1.2 dB

3 GHz 1.7 dB

VSWR

1.7 : 1 Max.

Cable

CFD-200 Coaxial Cable

Connector

N Type plug Standard

Connector

N Type plug Standard

Physical Properties:

Operating Temp

-10°C~+60°C

Storage Temp

-10°C~+70°C

Conductor AWG

18AWG

Conductor Material

Bare Copper

Conductor Cond. Size

1/1.05±0.03

Insulation MIN.AVG.THICK

0.80mm

Insulation Material

FM-PE+SKIN

Insulation O.D

3.00±0.10mm

Insulation NO.

1C

Face Outside AL-Mylar Coverage

100%

Face Outside AL-Mylar Overlap

25% Min

Braid Copper Material

Tinned Copper

Braid Copper Size

16* 7/0.12±0.008mm

Jacket MIN.AVG THICK

0.50mm

Jacket Material

Half Matter PVC UV.Resistance



Jacket Colour

UL813 Black Low Toxic

Jacket O.D

5.00±0.15 mm

Dimension Diagram

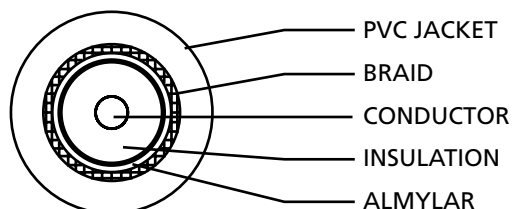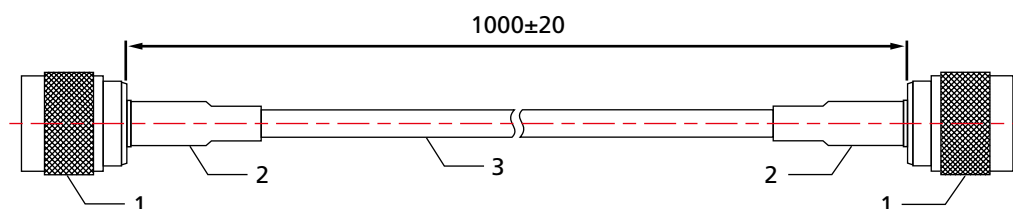

1. N-Type plug Standard
2. Heat Shrink Tube
3. CFD-200 Cable, Color:Black

Order Information ANC-2210: DDC 200 Series N plug-N plug

Package Contents ANC-2210