



PoE Upgradable Outdoor Housing (12VDC/24VAC)



BOH-1300

H/W Version: 1

Easy to mount and install

BOH-1300 is an indoor/outdoor protective housing for LevelOne IP Network Cameras. It is lightweight and easy to install. This is a cost-effective solution for professional surveillance networks. BOH-1300 also supports DC12V or AC24V power for flexible deployment.

Built-in Heater and Fan

It also features a built-in heater and fan that controls the temperature of the enclosed camera. The fan operates between 25°C and 35°C, while the heater operates between 15°C and 25°C.

Upgrade to PoE power with POM-1100!

The new Power over Ethernet module (POM-1100)

lets you power your LevelOne outdoor housing using 100% PoE power. No more hassle with crimping and running wires. Just plug and play and you have enough power to run the fan, heater, camera and LEDs from a single power source*.

Works with LevelOne's BOH-1100/1200/1300**.

*For best results, use a LevelOne high-power 40W PoE injector to ensure enough watts run to each IP cameras and accessories.

**if you want to use camera with POM-1100 into the BOH-1300, the camera's length have to smaller then 14.3cm(include lens). In this solution, it only works with FCS-1121.



POM-1100
PoE Module for
BOH-1100/1200/1300



1



2

3

4

1. Heater
2. Mounting bracket
3. Power relay board
4. Fan

Key Features

- Designed for Indoor/outdoor applications
- IP67 rated camera outdoor housing
- Lightweight for easy wall mounting
- Side opening
- Easy access for service and installation
- Withstands severe environment conditions
- Works with either DC12V or AC24V power source
- PoE upgradable with POM-1100 module

Works Well With



FCS-1121
H.264 MegaPixel PoE Network Camera



FCS-1101
PoE Network Camera

Technical Specification

Material

Aluminum extrusion

Regulation Rated

IP67

Housing Color

Beige

Input Power Voltage

DC12V/1.5A or AC24V/1.5A

Dimension

Camera housing: 313(L) x 147(W) x 115(H) mm

Inside internal useable area for camera/lens: 170(L) x 95(W) x 70(H) mm

Window Size

75mm x 75mm

Weight w/o Bracket

950g

Support Cameras

FCS-1101/1121

Weight w/ Bracket

1233g

Max. Load of Bracket

10kg

Temperature

Operating: -20°C ~50°C

Humidity

0%~95% (RH)

Heater Operating

Activates below 15°C ($\pm 5^{\circ}\text{C}$)

Deactivates over 25°C ($\pm 5^{\circ}\text{C}$)


Fan Operating

Activates over 35°C ($\pm 5^{\circ}\text{C}$)

Deactivates below 25°C ($\pm 5^{\circ}\text{C}$)

*the package donot include any power adapter.

Dimension Diagram

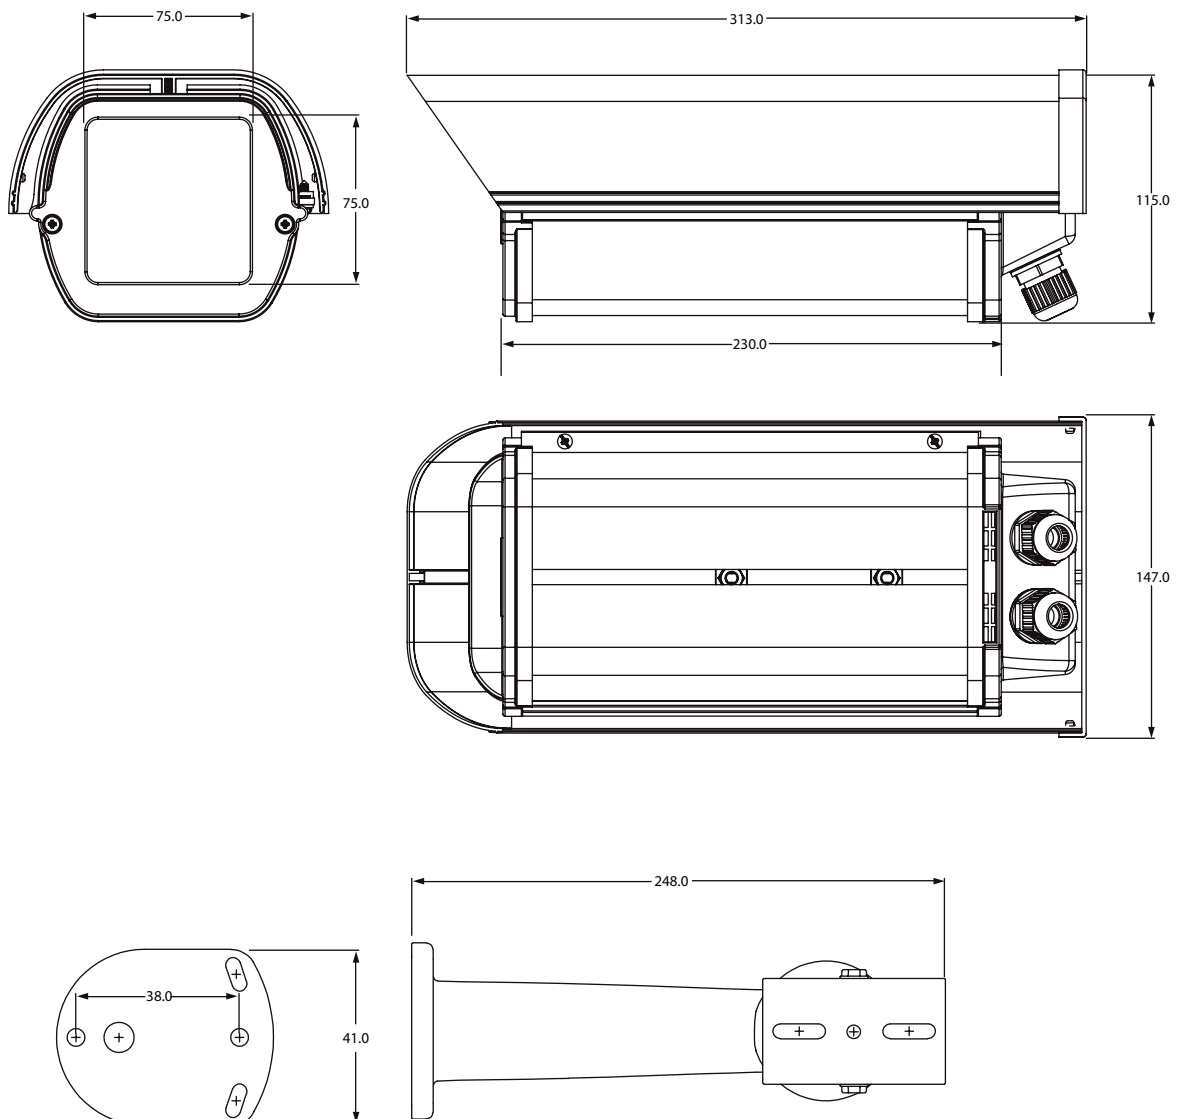

Order Information

BOH-1300: Outdoor Housing for Box Cameras (12VDC/24VAC)

Package Content

BOH-1300
Camera Bracket
Screw Kit
Quick Installation Guide

Optional Accessories



BOH-1001
Pole Mount kit



POI-4000
High Power PoE Injector



POM-1100
PoE Module for
BOH-1100/1200/1300



POR-1100
1-Port Outdoor PoE
Repeater



POR-1102
2-Port Outdoor PoE
Repeater



POS-4001
Outdoor High Power
PoE Splitter (12V)



POW-1201
DC12V/1.25A Switching
Power Adapter



POW-2401
AC 24V Liner Power
Adapter



PPM-1000
PoE Power Measurer