



LevelOne FCS-0030/WCS-0030/FCS-1121/FCS-3061 IP Camera

中文快速安裝手冊



Quick Installation Guide


中文快速安裝手冊適用於：FCS-0030 / WCS-0030 / FCS-1121 / FCS-3061

硬體安裝


1. 請將包裝盒內的電源供應器插上電，並正確的連接到 FCS-0030/WCS-0030/FCS-1121/FCS-3061。
2. 請將網路線連上 FCS-0030/WCS-0030/FCS-1121/FCS-3061 網路埠，和您的 IP 分享器。

網路攝影機搜尋軟體安裝


1. 將 LevelOne 網路攝影機包裝內所附的 CD-ROM 放入光碟機中。
2. 螢幕會自動出現 LevelOne 網路攝影機的安裝畫面。如果沒看到安裝畫面，請到光碟片的路徑中，手動安裝。
3. 點選“Install Software”。

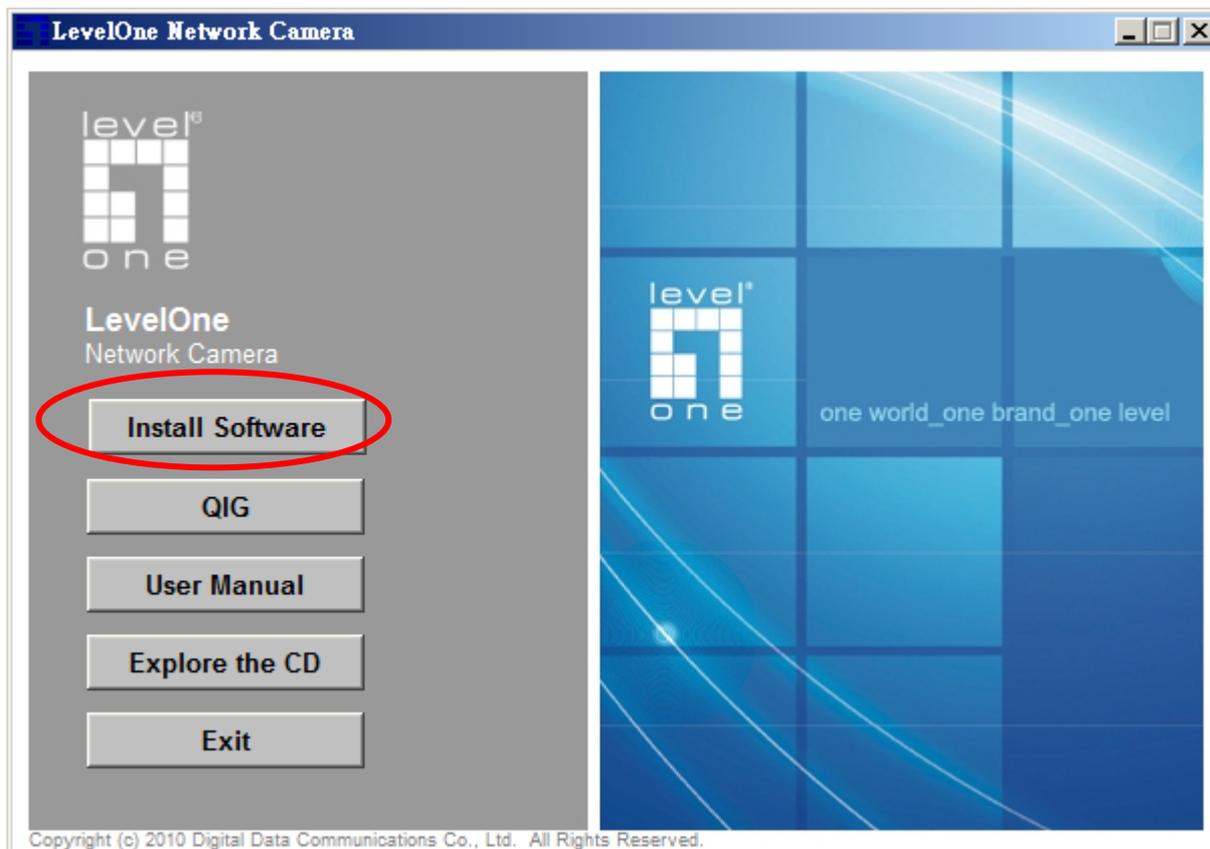


4. 點選“Easy Config”，並開始安裝。

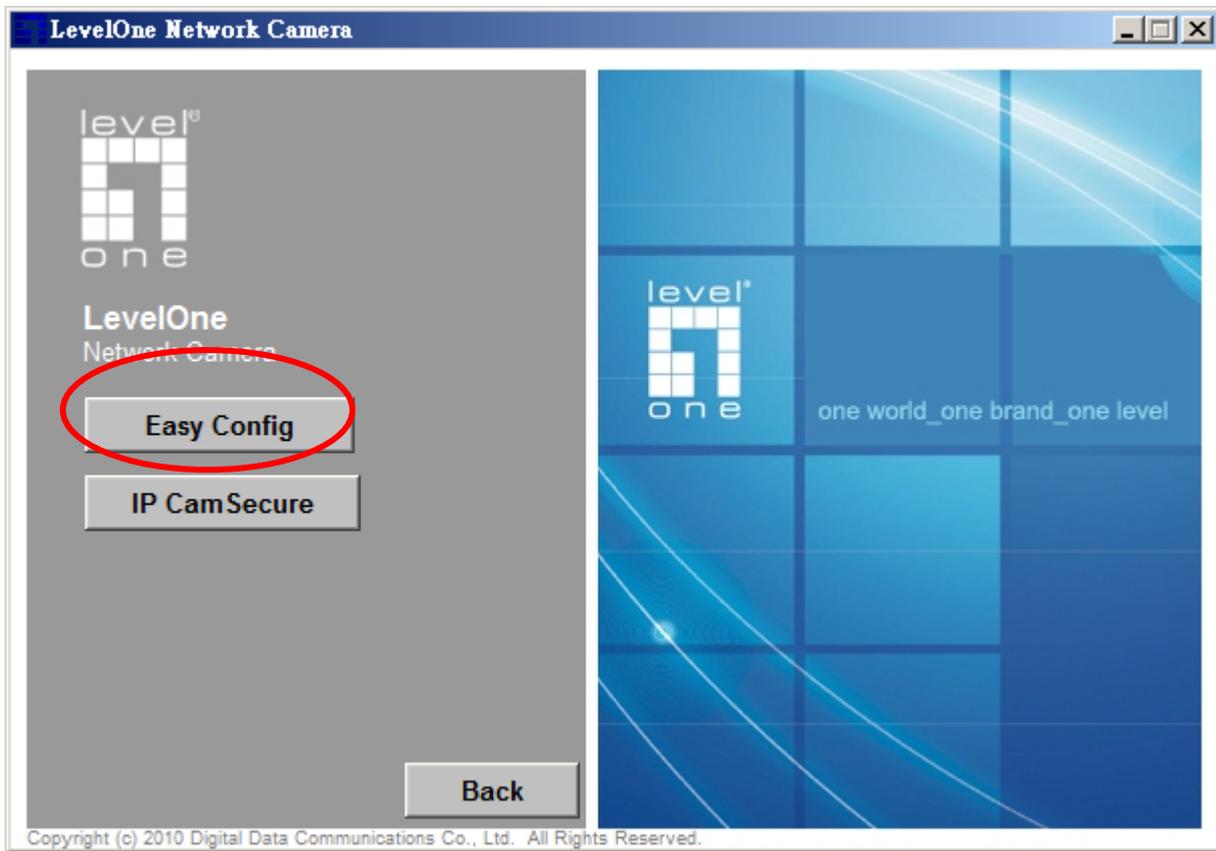


5. 選擇語言後點選“Next”。

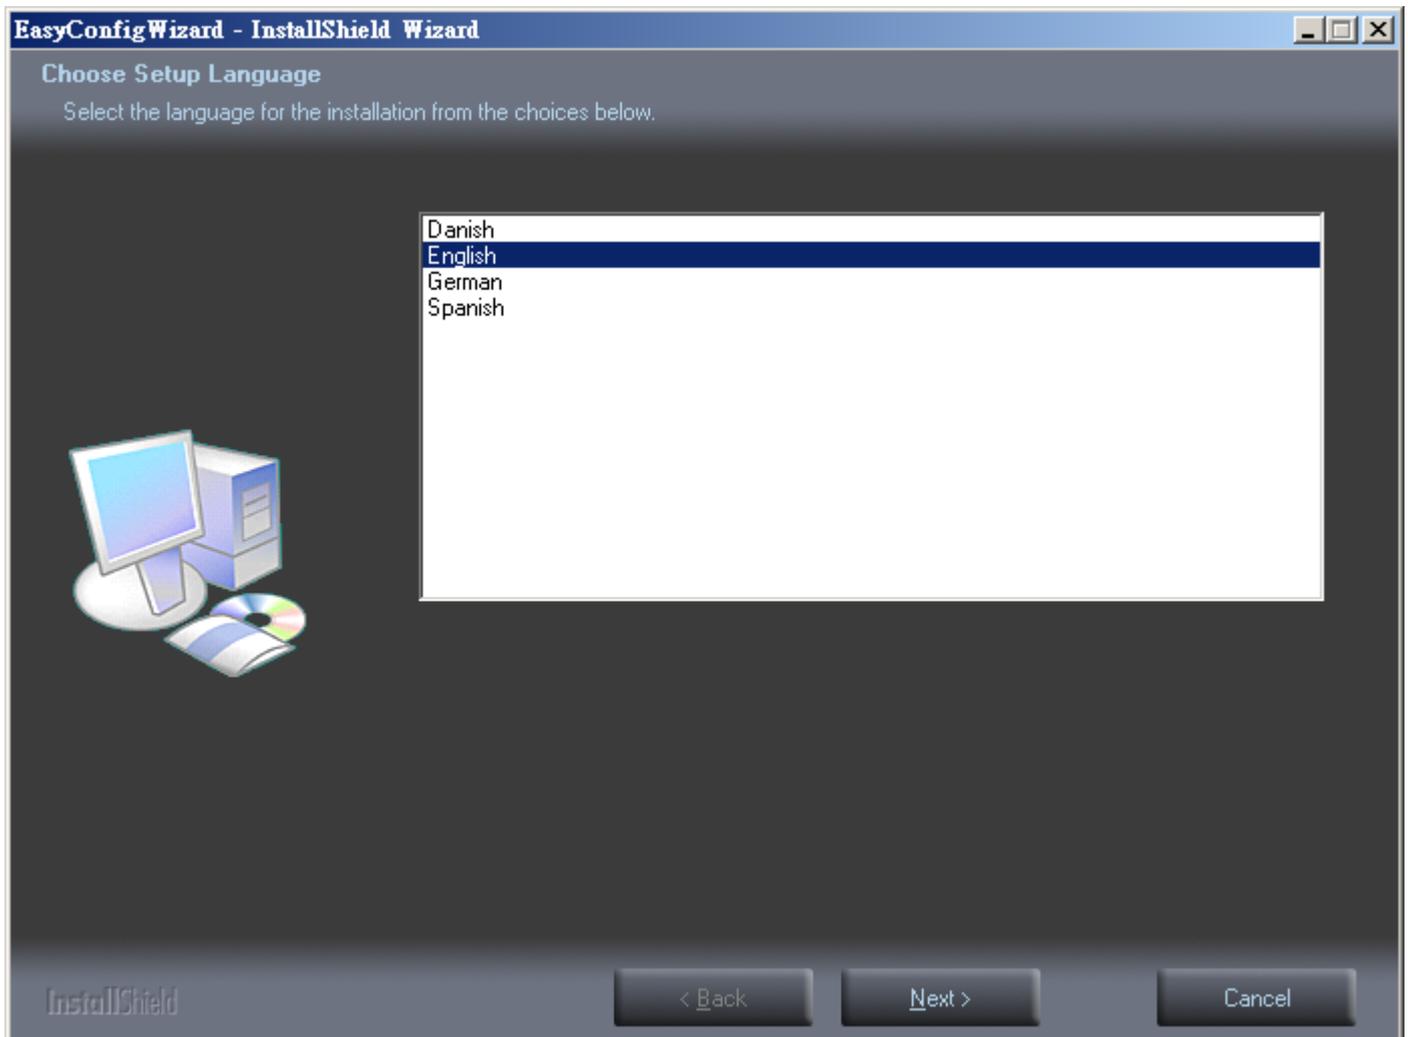


6. 請點選“Next”。

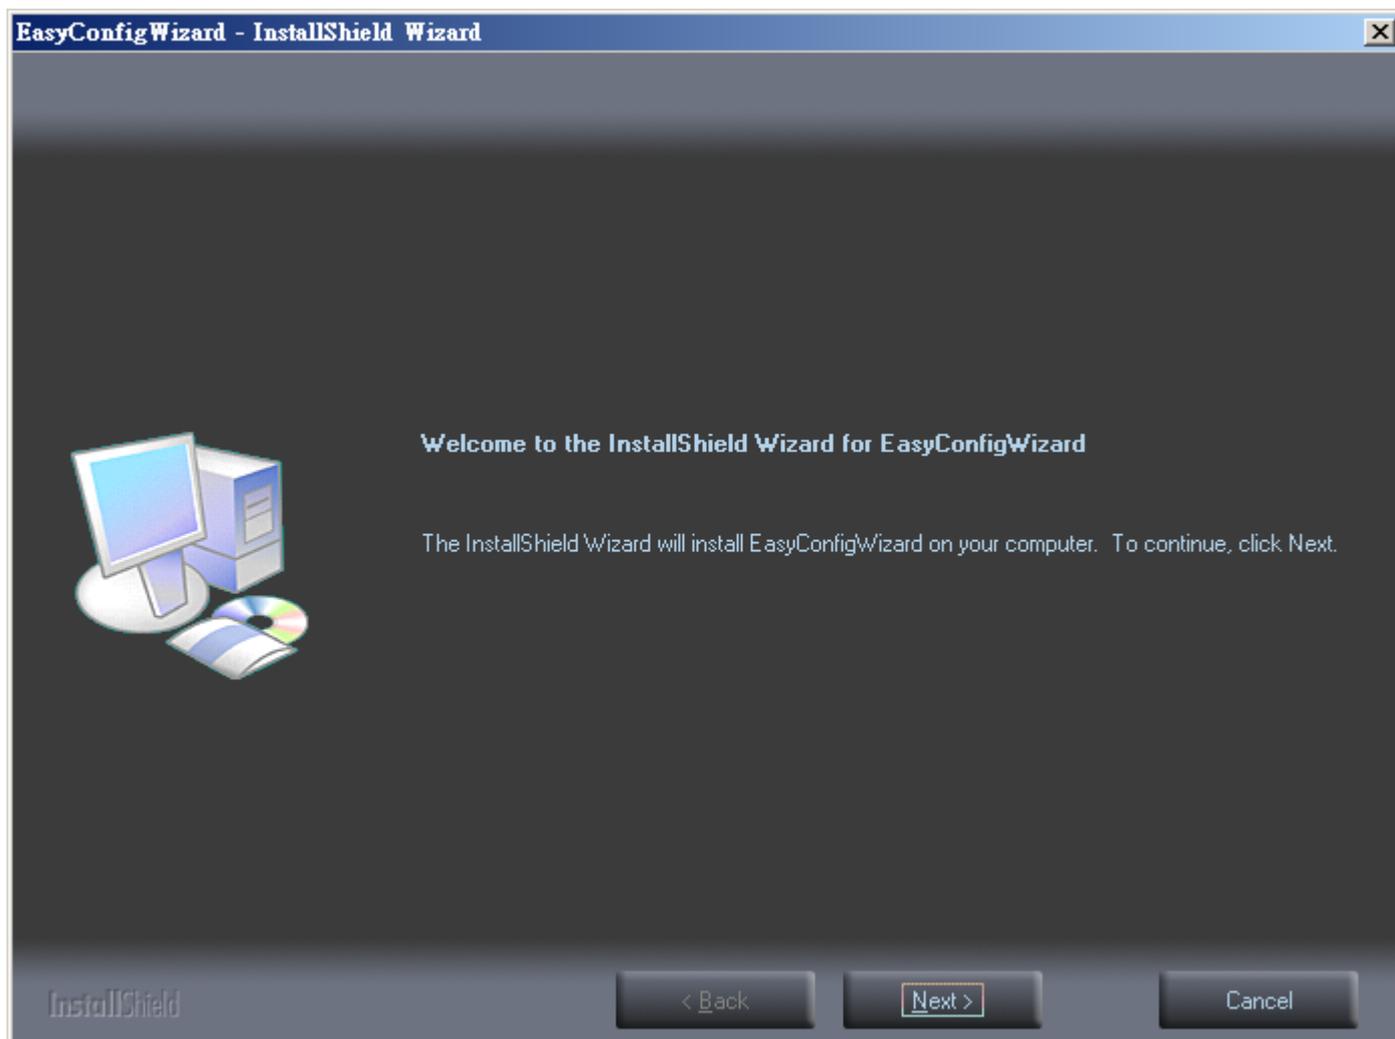


7. 如果您沒有要更換安裝目錄，請點選“Next”。

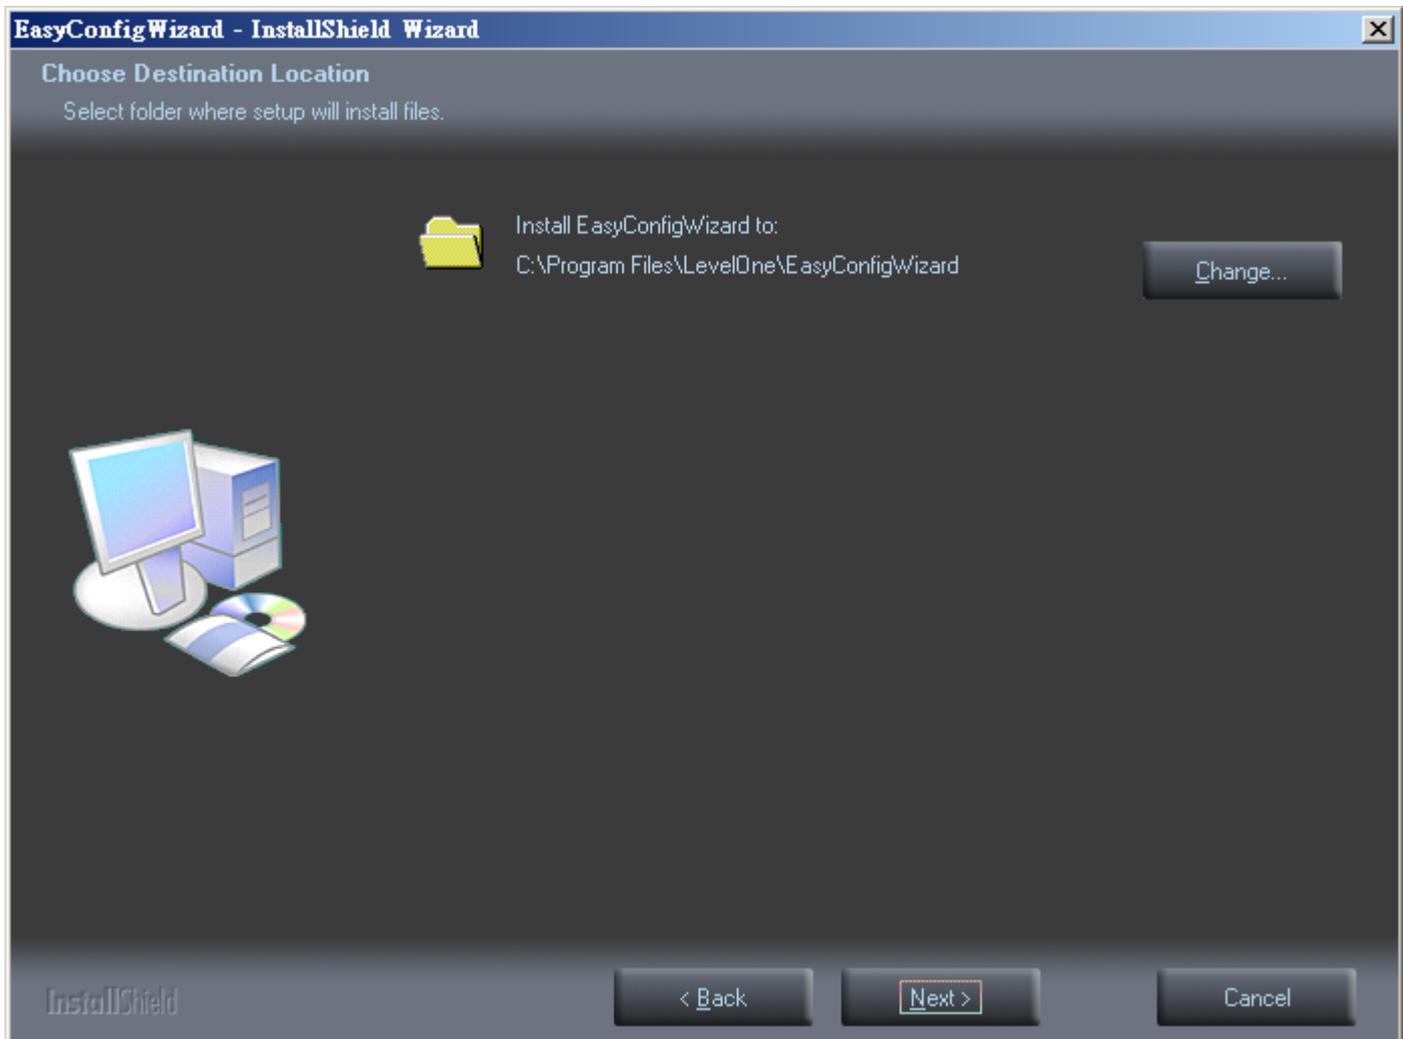

8. 請點選 “Install”。

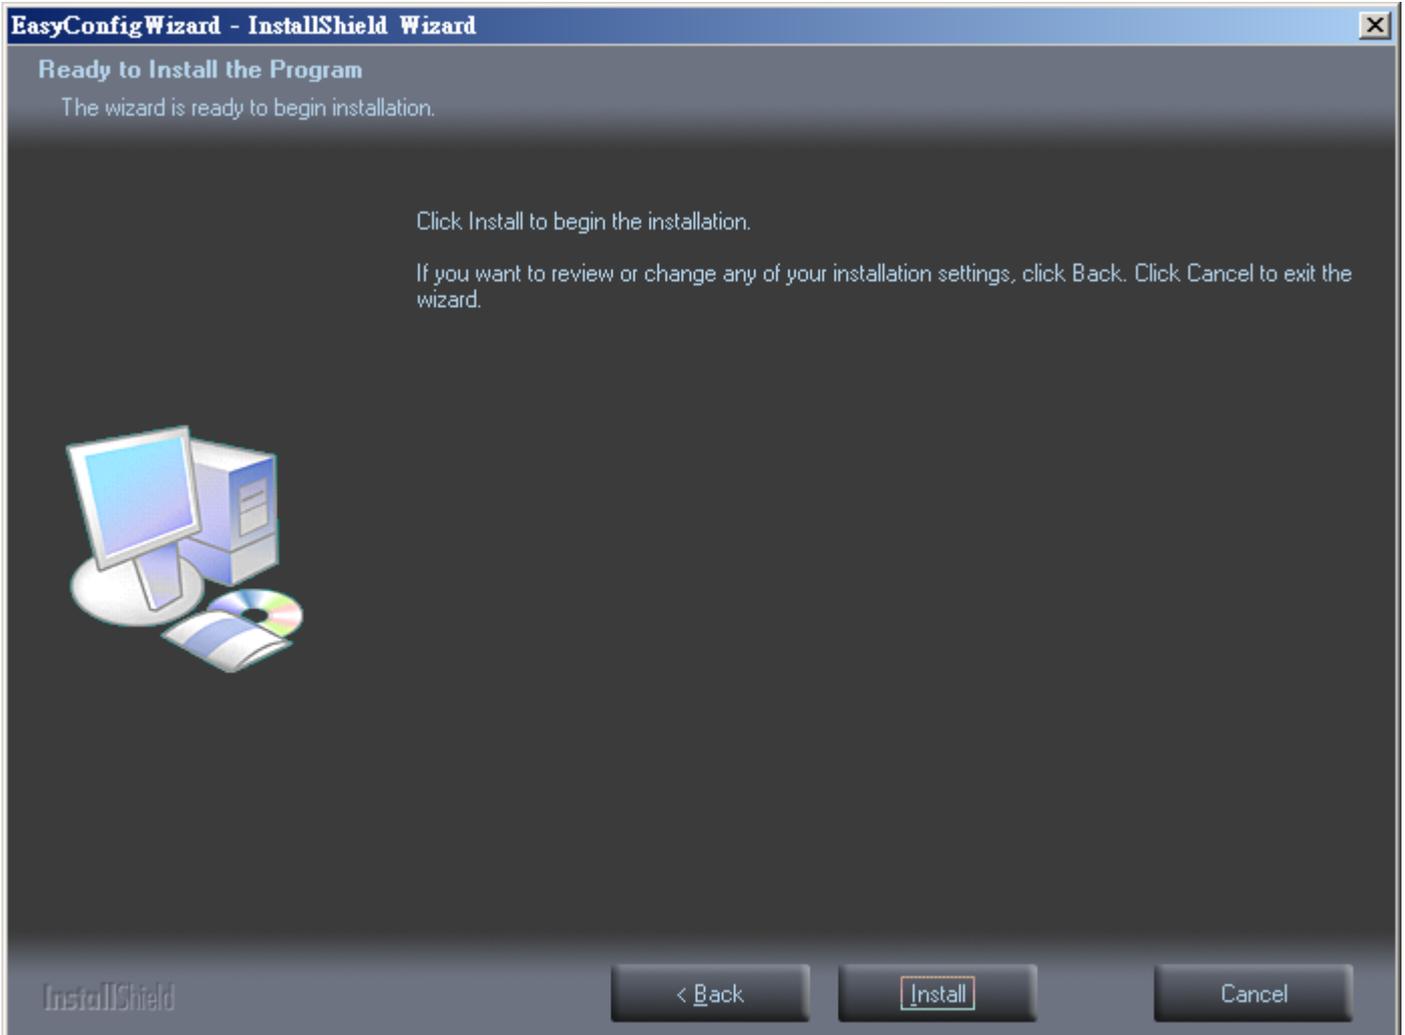

9. 安裝中。

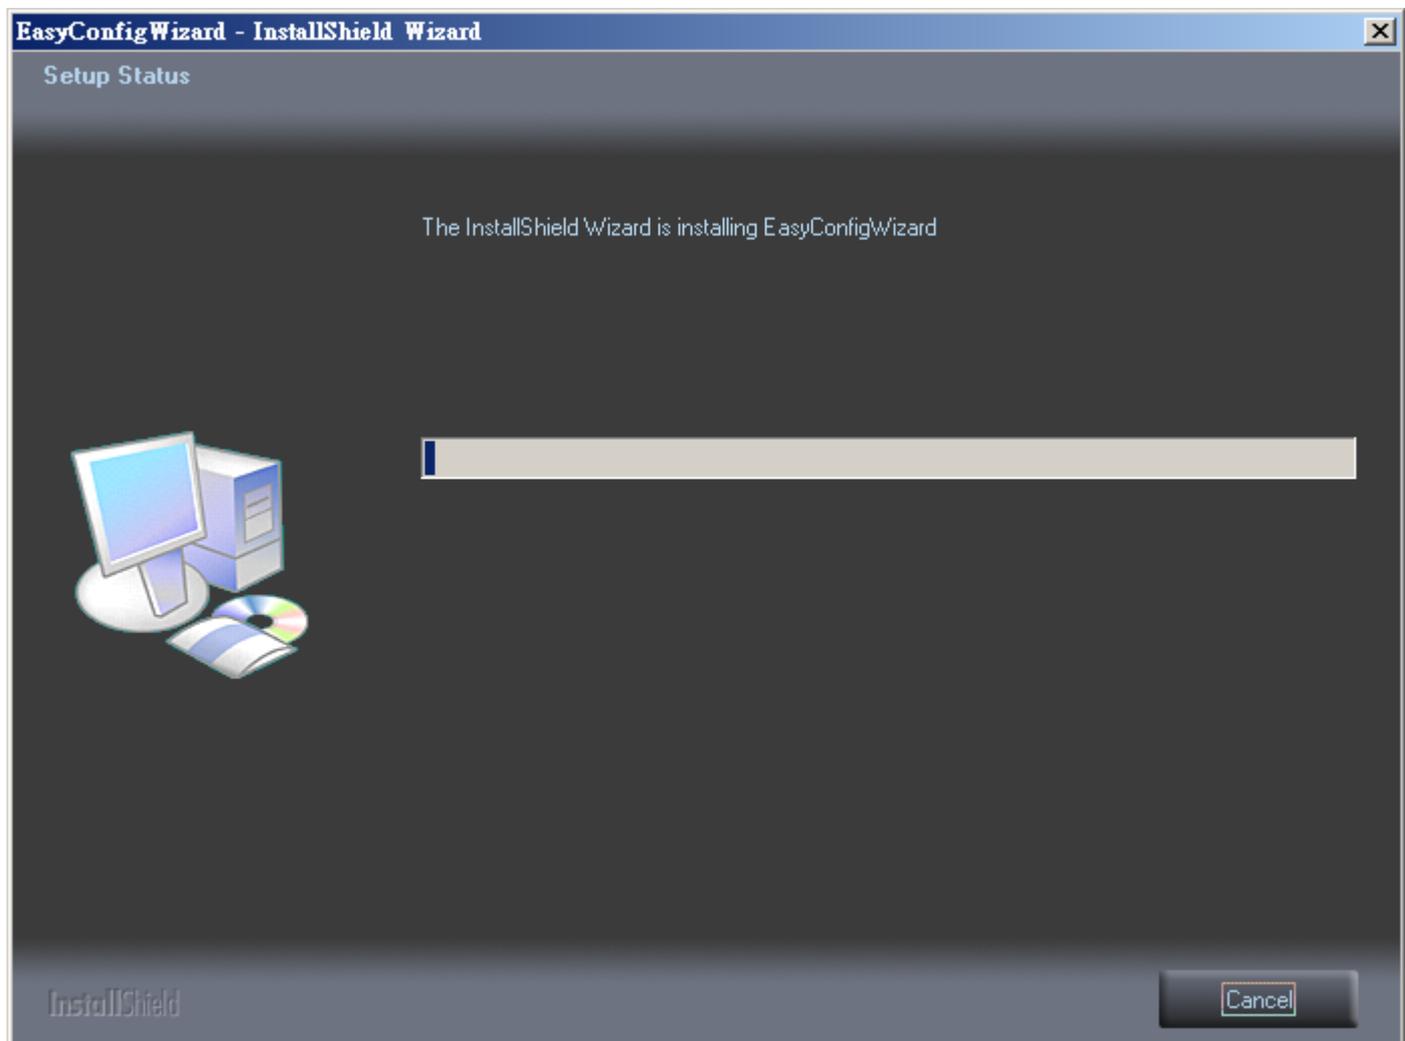

10. 安裝完成後請點選“Finish”。

InstallShield Wizard Complete

The InstallShield Wizard has successfully installed EasyConfigWizard. Click Finish to exit the wizard.



InstallShield

< Back

Finish

Cancel

11. 請您執行 Easy Config Wizard 這個軟體。
12. 請點選 “Start”。



Easy Link

You may use Easy Link setting to connect to the IPCam without to have IP bear in mind.

Enable:

Domain Name: .level1dns2.net

Refresh Time:




20. 您已經完成基本的設定，請點選“Start WEB GUI”。



Congratulations


The installation of the camera is completed.

21. 您的 IE 會要求您下載並安裝 Active X，請您下載並安裝。
22. 您已經可以登入 WCS-0030 看到其影像了。

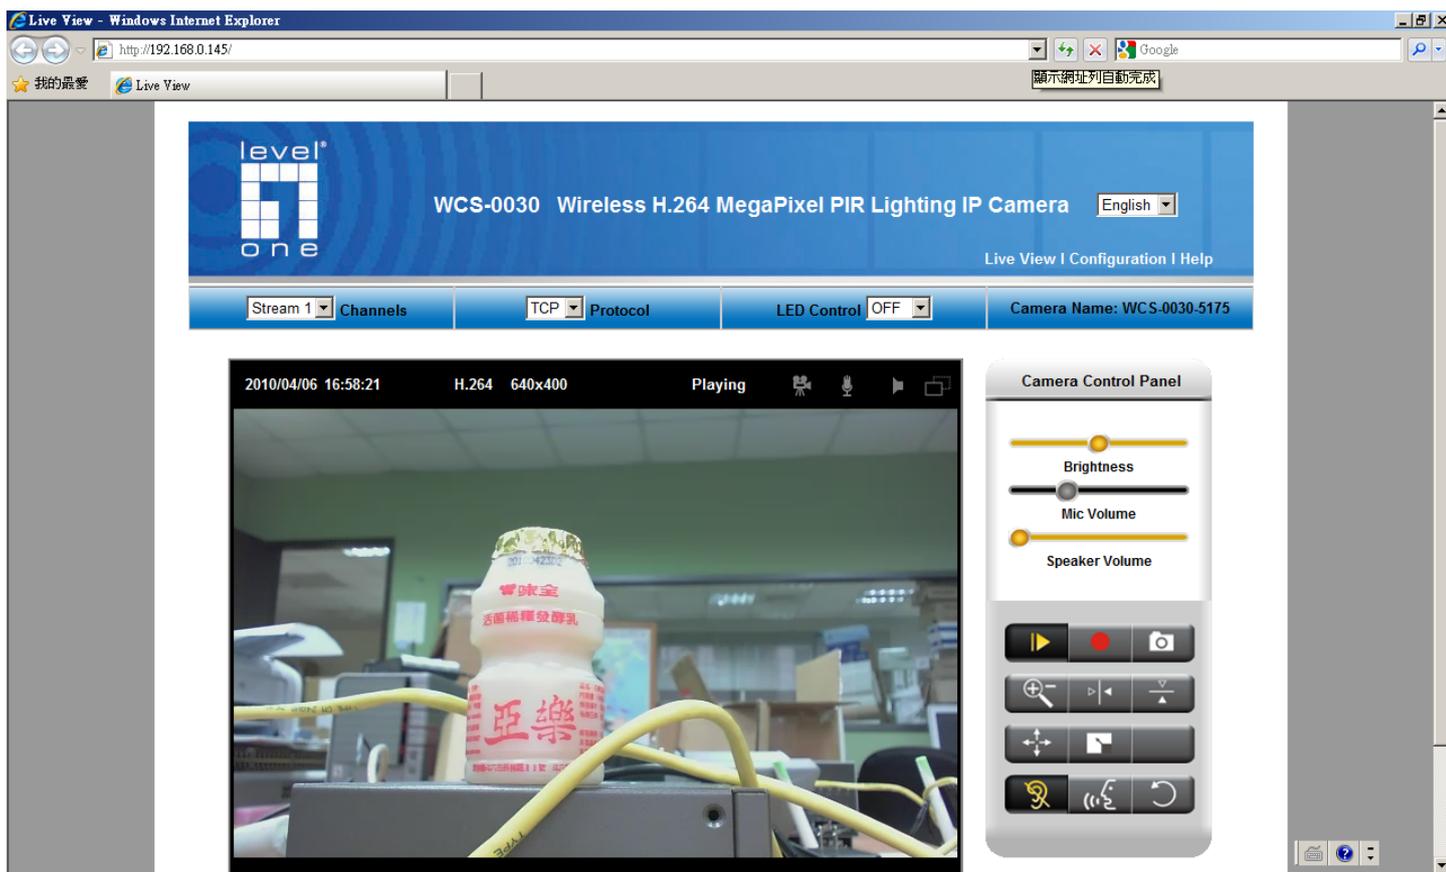


無線網路安裝之說明

1. 我們使用 WBR-6003 的無線設定作為範例。其 SSID 設定為 WBR-6003TSD。

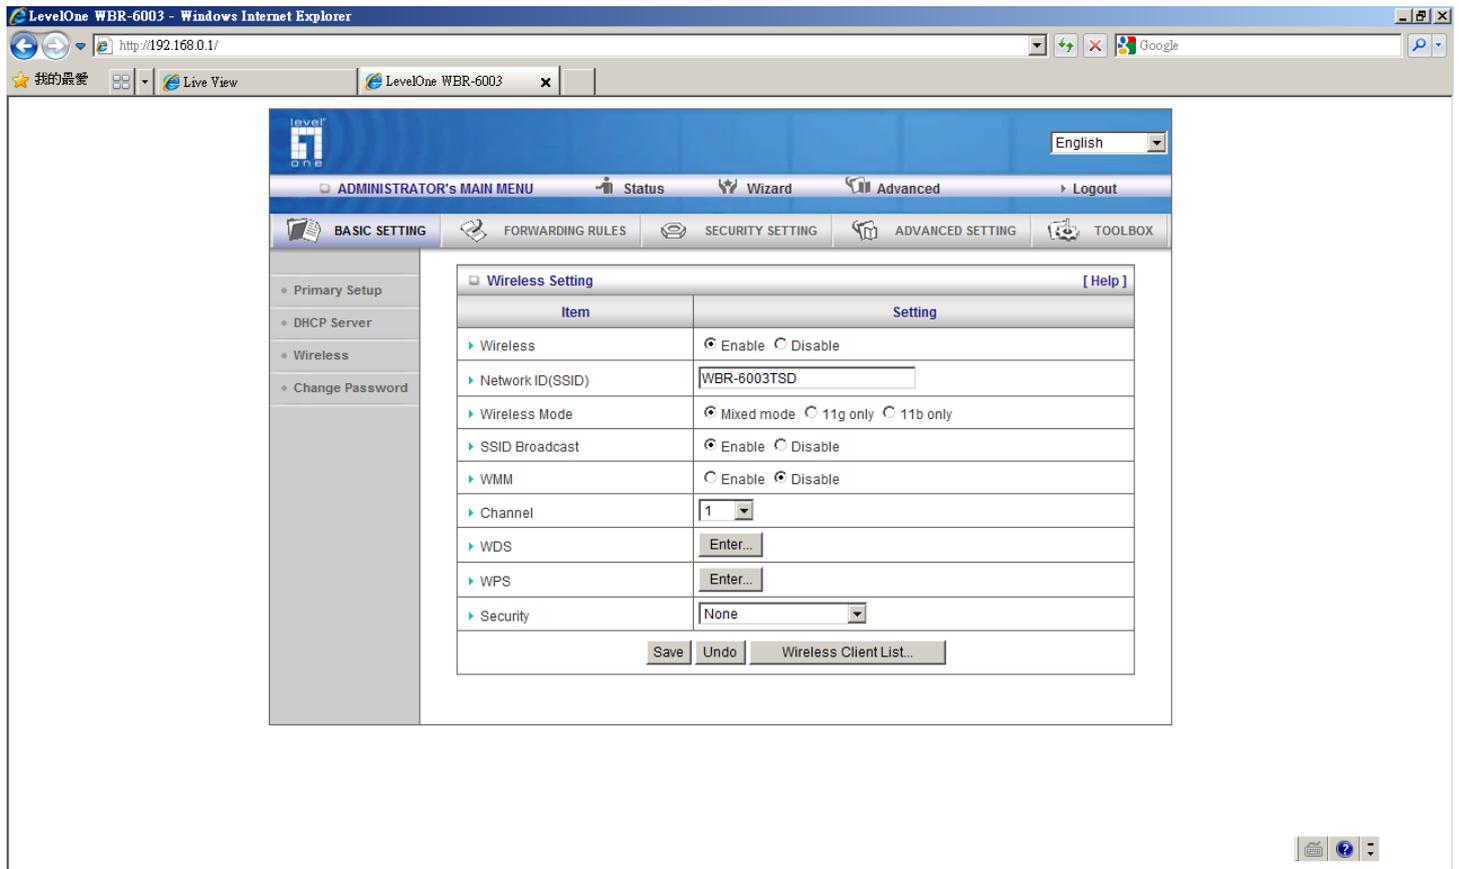


無線網路設定僅適用於：WCS-0030

2. 請點選右上角的 Configuration。

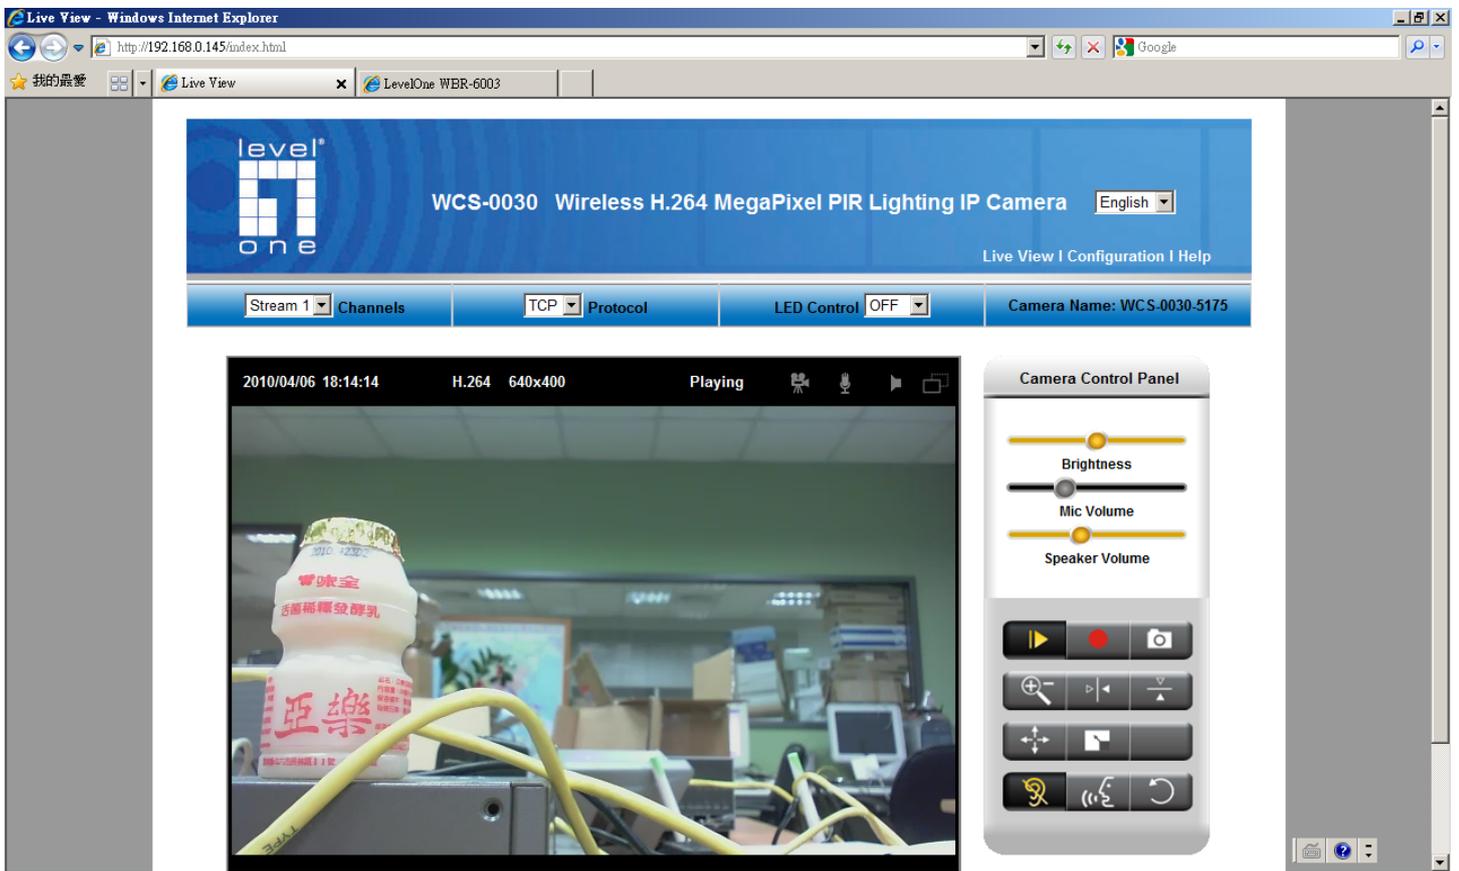

3. 設定無線以前，我們建議您將 WCS-0030 的 IP 改為固定 IP 。
4. Network → IP Setting 。

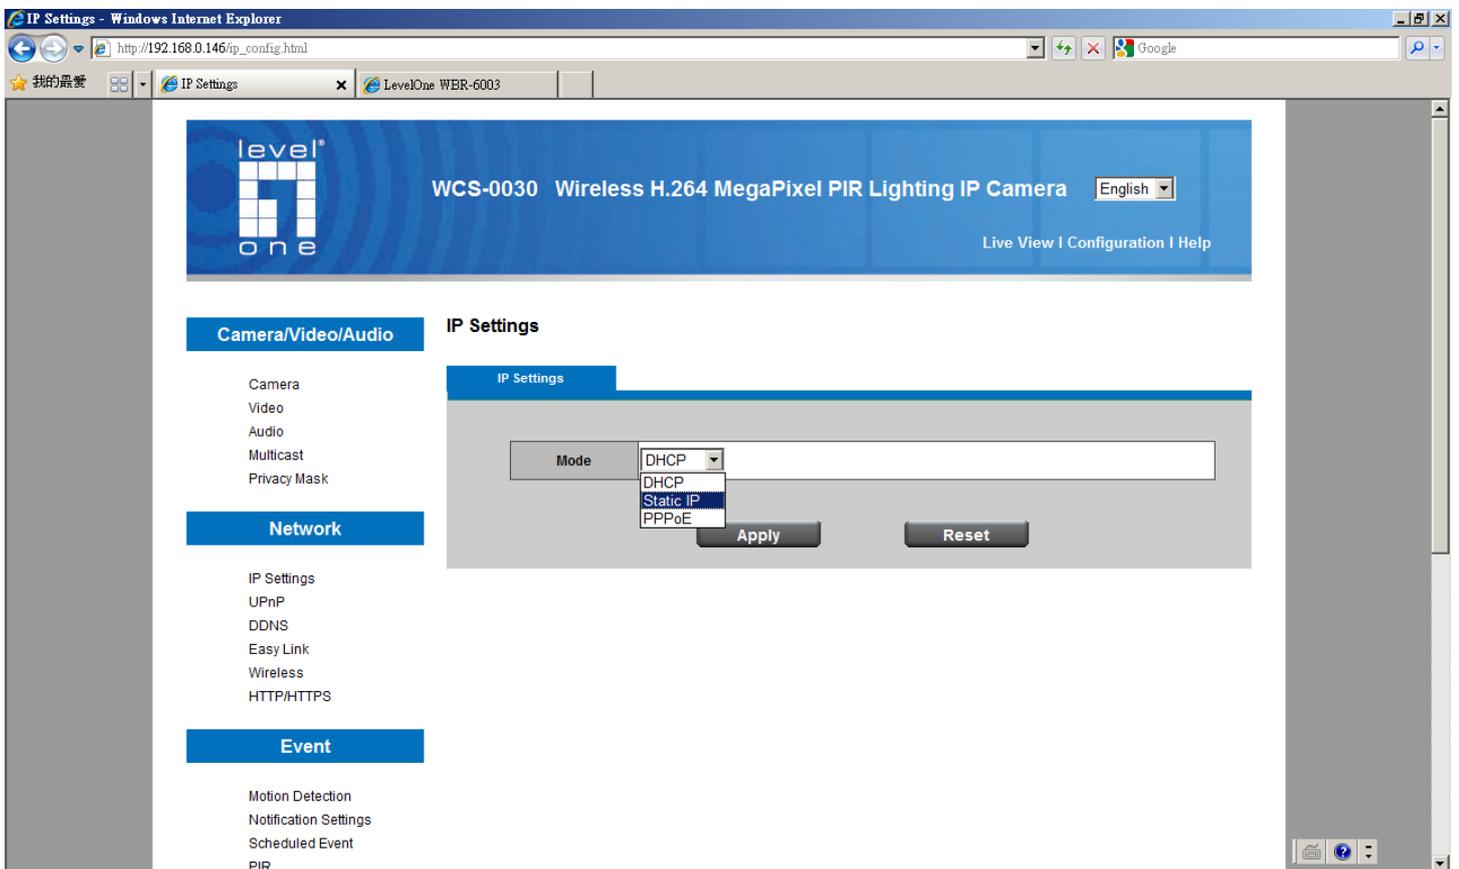

5. 您需要指定一組固定 IP 給 WCS-0030，並設定 Default Gateway 和 DNS 。

6. 設定完成後請按 “Apply”。

level one
WCS-0030 Wireless H.264 MegaPixel PIR Lighting IP Camera English
Live View | Configuration | Help

Camera/Video/Audio IP Settings

Camera
Video
Audio
Multicast
Privacy Mask

Network

IP Settings
UPnP
DDNS
Easy Link
Wireless
HTTP/HTTPS

Event

Motion Detection
Notification Settings
Scheduled Event
PIR

IP Settings

Mode	Static IP
IP Address	192 . 168 . 0 . 100
Subnet Mask	255 . 255 . 255 . 0
Default Gateway	192 . 168 . 0 . 1
Primary DNS	61 . 31 . 1 . 1
Secondary DNS	61 . 31 . 233 . 1

Apply Reset

7. Network → Wireless，請點選 Site survey。

level one
WCS-0030 Wireless H.264 MegaPixel PIR Lighting IP Camera English
Live View | Configuration | Help

Camera/Video/Audio Wireless Configuration

Camera
Video
Audio
Multicast
Privacy Mask

Network

IP Settings
UPnP
DDNS
Easy Link
Wireless
HTTP/HTTPS

Event

Motion Detection
Notification Settings
Scheduled Event
PIR

Basic Settings Advanced Settings Wi-Fi Protected Setup

Network Name (SSID) WBR-6003TSD Site survey

Network Type Infrastructure mode Ad-hoc mode

Security Disabled

Apply Reset

Site Survey List

SSID	Mode	Security	Channel	Signal	Type	Select
WBR-6003TSD	11b/g/n	NONE	1	100%	Infrastructure	Select
LevelOne_1	11b/g	NONE	1	99%	Infrastructure	Select
WBR-6020TSD	11b/g/n	NONE	1	47%	Infrastructure	Select
6022-test	11b/g/n	WPA-PSK/WPA2-PSK	6	68%	Infrastructure	Select
AB 12 !.@	11b/g/n	NONE	6	100%	Infrastructure	Select

8. 如果您的環境中有無線基地台，您應該會看到他的 SSID，點選“Select”按鈕。我們這裡是使用 WBR-6003TSD 做為範例。
9. 選擇完以後請按 Apply。

level one
WCS-0030 Wireless H.264 MegaPixel PIR Lighting IP Camera English
Live View | Configuration | Help

Camera/Video/Audio
Camera
Video
Audio
Multicast
Privacy Mask

Network
IP Settings
UPnP
DDNS
Easy Link
Wireless
HTTP/HTTPS

Event
Motion Detection
Notification Settings
Scheduled Event
PIR

Basic Settings | Advanced Settings | Wi-Fi Protected Setup

Network Name (SSID): WBR-6003TSD Site survey
Network Type: Infrastructure mode Ad-hoc mode
Security: Disabled

Apply Reset

Site Survey List

SSID	Mode	Security	Channel	Signal	Type	Select
WBR-6003TSD	11b/g/n	NONE	1	100%	Infrastructure	Select
LevelOne_1	11b/g	NONE	1	99%	Infrastructure	Select
WBR-6020TSD	11b/g/n	NONE	1	47%	Infrastructure	Select
6022-test	11b/g/n	WPA-PSK/WPA2-PSK	6	68%	Infrastructure	Select
AB 121.@	11b/g/n	NONE	6	100%	Infrastructure	Select

10. 這時您應該可以將網路線拔下來。



11. 此時您可以透過無線的方式瀏覽畫面。

Live View - Windows Internet Explorer
http://192.168.0.100/index.html

我的最愛 Live View LevelOne WBR-6003

level[®]
one

WCS-0030 Wireless H.264 MegaPixel PIR Lighting IP Camera English

Live View | Configuration | Help

Stream 1 Channels TCP Protocol LED Control OFF Camera Name: WCS-0030-5175

H.264 640x400 Playing



Camera Control Panel

Brightness

Mic Volume

Speaker Volume

Play Stop Camera


Zoom In Zoom Out

Reset


Refresh

Surveillance System QIG

1. 將 LevelOne 網路攝影機包裝內所附的 CD-ROM 放入光碟機中。
2. 螢幕會自動出現 LevelOne IP 網路攝影機的安裝畫面。如果沒看到安裝畫面，請到光碟片的路徑中，手動安裝。
3. 點選 “Install Software”，您也可以上 www.level1.com 網站下載最新版的 IP Cam Secure 監控軟體。

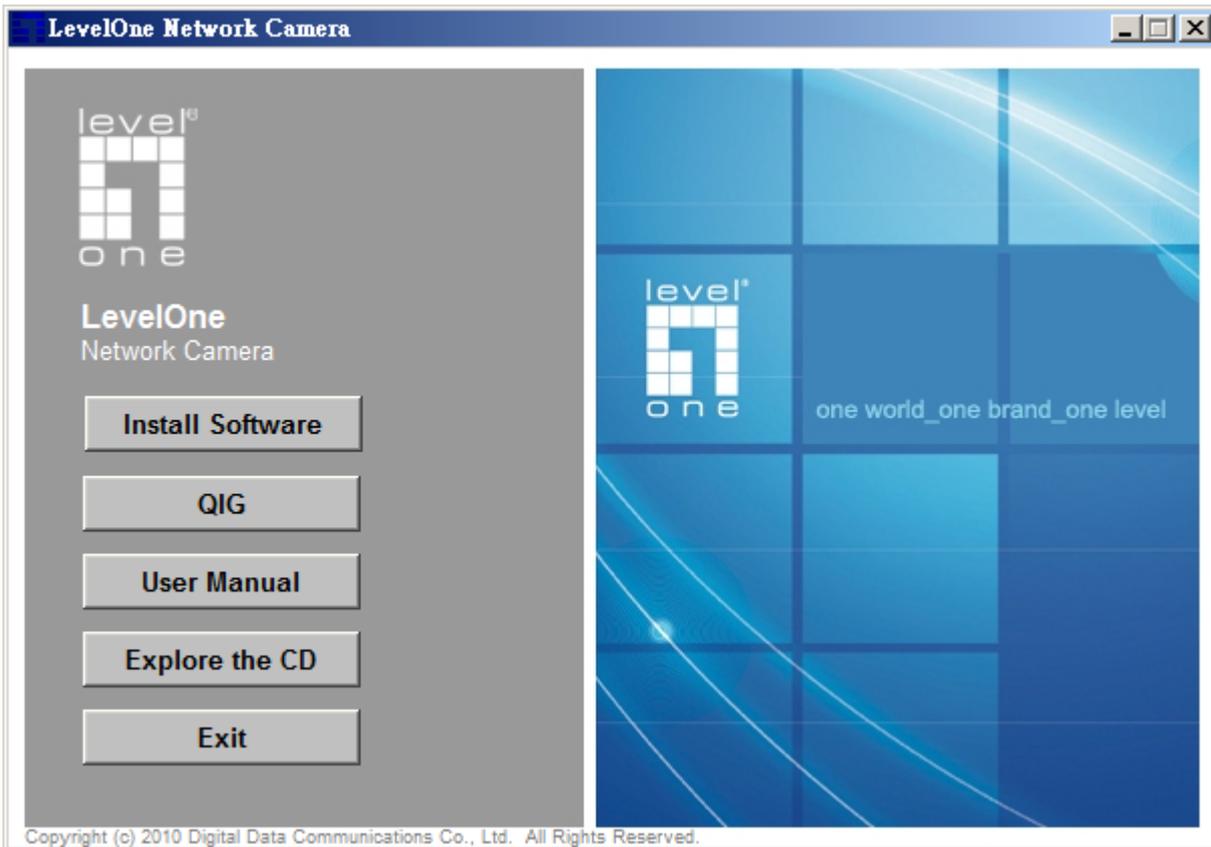


4. 請點選 IP Cam Secure。

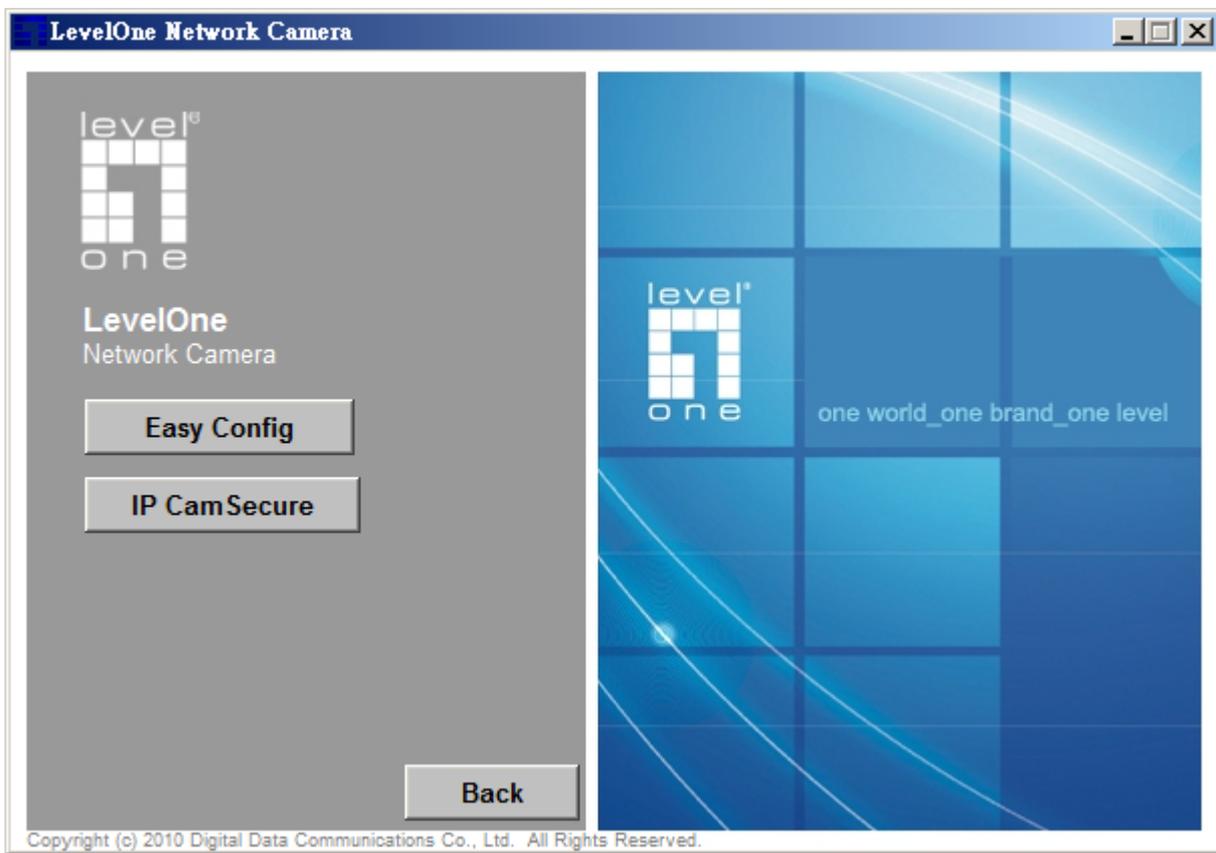

5. 請選擇您要安裝的語言。



6. 請點選下一步。

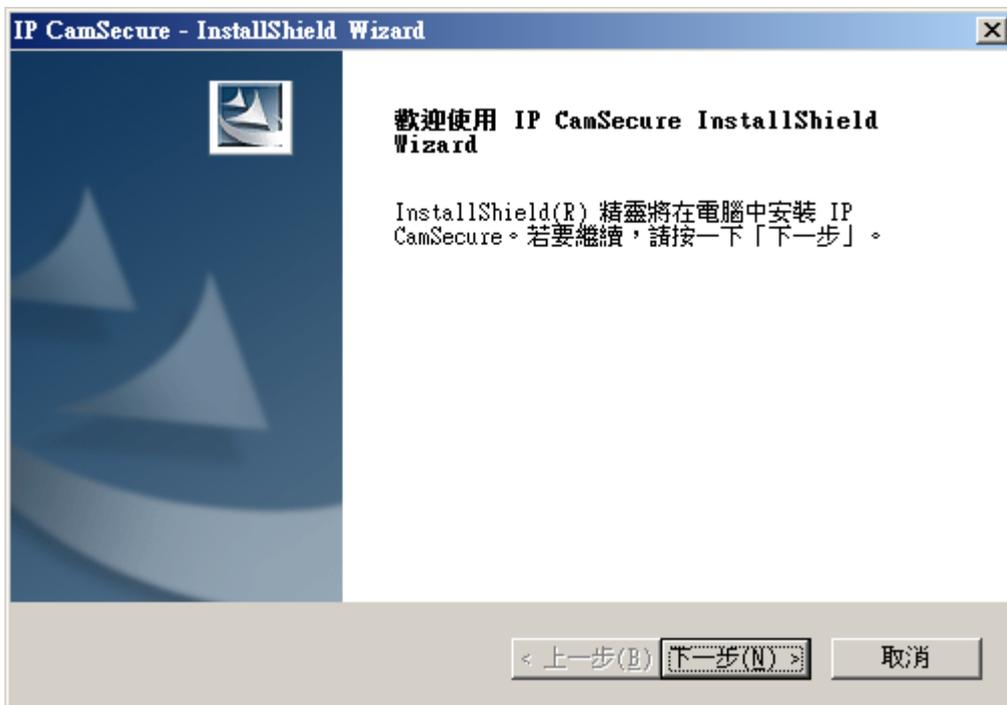

7. 請點選接受合約，然後按”下一步”。




8. 請輸入使用者名稱和公司名稱。



9. 請選擇完整安裝，按下一步。




10. 請點選”安裝”。

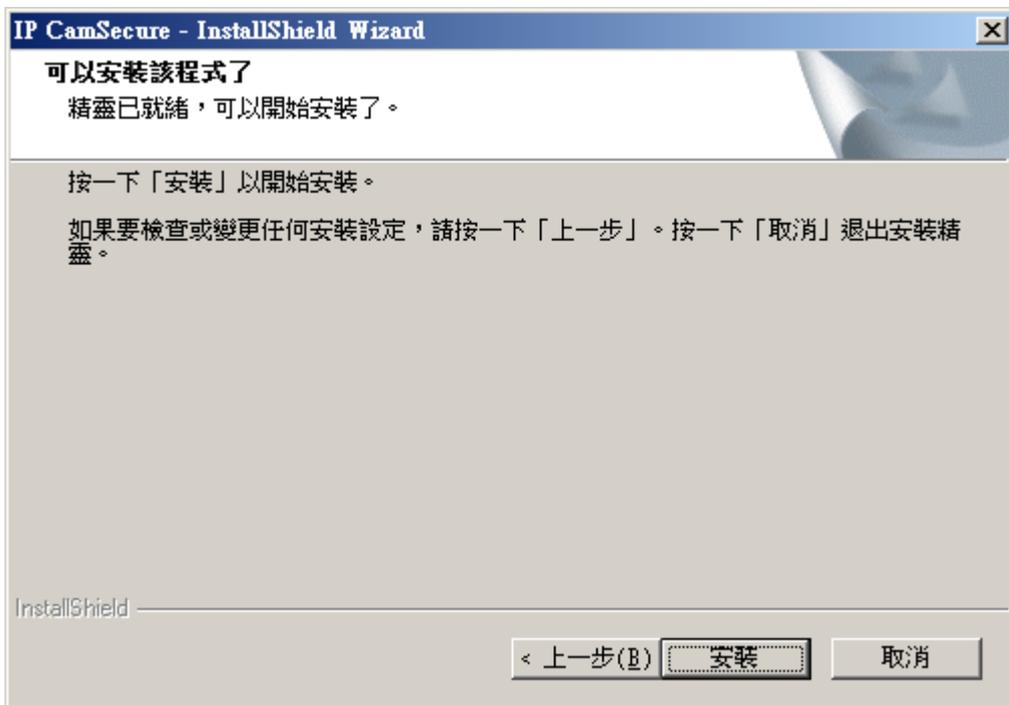


11. 安裝中。



12. 請點選”完成”。

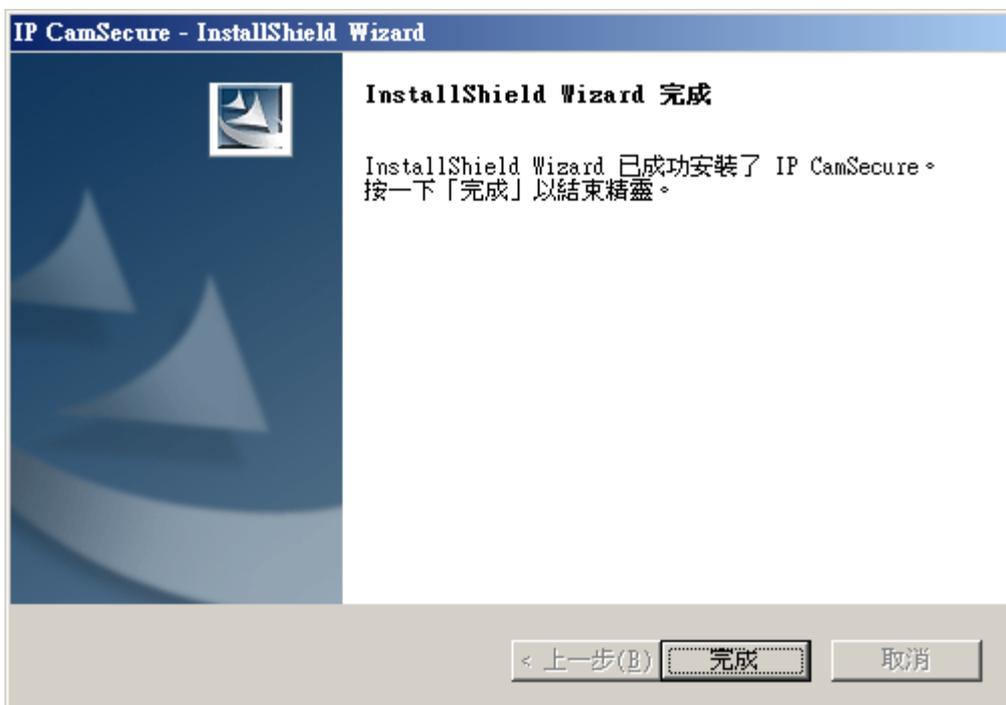

13. 此時點選 開始→程式集→LevelOne→IP CamSecure→Main Console。

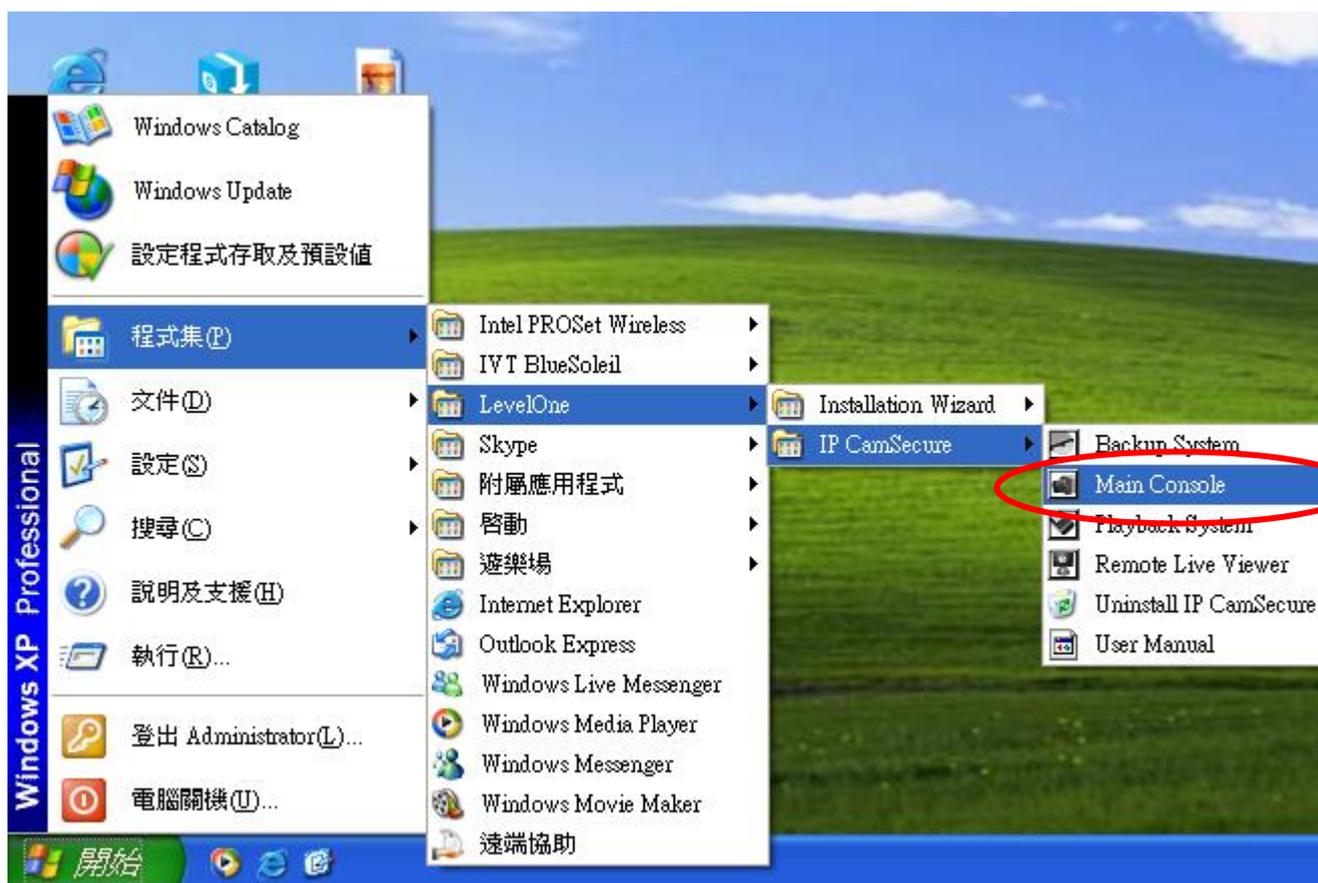


14. 跳出此視窗，請在密碼與密碼確認中輸入您想要的密碼。(日後登入時都要輸入此密碼)




15. 請選擇設定→系統設定。




16. 請選擇 攝影機 這一頁，請按搜尋。

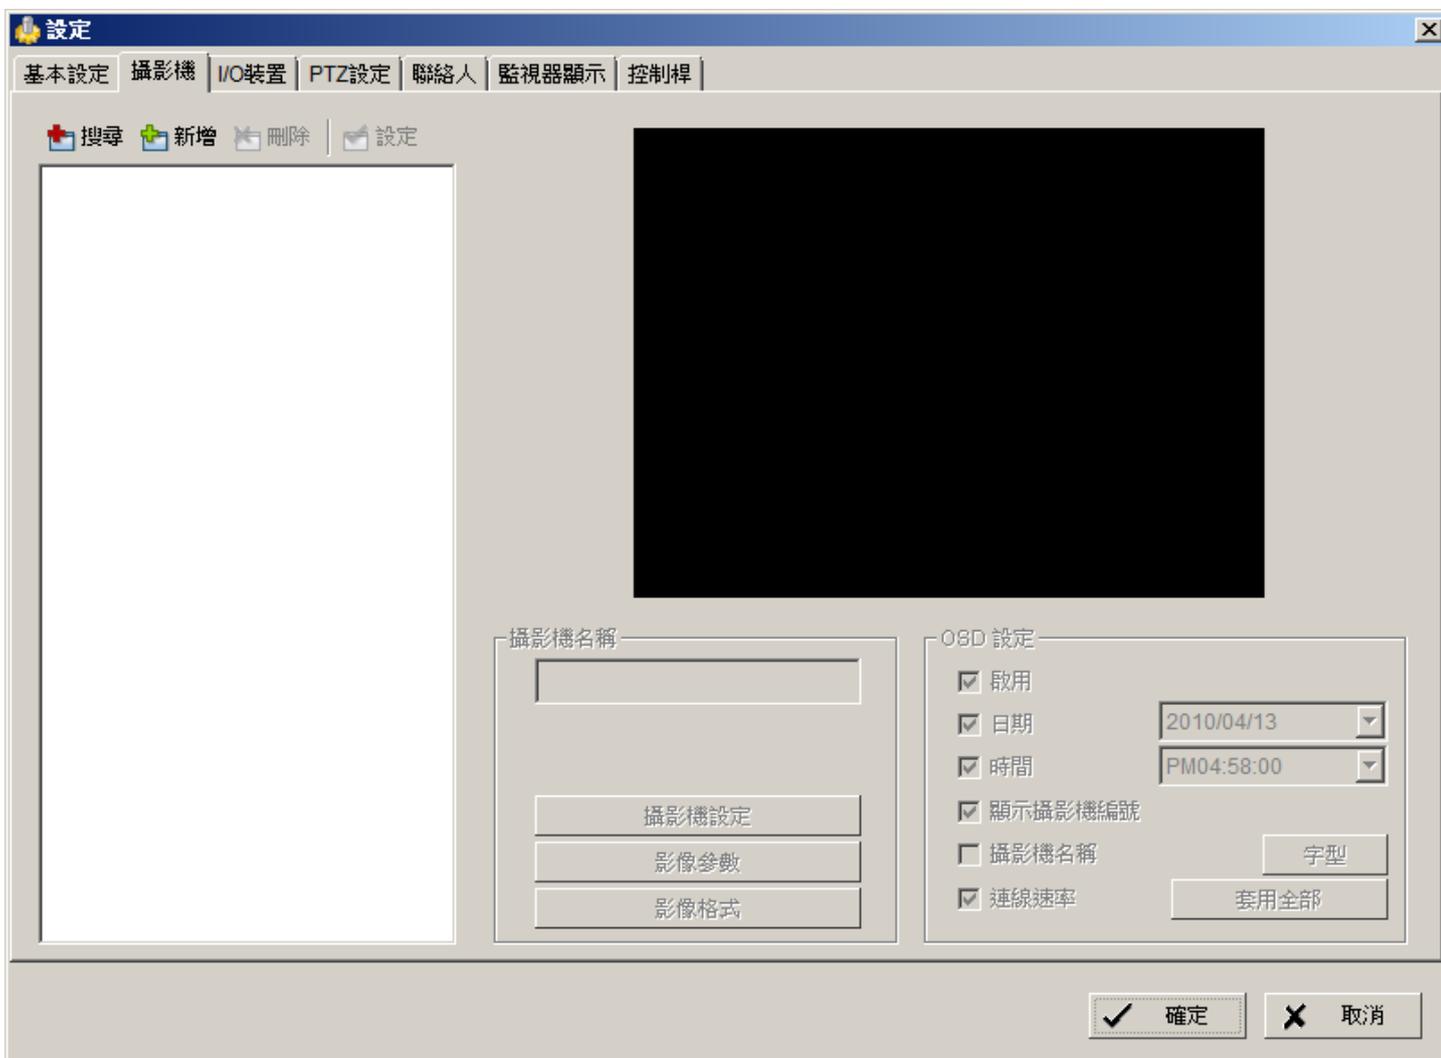


17. 已搜尋到剛才安裝過的 WCS-0030。

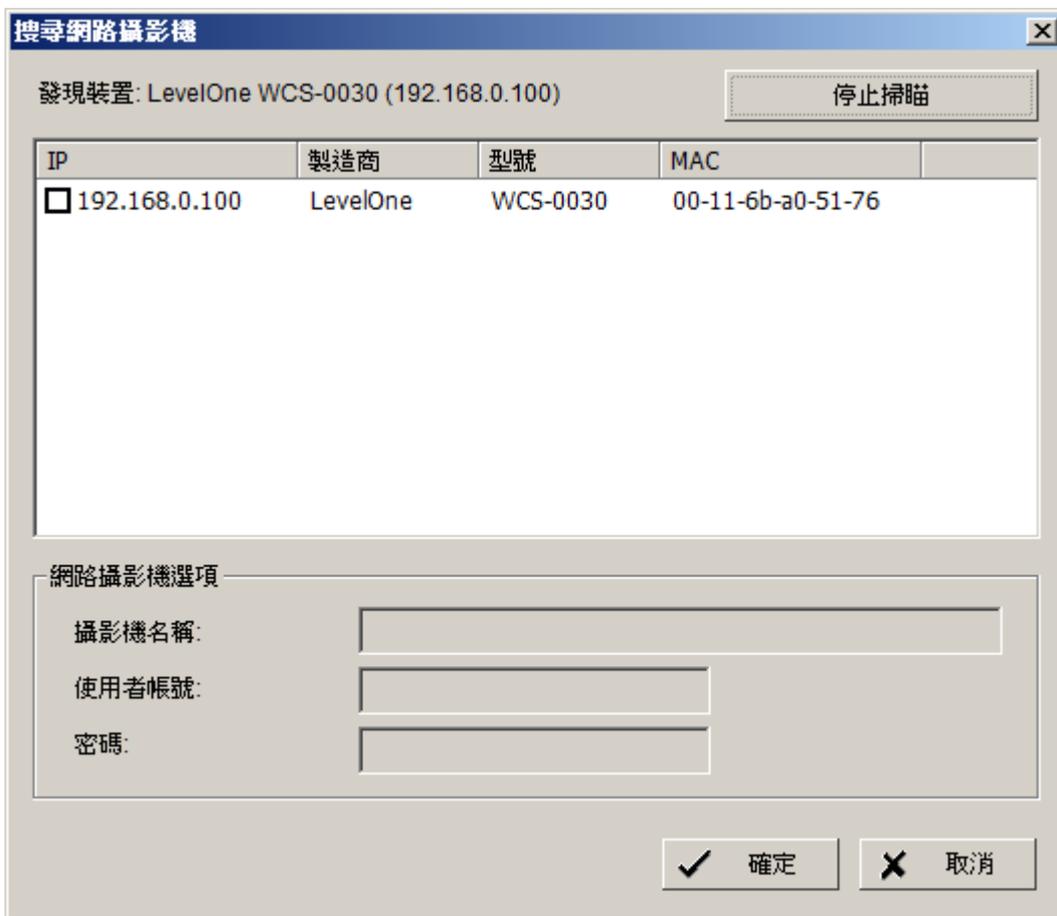

18. 請點選 WCS-0030 然後輸入其帳號和密碼，預設是 admin/admin。

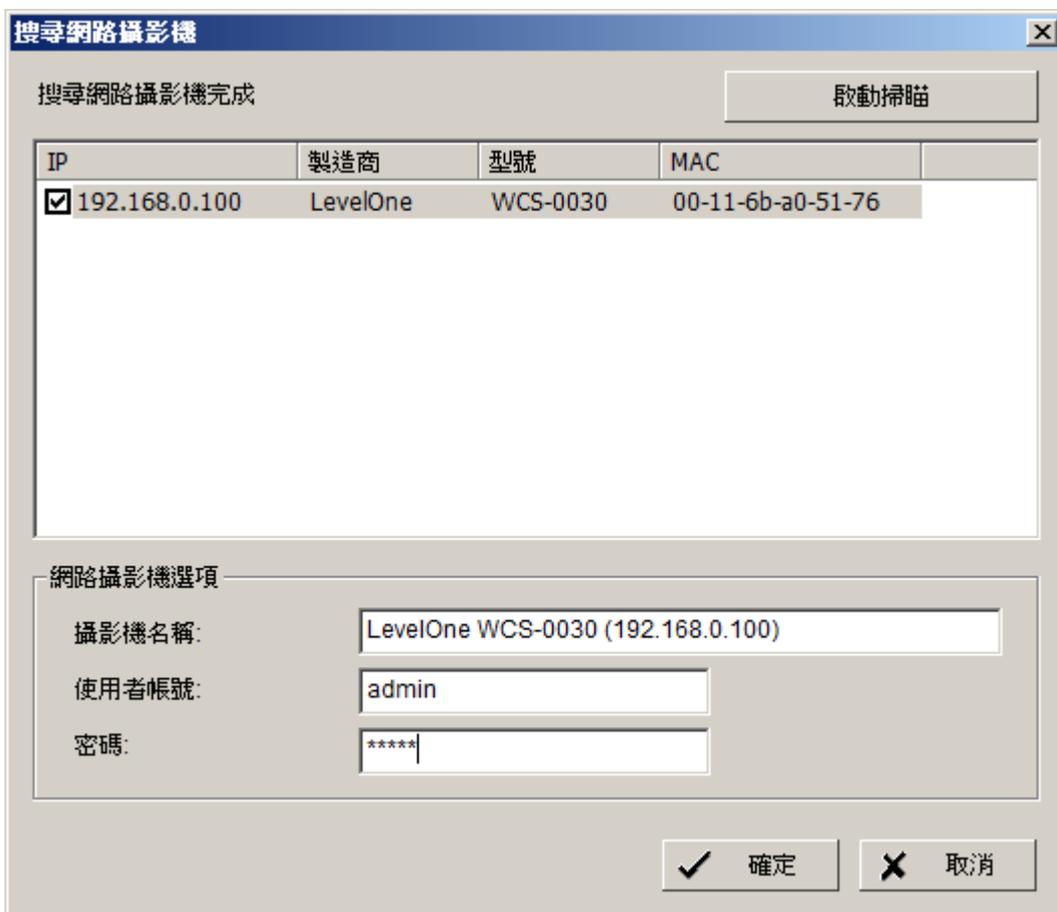

19. WCS-0030 已經增加進來了，請點選”確定”。

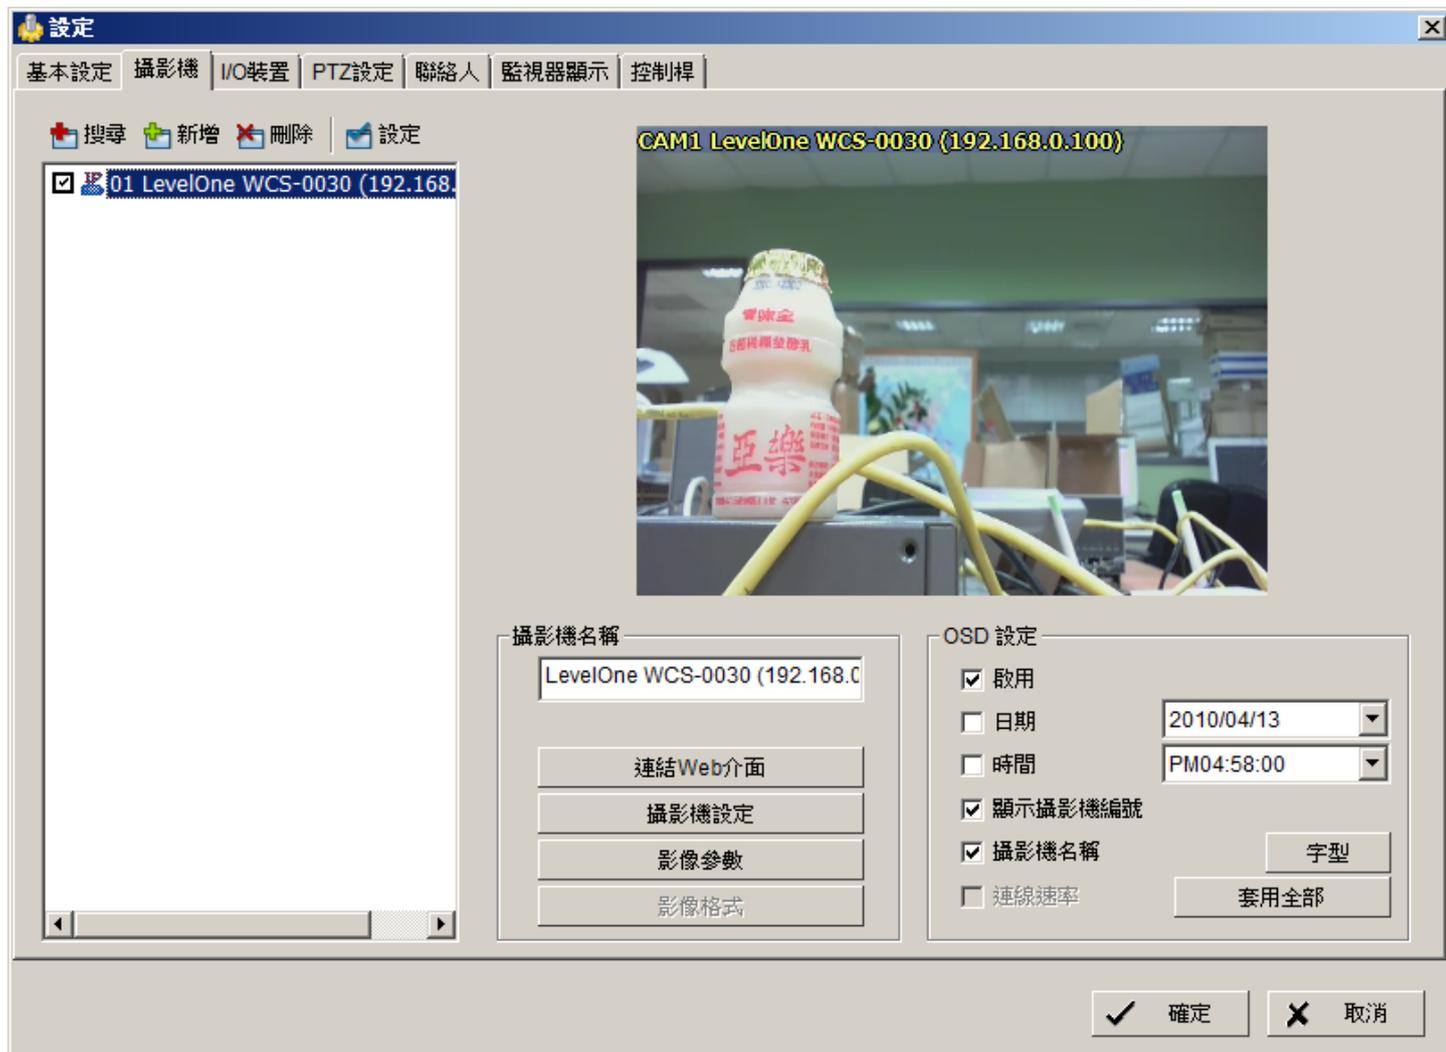

20. 您可以開始使用監控軟體。

CAM1 LevelOne WCS-0030 (192.168.0.100)



IP CamSecure

2010/04/13
17:00:14

剩餘:5.4 GB

設定 標設點 靜音

- 焦距 +



加速 集區



啓動 回放 排程 智慧監測 設定

