



1W, 4L Broadband Router



FBR-1418TX

H/W Version: 1

Router and Switch

LevelOne's FBR-1418TX is a high-performance Broadband Router with an integrated 4-port switch. Up to 4 workstations can connect to this router via 4 10/100 Ethernet ports that support solid throughput and Auto-Crossover cable detection function.

FBR-1418 supports multiple WAN connection methods such as static IP addresses, dynamic IP addresses, PPPoE, L2TP and PPTP connections.

Security

For elevated security, FBR-1418TX supports NAT firewall with SPI mode to protect the network against DoS attacks and also features VPN

pass-through by IPSec, PPTP, L2TP to prevent unwanted access to data transfers.

Easy Configuration

System configuration, maintenance and firmware upgrades are easy through FBR-1418TX's web-based management feature. By using any web browser, the wizard walks you through the whole configuration process step-by-step.

The interface also allow users to configure all advanced settings of the FBR-1418TX, including making access restrictions, setting administration and user passwords, and creating system logs.



- 1. LED Indicators
- 2. LAN Interface
- 3. WAN Interface
- 4. Power Port
- 5. Reset Button

Key Features

- Integrate with 4 port Fast Ethernet switch: 10/100Mbps MDI/MDIX Auto-Sensing
- Provide 10/100Mps WAN interface to connect with DSL or cable modem
- Built-in NAT function: allow multiple PCs and devices to share one Internet connection
- Built-in firewall to protect your local network
- VPN support: pass through of PPTP, L2TP, and IPSec
- Web-based interface configuration and management
- Easy to upgrade using Web or Windows Utility

Works Well With



FCS-0010
10/100 Mbps Network Camera



WAP-3000
11g Wireless AP

Technical Specification

LAN-Interface

4x 10/100 Mbps Auto-MDIX RJ-45 Port

WAN-Interface and Standards

1x 10/100 Mbps Auto-MDIX RJ-45 Port

Static-IP Address, Dynamic IP Address (DHCP Client), PPPoE, PPTP, L2TP

Firewall

DoS Detection

NAT Firewall with SPI mode

Virtual Server

DMZ

Schedule-Based Application and URL Filtering

Access Control

IP / MAC Address Filter

Domain Access Control

Other Features

DDNS Supported, UPnP Supported, VPN (PPTP, IPSec, L2TP) Pass-Through

Event Logging

Syslog supported, Email Alert

Configuration and Management

Setup Wizard

Web Based User Interface

Remote Management

SNMP

Firmware Upgrade

Web-Based (HTTP), Windows Utility

Operating Systems

Windows 2000/XP/Vista/Mac OSX/Linux

Power Adapter

DC9V / 1A

Operating Temperature

0°C ~ 40°C / 85% Humidity

Storage Temperature

-20°C ~ 70°C / 85% Humidity

Dimensions

160mm(L) * 115mm(W) * 30mm(H)


Certifications

CE, FCC

Standard Compliant

IEEE 802.3, IEEE 802.3u, IEEE 802.3x

Product Diagram

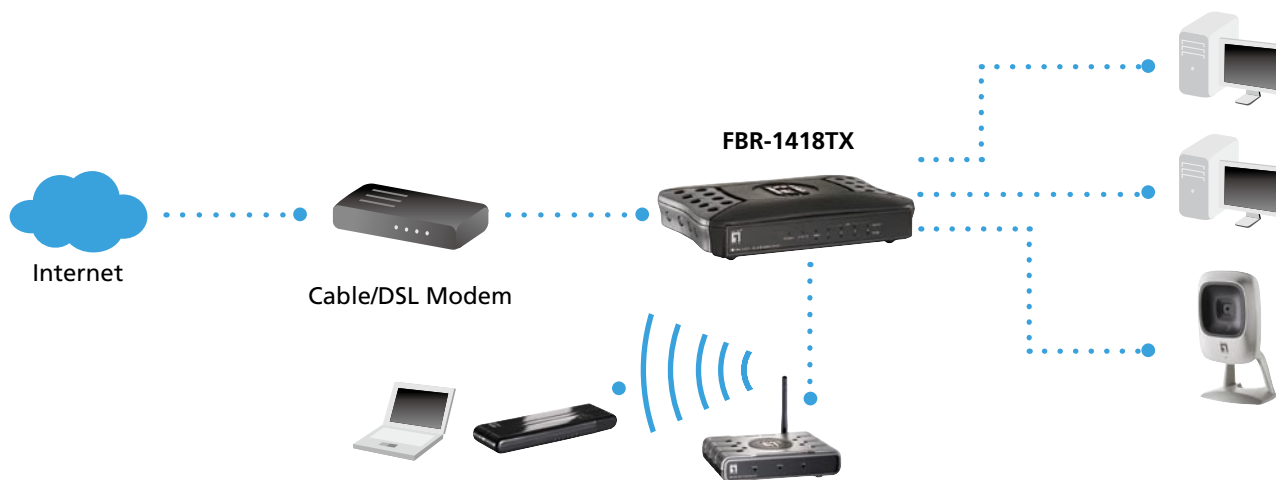

Order Information

FBR-1418TX: 1W, 4L Broadband Router

Package Content

FBR-1418TX
 RJ45 Ethernet LAN Cable
 Power Adapter
 Quick Installation Guide
 CD Manual