



## Broadband Router



FBR-1418TX

H/W Version: 3

### Product Overview

The LevelOne FBR-1418TX is a high-performance Broadband Router with an integrated 4-port switch. Up to 4 workstations can connect to this router via 4 10/100 Ethernet ports that support solid throughput and Auto-Crossover cable detection function. The FBR-1418 supports multiple WAN connection methods such as static IP addresses, dynamic IP addresses, PPPoE, L2TP and PPTP connections.

### Security

For elevated security, FBR-1418TX supports NAT firewall with SPI mode to protect the network against DoS attacks and also features VPN pass-through by IPSec, PPTP, L2TP to prevent unwanted access to data transfers.

### Easy Configuration

System configuration, maintenance and firmware upgrades are easy through FBR-1418TX's web-based management feature. By using any web browser, the wizard walks you through the whole configuration process step-by-step.

The interface also allow users to configure all advanced setting of the FBR-1418TX, including making access restrictions, setting administration/user passwords, and creating system logs.



1. LED Indicators
2. LAN Interface
3. WAN Interface
4. Power Socket
5. Reset Button

### Key Features

- Integrate with 4-Port 10/100Mbps Fast Ethernet Switch with MDI/MDIX auto-sensing
- Provide 10/100Mbps WAN interface to connect with DSL/Cable modem for broadband Internet access
- Built-in NAT function: allows multiple PCs to share one Internet connection
- Browser-based interface for easy configuration and management
- Built-in firewall to protect your Intranet
- Support VPN pass-through of PPTP, L2TP, and IPSec.
- Easy to upgrade via Web or Windows Application

### Works Well With



**FCS-0010**  
10/100 Mbps Network Camera



**FNS-1020**  
1-Bay Simple Network Storage

## Technical Specification

### Standards Compliant

IEEE 802.3, IEEE 802.3u, IEEE 802.3x

### LAN Interface

4 x 10/100 Mbps Auto-MDIX RJ45 ports

### WAN Interface and Standards

1 x 10/100 Mbps Auto-MDIX RJ45 ports

Static-IP Address, Dynamic IP Address (DHCP Client), PPPoE, PPTP, L2TP

### Firewall

DoS Detection

NAT Firewall with SPI mode

Virtual Server

DMZ

Schedule-Based Application and URL Filtering

### Access Control

IP / MAC Address Filter

Domain Access Control

### Other Features

DDNS Supported, UPnP Supported, VPN (PPTP, IPSec, L2TP)

Pass-Through

### Event Logging

Syslog supported, Email Alert

### Configuration and Management

Setup Wizard

Web Based User Interface

Remote Management

SNMP

### Firmware Upgrade

Web-Based (HTTP), Windows Utility

### Operating Systems

Windows 2000/ XP / Vista / 7; Mac OSX; Linux

### Power Adapter

5V DC/ 1~1.2A

### Operating Temperature

0°C ~ 40°C / 85% Humidity

### Storage Temperature

-20°C ~ 70°C / 85% Humidity


### Dimensions (L x W x H)

160mm x 115mm x 30mm

### Certifications

CE, FCC

## Product Diagram

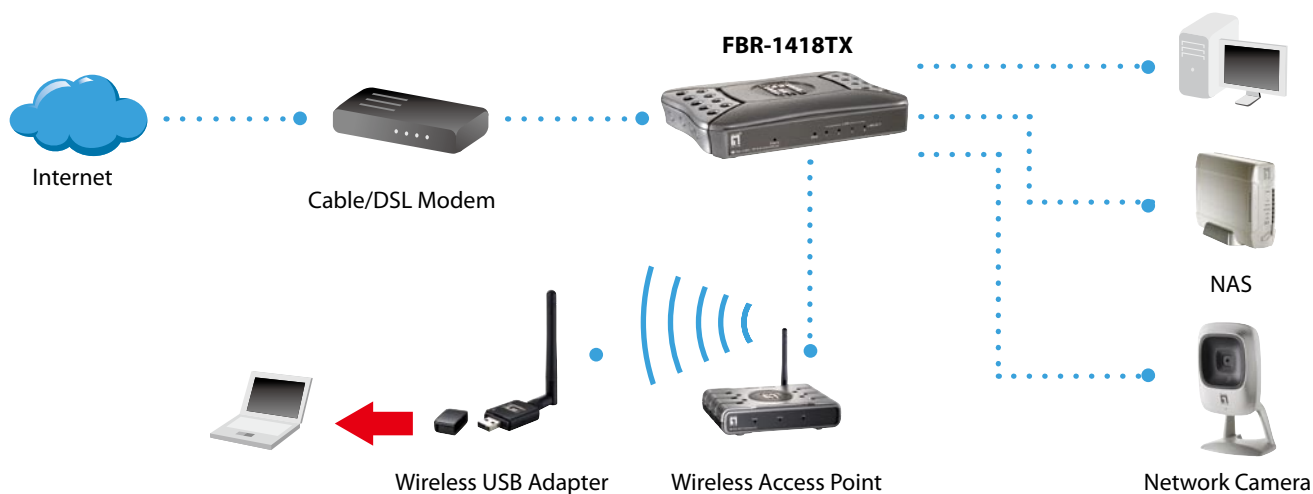

## Order Information

### Package Content

**FBR-1418TX:** Broadband Router

FBR-1418TX

Power Adapter

RJ-45 Ethernet LAN Cable

Quick Installation Guide

CD Manual