



# 4-Port USB KVM Switch w/ Audio



KVM-0421

H/W Version: 1

### Product Overview

The KVM-0421 4-Port USB KVM Switch with Audio from LevelOne offers users with an easy to install KVM switch that can manage four computers from a single monitor, keyboard and mouse. With audio support, users can connect a single set of speakers directly to the KVM switch and enjoy listening to music and watching movies from any computer.

### Flexible Multimedia Feature


Users are now offered with flexible multimedia support. The KVM-0421 offers users with user-programmable simultaneous or independent PC and audio switching. This enables users to listen to music from one computer while simultaneously using the other computers for work or fun.

The KVM-0421 supports PC and Macintosh (MAC G3, G4, iMAC) platforms.

### Easy to Switch between Computers

The KVM-0421 switches between computers either through the pushbuttons located on the switch or by using keyboard hot keys. The KVM switch includes a Windows® and Mac based utility allowing users to select and monitor active PCs from their desktop as well as to configure the keyboard hotkeys for easy switching between computers.

The KVM-0421 further supports hot-plugging for easy maintenance of computers without shutting down the KVM switch or the computer. The LED display offers

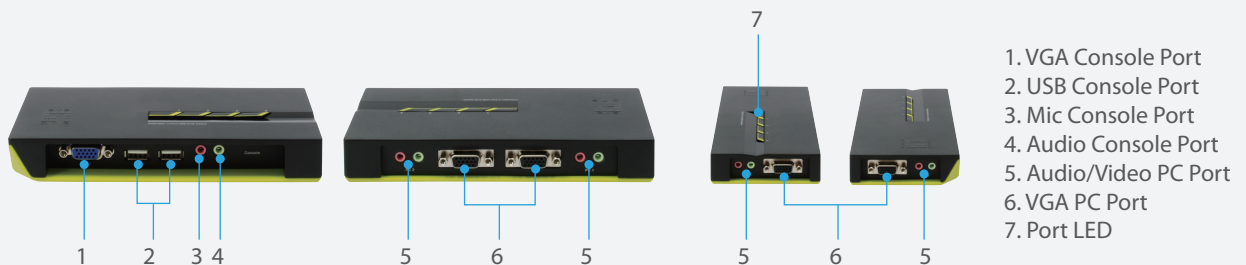

### Key Features

- Flexible switching for an uninterrupted multi-media experience across multi-platforms
- Control and manage four computers using a single USB keyboard and mouse and monitor
- Simultaneous and independent PC and Audio user-programmable switching
- High 2048 x 1536 pixels VGA resolution
- USB interface power supply
- At-a-glance LED display for easy monitoring of PC activity
- True Plug-and-Play operation without any software installation or power supply
- Windows-based switching software utility included

### Related Products



**KVM-0221**  
2-Port USB KVM Switch w/ Audio



**KVM-0222**  
2-Port USB KVM Switch

## Technical Specification

### Console Port:

Keyboard: USB x 1

Mouse: USB x 1

Video: HDB 15-pin (Female)

Audio Input/ Output: 3.5mm jack x 1

Mic Input/ Output: 3.5mm Mic jack x 1

### PC Port:

USB x 4

HDB 15-pin Female x 4

Audio / Mic Connector x 8

### Monitor Supported:

VGA / SVGA / QXGA / WUXGA

### LEDs:

4 LEDs

### PC Selection:

Push Button / Hot Key / Auto Switching

### Power:

USB Interface Power

### Microphone Supported:

V

### Cables:

USB KVM Combo Cable Sets (1.8m) x 4

Audio / Mic Cables x 2

### Max. Resolution:

2048 x 1536

### Scanning Interval:

10,15,20,25,30,35,40,45,50,55,60 Seconds

### Operating Temp.:

0~50°C

Storage Temp:

-20~60°C

Humidity:

0~80 % RH Non-Condensing

Enclosure:

High-impact Plastic

Weight (g):

116


Dimensions (L x W x H):

164mm x 72mm x 26mm

OS Supported:

Win & Mac

## Product Diagram

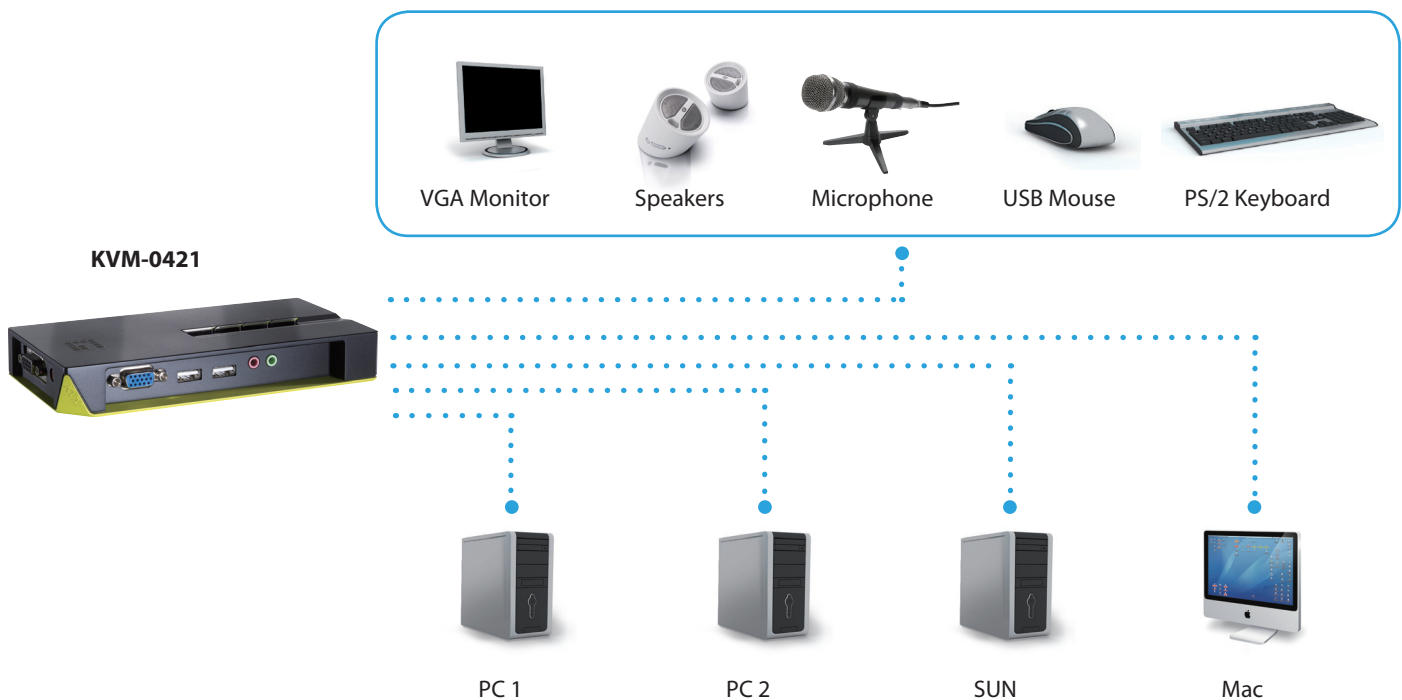

## Order Information

**KVM-0421:** 4-Port USB KVM Switch with Audio

## Package Content

KVM-0421, KVM cable sets, CD Manual, Quick Installation Guide