

level®  
one  
**POS-4001**

**Outdoor High Power PoE Splitter 12V**  
**User Manual**



POS-4001 is an outdoor high power PoE Splitter 12V for use in Power over Ethernet systems. With Ethernet Input (data + power) port and Output (data only) port, POS-4001 may split power from existing LAN cable and convert up to 12VDC/2.5A for power hungry applications such as Wireless APs, Security cameras and IP Phones. The internal current limit, short-circuit and overload protection are implemented to provide up to 12VDC/2.5A for use of DC output power.

POS-4001 can work in pair with POI-4000, a high power PoE Injector, to deliver up to 12VDC/2.5A for use of high power devices. POS-4001 itself is powered by POI-4000 and so requires no separate power connection in the middle of the cable, making it extremely easy to connect and power IP cameras.

The POS-4001 is compliant to IP-66 weather proof from snow, rain, typhoons, desert heat, etc. this Outdoor PoE Splitter POS-4001 is up to the challenge for deployment in any harsh weather condition.

## **Advantages:**

- 12VDC 2.5A High Power PoE Power Splitter
- Split Power Over Ethernet (POE) to remote devices
- DC OUTPUT: 12VDC (default), 9, 6, 5, 3.3VDC(Optional)
- Ethernet 100Mbps Wire Speed
- Simple to install – Plug & Play
- IP66 weatherproof design

## **Technical Specifications:**

### LAN Interface:

- IEEE 802.3x, Auto-Detection for 10/100BaseT and full/half duplex
- Standard Straight-through, or Cross-over CAT 5 cable
- Automatic MDIX function
- RJ-45 Connector x 2
- 

### POWER:

- OUTPUT: DC12V/2.5A at full load
- 

### Regulations & Approvals:

- FCC Rules Part 15 Class A
- CE

### Physical Dimension:


WxDxH: 180 x 165 x 95 (mm)

### Operating Environment:

- Humidity: 5% to 90% non-condensing
- Temperature: 0 ~ 50 degree C

## Application Diagram:

### POI-4000 PoE Injector & POS-4001 Outdoor PoE Splitter

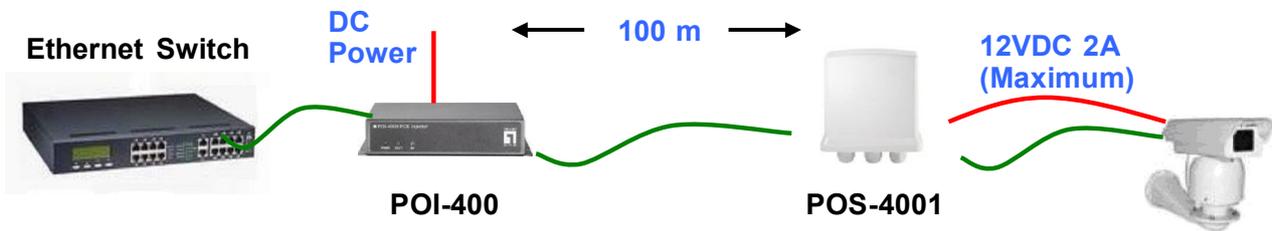

## RJ-45 CONNECTOR & PINOUT

Pin	RJ-45 Input (Data + Power)		RJ-45 Output (Data Only)	
	Symbol	Description	Symbol	Description
1	Rx+	Data Receive	Rx+	Data Receive
2	Rx-	Data Receive	Rx-	Data Receive
3	Tx+	Data Transmit	Tx+	Data Transmit
4	-Vdc_return(+)	Feeding power(+)	NC	Not Connected
5	-Vdc_return(+)	Feeding power(+)	NC	Not Connected
6	Tx-	Data Transmit	Tx-	Data Transmit
7	-Vdc	Feeding power(-)	NC	Not Connected
8	-Vdc	Feeding power(-)	NC	Not Connected