

# FCS-1131

## Prime HDR Box IP Camera

Equipped with industrial-grade streaming compression technology, the Prime HDR Box IP Camera offers supreme image quality while keeping efficient and valuable network bandwidth for storage management.


Possessing line-by-line HDR technology, camera can also have premium performance under extreme low light contrast scenario or fluctuate lighting environment.

Furthermore, with smart event function, alarm / motion can be categorized by event types, which makes event management much easier. The camera offers strengthened support for surveillance application that demands consistent precision focus control while high resolution and superior video quality are requisite.

In addition, considering that precise focus adjustment can be difficult during installation, the auto back focus mechanism is designed to allow simple control with just one click.

### Key Features

- Multiple Progressive Scan CMOS Sensor Support 4M Resolution
- Multi-exposure HDR
- Low Latency Live Streaming
- Low Power Consumption on Encoding
- Quad codec support (H.264 Baseline / Main Profile / High Profile / MJPEG)
- Quad Streams Support
- Smart Event Function
  - Audio Detection / Motion Detection / Network Failure Detection / Tampering Alarm
- Text Overlay and Privacy Masks
- 3D Motion Compensated Noise Reduction (MCTF)
- BNC analog output
- 64GB SDXC SD Card support
- ONVIF Profile S Support
- RS 485 Support

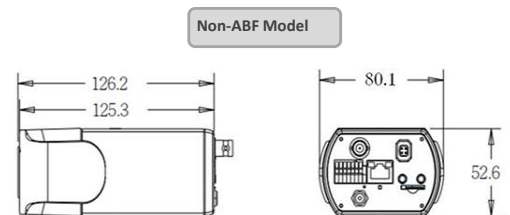

# FCS-1131 - Prime HDR Box IP Camera

Camera		FCS-1131	
Image Sensor		1/2.8" Sony Progressive CMOS	
Effective Pixels		2M (1920x1080)	
Minimum Illumination	Color	0.04 lux	
	B/W	0.002 lux	
Shutter Speed			
S/N Ratio			
Operation		FCS-1131	
Multiple Languages		English / French / German / Italian / Japanese / Korean / Portuguese / Russian / Simplified Chinese / Spanish / Traditional Chinese	
Image Setting	Iris Control	P-iris	
	Backlight Compensation	On / Off	
	White Balance	AWB / ATW / Manual / One Push	
	Noise Reduction	3DNR / 2DNR / ColorNR	
	Wide Dynamic Range	Shutter WDR On/Off (120dB)	
	Privacy Mask	On / Off	
	Privacy Mask Type	Black	
	Brightness	Manual	
	Exposure	Auto / Manual	
	Sharpness	Manual	
	Contrast	Manual	
	Saturation	Manual	
	Hue	Manual	
Digital Zoom	Support		
Event Setting	Audio Detection	On / Off	
	Motion Detection	On / Off / By Schedule	
	Network Failure Detection	By Schedule / On / Off	
	Tampering Alarm	On / Off / By Schedule	
Audio	Two-way Audio	Line in / Line out	
	Compression	G.711 / G.726 / AAC / LPCM	
Network		FCS-1131	
Interface		RJ-45, 10/100 Mbps Ethernet	
Video Compression		H.264 (MPEG-4 Part 10/AVC) / MJPEG	
Video Streaming	Dual Streams	Normal Mode	H.264 1080P @25/30 fps + H.264 SXGA @25/30 fps
		HDR Mode	H.264 1080P @25/30 fps + H.264 SVGA @25/30 fps
	Quad Streams	Normal Mode	H.264 1080p@25/30 fps + H.264 720p @25/30 fps + H.264 D1 @25/30 fps + H.264 cif @25/30 fps
		HDR Mode	1080p(30/25 fps) + cif(30/25 fps) + cif(30/25 fps) + cif(30/25 fps)
Video Resolution	H.264	Full HD 1080P / SXGA / 720P / XGA / SVGA / D1 / VGA / CIF / QVGA	
	MJPEG	Full HD 1080P / SXGA / HD 720P / XGA / SVGA / D1 / VGA / CIF	
Protocol		ARP, IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS, ONVIF	
Security		HTTPS / IP Filter / IEEE 802.1X	
Alarm	Input		2 Set
			5V 10kΩ pull up
	Output		1 Set
Event Notification		Photo Relay Output 300V DC/AC	
Micro SD		HTTP / FTP / SMTP	
Supported Web Browser		microSDXC 64GB support	
User Account		Internet Explorer (7.0+) / Firefox / Safari	
		20	
Mechanical		FCS-1131	
Lens Mounting		CS Mount	
LED Indicator		Power / Link / ACT	
Connectors	Auto Iris	P-iris	
	Alarm	4 Pin Terminal Block, Pitch 3.5 mm	
	Power	3pin Terminal Block	
	Ethernet	RJ-45	
	Analog Video	1.0 Vp-p / 75 Ω, BNC	
	Audio	Built-in Microphone or Two-way Audio (Line in / Line out)*	
	RS-485	D+,D-	
General		FCS-1131	
Start-up Temperature		-15°C (5° F)	
Operating Temperature		-20°C ~ 55°C (-4° ~ 130° F)	
Humidity		10% ~ 90%, No Condensation	
Dimension		125 x 82 x 52 mm (L x W x H) w/o Lens	
Weight		330 g (0.73 lb)	
Power Source		PoE / DC 12V / DC 24V / AC 24V	
Power Consumption	Operation(802.3af) System	3W	
	Operation(802.3af) Others	ICR Switching: +0.5W/ ABF: +3.2W /SD:+0.6W	
Regulatory		CE / FCC / RoHS	

\* mark for optional items

LENS not include / CAS-1402

Product specification and availability are subject to change without notice.

