



## PoE PIR IP Dome Camera

FCS-3031

H/W Version: 1

### Product Overview

FCS-3031 is a Dome Type PoE Network Camera for consumer markets. This IP Camera comes with a high-quality progressive 1/4" CMOS sensor. It also streams real-time audio and video in MPEG4/MJPEG video compression formats over a PoE enabled LAN network or in 3GPP compression format for streaming over a 3G mobile network.

### Powerful, feature rich PoE IP Network Camera

Despite its compact size, FCS-3031 features fixed focus lens, two-way audio capability, and excellent video quality. IEEE 802.3af PoE compliant, users can install the camera without concerns about the power outlet located near the camera for easy deployment of a PoE enable LAN network.


### Passive InfraRed (PIR) Sensor

When people pass by or in an emergency situation, the built-in PIR motion detection sensor will "detect" and start recording automatically, which is able to detect movement up to 5 meters away.

When motion is detected at the specified regions, the additional function of alarm notification can send an E-mail alert or send captured images via FTP upload to a designated storage server.

### Bundled LevelOne IP CamSecure up to 64channels

The FCS-3031 comes bundled with the LevelOne IP CamSecure Surveillance Software. It allows users to monitor the cameras up to 64 channels simultaneously.



1. PIR Sensor
2. Lens
3. DC Power Jack
4. RJ-45 Ethernet Port
5. I/O Ports
6. Reset Button
7. 3.5mm Phone Jack

### Key Features

- High-quality Progressive 1/4" CMOS image sensor at VGA (640x480) resolution
- Provide MPEG4 Simple Profile and MJPEG video streams simultaneously (up to 30fps)
- Supports analog output (NTSC/PAL) for installation purpose
- Hardware 128-bit AES and 64-bit DES/3DES data encryption
- Supports dual directions voice (G.726 at 8K sampling rate and 16K bit rate) in full duplex
- Supports up to 10 viewers simultaneously
- Motion Detection by analyzing the video stream
- Supports HTTP streaming in MPEG4 and MJPEG video format
- Provide 1 additional 160x120 MPEG4 video stream for cell phone access (through RTP)
- Built-in PIR Sensor for Motion Detection

### Works Well With



**NVR-0204**  
4-CH Network Video Recorder



**WBR-6022**  
300Mbps HomeGuard 22  
Residential Gateway

## Technical Specification

### Hardware Specifications

#### System & Network

- CPU: Soc with Hardware MPEG-4 SP/MJPEG Encoders
- Flash ROM: 4 Mbytes
- SDRAM: 32 Mbytes
- LAN: Ethernet 10/100BaseT, Auto-MDIX,

#### Connectors

- Ethernet, RJ45 connector
- Microphone Input, Speaker Output, Analog Output, 3.5mm Phone Jack (Need a convert cable)
- Power Jack, 2.1mm Phone Jack
- Reset Button, Tack switch

#### I/O Ports (Dry Contact)

- Input Control x 1
- Output Control x 1
- Ground x2

#### Power Consumption

10W

#### Power Adapter

- External Power Adapter: 12V/1A, 90 degree, 2.5mm, 110~240 VAC/60Hz, Switching
- PoE: 48V/0.3A

#### PIR Sensor

- Sensitivity distance: 5 meters
- Angle degree: 75 degree (cone)
- Focus distance: 6~9 meters

#### Minimum Illumination

0.5 Lux

#### Optical

- Image Sensor: Progressive 1/4" CMOS sensor, VGA 640x480, Digital Interface
- Lens: F2.0 Fixed Focus lens, Effective Range: 50cm to infinity

#### Mechanism

- Dimension:  $\Phi$ 144mm x 145mm (subject to change)
- Weight: 430g

#### Environmental Conditions

- Working Environment
  - Temperature: 0°C ~ 40°C
  - Humidity: 10% ~ 80%
- Storage Environment
  - Temperature: -20°C ~ 70°C
  - Humidity: 0% ~ 90%

### Software Specifications

#### Operating System

- Web: Server, For View Video and Configuration
- E-Mail: Client, For event trigger alert notification
- DHCP: Client
- Management: Web Base, HTML, Utility Software (For Windows)
- Protocol Support: TCP/IP, HTTP, HTTPS, DHCP, NTP, SMTP, UPnP, FTP, RTP/RTSP

#### Video

- Video Compression: MPEG4 / MJPEG

#### Resolution

- 640x480 (VGA)
- 320x240 (QVGA, system default)
- 160x120 (QQVGA)

#### Video Controls

- Auto-White-Balance
- Auto- Exposure

#### Special Video Features

- Time Stamp
- Text Overlay, 20 characters

#### Browser Support

Internet Explorer 6 and above

#### ActiveX Support

ActiveX 8.0 and above

#### Audio

- Audio Compression: G.726, G.711 (a-law & u-law)
- Sampling Rate: 8 KHz
- Default Bit Rate: 16 Kbps

#### Alert


- Motion Detection: 4 Detection Areas with individual sensitivity
- I/O Ports: 1 Input and 1 Output ports for external device accessing
- PIR: The Human Detection in 5M range
- E-Mail Alert: 3 e-mail address
- FTP Uploading: 2 FTP servers address and login settings
- Instant Message: 1 Jabber client and 1 HTTP notification for IM notification

#### Bundle Software

Bundled with 64-Channel LevelOne IP CamSecure surveillance management software

p.s., The audio upload (for speaker out) only supports G.726 compression method.

## Product Diagram

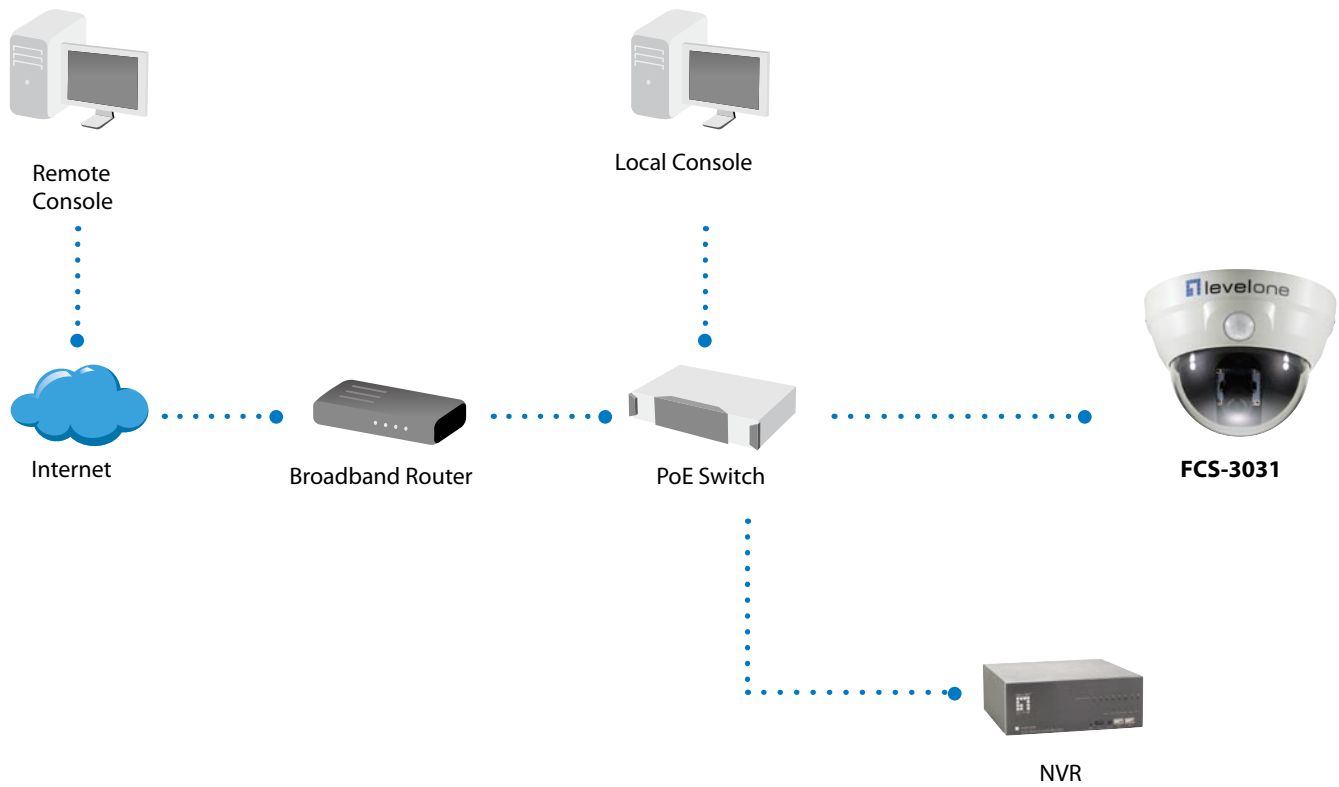

## Order Information

### Package Content

#### **FCS-3031:** PoE PIR IP Dome Camera

FCS-3031

Power Adapter

CD Manual/Utility

Quick Installation Guide

Allen Wrench

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.

© Copyright Digital Data Communications GmbH. All Rights Reserved.