



IES-2881

24 100FX SFP + 4 GE Combo SFP Managed Switch -40 to 75C

Overview

LevelOne IES-2881 Industry Ethernet Switch provides 24 100Base-FX SFP slots plus 4 port Gigabit Combo SFP to enable high speed network at mission-critical environment. With the 1U height rack-mountable size, this switch can be easily installed in the cabinet, plus the clearly visible status LEDs provide simple monitoring of port link activity. Moreover, the SFP slots support pluggable modules that enabling you to choose from a variety of transceivers.

Resilient Ring Network

Supports Ring topology network providing simple installation and ultra fast network recovery performance, less than 15ms. Unlike much complex resilient topology, such as a redundant star, the Ring simplifies the network design and requires less cabling installation. In addition, fast network recovery time helps minimize system downtime.

High Reliability

All components are built to withstand harsh environment applications without compromise where humidity, temperature variation and even shock vibration are concerns, including Electric & Utility, Critical Infrastructure, Transportation and Surveillance Security. This device operates under -40 to 75 Celsius (-40 to 167 Fahrenheit) temperature.

Management


IES-2881 supports a variety of management features including: CLI via Console or Telnet; Graphic User Interface via Web Browser or Simple Network Management Protocol via SNMP tools. It provides better visibility and management of those critical assets.

Features

- Complies with NEMA TS2 Environmental requirements for Traffic control equipment
- Supports a-ring and RSTP/MSTP/STP for Ethernet redundancy
- IP Multicast Filtering through IGMP Snooping V1, V2 & V3
- Supports port-based VLAN and IEEE802.1Q VLAN Tagging and GVRP
- IEEE802.1p QoS with four priority queues
- MAC-based trunking and LACP
- IEEE802.1x Security
- Bandwidth Rate Control
- Per-port programmable MAC address locking
- Up to 24 Static Secure MAC addresses per port
- Port mirroring
- NTP synchronization
- DHCP Client/Server
- RS-232 console, Telnet, SNMP V1, V2c & V3, RMON, Web Browser, and TFTP Management
- 1000Mbps-Full-duplex, 10/100Mbps-Full/Half-duplex, Auto-Negotiation, Auto-MDI/MDIX
- Full wire-speed forwarding rate
- -40°C to 75°C (-40°F to 167°F) operating temperature range, tested for functional operation @ -40°C to 85°C (-40°F to 185°F)

Diagrams

Unit: mm

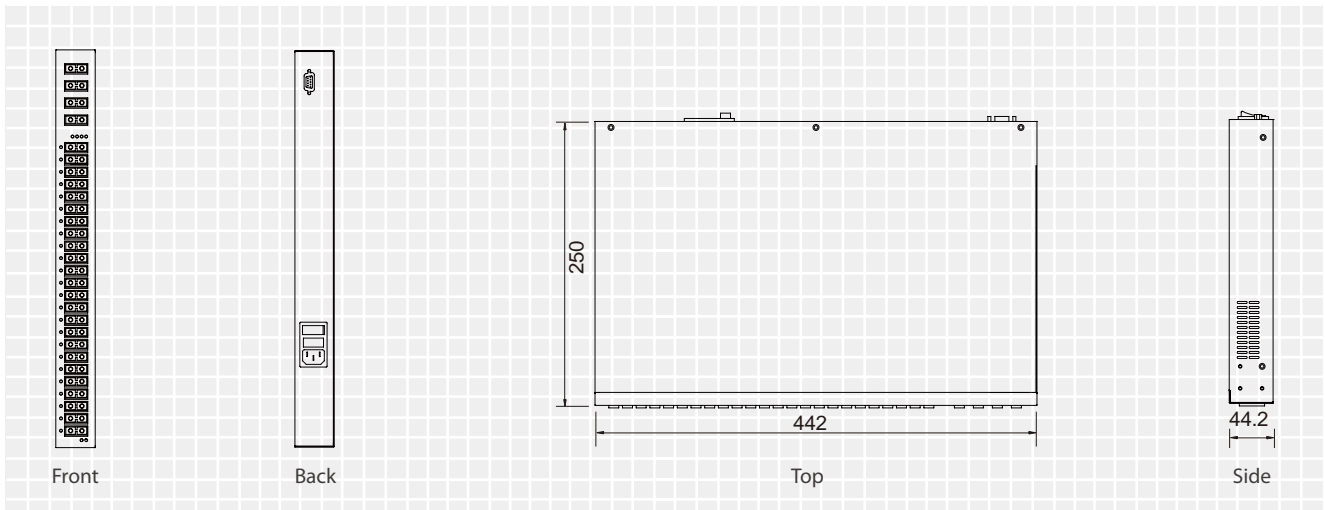

Specifications

Technology	
Standards	<ul style="list-style-type: none"> IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX/100BASE-FX, IEEE802.3ab 1000BASE-T, IEEE802.3z 1000BASE-SX/1000BASE-LX, IEEE802.3x, IEEE802.1p, IEEE802.1Q, IEEE802.1w, IEEE802.1x
Forward and Filtering Rate	<ul style="list-style-type: none"> 14,880pps for 10Mbps 148,810pps for 100Mbps 1,488,100pps for 1000Mbps
Packet Buffer Memory	<ul style="list-style-type: none"> 3M bits
Processing Type	<ul style="list-style-type: none"> Store-and-Forward Half-duplex back-pressure and IEEE802.3x full-duplex flow control
Address Table Size	<ul style="list-style-type: none"> 8192 MAC addresses

Power	
Input	<ul style="list-style-type: none"> (T) : + / - 48VDC (36 - 75VDC) Internal Universal PSU (W) : 88 - 370VDC and 90 - 264VAC Internal Universal PSU (C) : 90 - 264VAC, 50 - 60Hz Internal Universal PSU
Power Consumption	<ul style="list-style-type: none"> 42.7W Max.
Overload Current Protection	<ul style="list-style-type: none"> Present

Mechanical	
Casing	<ul style="list-style-type: none"> Metal case IP30
Dimensions	<ul style="list-style-type: none"> Single Power: 442mm (W) x 284mm (D) x 44.2mm (H) (17.4" (W) x 11.1" (D) x 1.74" (H)) Redundant Power: 442mm (W) x 375mm (D) x 44.2mm (H) (17.4" (W) x 14.7" (D) x 1.74" (H))
Weight	<ul style="list-style-type: none"> Single Power: 5.1Kg (11.2lbs.) Redundant Power: 6.2Kg (13.7lbs.)
Installation	Rack Mounting

Interface	
Ethernet Port	10/100BASE-TX: 24, 16, 8 or 0 port 100BASE-FX: 0, 4, 8, 12, 16, 20 or 24 ports Gigabit: 0, 2 or 4 ports
Console Port	Port: One DB9 RS-232 port
LED Indicators	Per Unit: Power Status Per Port: 10/100TX, 100FX: Link/Activity (Green) 10/100/1000TX, 1000SX/LX: Link/Activity (Green) SFP Selected: Selected/Unselected (Green)

Environment	
Operating Temperature	<ul style="list-style-type: none"> -40°C to 75°C (-40°F to 167°F) Tested @ -40°C to 85°C (-40°F to 185°F)
Storage Temperature	<ul style="list-style-type: none"> -45°C to 85°C (-49°F to 185°F)
Ambient Relative Humidity	<ul style="list-style-type: none"> 5% to 95% (non-condensing)
MTBF	<ul style="list-style-type: none"> 15.54 years

Regulatory Approvals	
ISO	<ul style="list-style-type: none"> Manufactured in an ISO9001 facility
EMI	<ul style="list-style-type: none"> FCC Part 15, Class A EN61000-6-4 <ul style="list-style-type: none"> EN55022, N61000-3-2, EN61000-3-3
EMS	<ul style="list-style-type: none"> EN61000-6-2 <ul style="list-style-type: none"> EN61000-4-2 (ESD Standards) Contact: + / - 8KV Air: + / - 15KV EN61000-4-3 (Radiated RFI Standards) 35V/m, 80 to 3G; 80% AM EN61000-4-4 (Burst Standards) Signal Ports: + / - 4KV A.C. Power Ports: + / - 4KV EN61000-4-5 (Surge Standards) Signal Ports: + / - 4KV; Line-to-Earth A.C. Power Ports: + / - 4KV; Line-to-Earth D.C. Power Ports: +/-4KV; Line-to-Earth EN61000-4-6 (Induced RFI Standards) Signal Ports: 10Vrms @ 0.15 - 80MHz; 80% AM A.C. Power Ports: 10Vrms @ 0.15 - 80MHz; 80% AM EN61000-4-8 (Magnetic Field Standards) 1000A/m @ 50, 60Hz IEC61000-4-10 (Oscillatory wave magnetic field test) 100kHz and 1MHz: 30A/m IEC61000-4-16 (Power frequency immunity test) 50Hz: 300V IEC61000-4-18 (Oscillatory wave immunity test): 100 kHz, 2.5kV CM and 2.5kV DM 1MHz, 2.5kV CM and 2.5kV DM IEEE1613: power frequency withstand voltage: 2KV, Insulation resistance >550 MOhm RJ45 Port 500V, Insulation resistance >550 MOhm Impulse voltage: 5Kv, Insulation resistance >550 MOhm IEC60870-2-1: AC/DC power supply voltage variations
Environmental Test Compliance	<ul style="list-style-type: none"> IEC60068-2-6 Fc (Vibration Resistance) 1g @ 10 - 150Hz, Amplitude 0.35mm (Operation/Storage/Transport) IEC60068-2-27 Ea (Shock) 25g @ 11ms (Half-Sine Shock Pulse; Operation) 50g @ 11ms (Half-Sine Shock Pulse; Storage/Transport) IEC60068-2-32 Ed (Free Fall) 1M (3.281ft.)

Order Information

IES-2881 - 24 100FX SFP + 4 GE Combo SFP Managed Switch -40 to 75C

Package Contents

IES-2881

CD Manual / Utility

Quick Installation Guide

Optional Accessories

- Gigabit

- SFP-4200 - 1.25G MMF SFP Transceiver (550m, 850nm, -20 to 85C)
- SFP-4210 - 1.25G SMF SFP Transceiver (10km, 1310nm, -40 to 85C)
- SFP-4240 - 1.25G SMF SFP Transceiver (40km, 1310nm, -40 to 85C)
- SFP-4270 - 1.25G SMF SFP Transceiver (70km, 1550nm, -40 to 85C)
- SFP-4310 - 1.25G BIDI SMF SFP Transceiver (10km, 1310nm, -40 to 85C)
- SFP-4320 - 1.25G BIDI SMF SFP Transceiver (10km, 1550nm, -40 to 85C)
- SFP-4330 - 1.25G BIDI SMF SFP Transceiver (20km, 1310nm, -40 to 85C)
- SFP-4340 - 1.25G BIDI SMF SFP Transceiver (20km, 1550nm, -40 to 85C)
- SFP-4350 - 1.25G BIDI SMF SFP Transceiver (40km, 1310nm, -40 to 85C)
- SFP-4360 - 1.25G BIDI SMF SFP Transceiver (40km, 1550nm, -40 to 85C)
- SFP-4370 - 1.25G BIDI SMF SFP Transceiver (60km, 1310nm, -40 to 85C)
- SFP-4380 - 1.25G BIDI SMF SFP Transceiver (60km, 1550nm, -40 to 85C)

- Fast Ethernet

- SFP-2100 - 155M MMF SFP Transceiver (2km, 850nm, -20 to 85C)
- SFP-2200 - 155M MMF SFP Transceiver (2km, 1310nm, -40 to 85C)
- SFP-2230 - 155M SMF SFP Transceiver (30km, 1310nm, -40 to 85C)
- SFP-2260 - 155M SMF SFP Transceiver (60km, 1310nm, -40 to 85C)
- SFP-2280 - 155M SMF SFP Transceiver (80km, 1310nm, -40 to 85C)
- SFP-2300 - 155M SMF SFP Transceiver (20km, 1550nm, -40 to 85C)
- SFP-2310 - 155M SMF SFP Transceiver (100km, 1550nm, -40 to 85C)
- SFP-2320 - 155M SMF SFP Transceiver (120km, 1550nm, -40 to 85C)