



## 2-Port USB KVM Switch



KVM-0222

H/W Version: 1

### Product Overview

The KVM-0222 2-Port USB KVM Switch from LevelOne offers users with an easy to install KVM switch that can manage two computers from a single monitor, keyboard and mouse.

It allows users to access, control, boot and reboot two USB-enabled computers using a single USB keyboard, mouse and monitor.

### Flexible Multimedia Feature

The KVM-0222 offers users with user-programmable simultaneous or independent PC switching. This enables users to work on one computer while simultaneously using the other computer for work or fun.

The KVM-0222 supports PC and Macintosh (MAC G3, G4, iMAC) platforms.


### One Keyboard, Mouse and Monitor for Two Computers

The LevelOne KVM-0222 connects two computer systems to a single USB keyboard, USB mouse and monitor.

The KVM-0222 is a Plug-and-Play KVM switch that requires no power supply. Users simply connect the KVM switch to the USB mouse and keyboard and screen ports on each computer using the included cables.



1 2



3



4 5

1. USB Console Port
2. USB Console Port
3. VGA PC Port
4. VGA Console Port
5. Port LED

### Key Features

- Flexible switching for an uninterrupted multimedia experience across multi-platforms
- Control and manage two computers using a single USB keyboard and mouse and monitor
- Simultaneous and independent PC user-programmable switching
- High 2048 x 1536 pixels VGA resolution
- USB interface power supply
- Easy switching between computers with keyboard hotkeys push button and Software selection
- At-a-glance LED display for easy monitoring of PC activity
- True Plug-and-Play operation without any software installation or power supply
- Windows-based switching software utility included

### Related Products



**KVM-0422**  
4-Port USB KVM Switch



**KVM-0212**  
2-Port PS/2 KVM Switch

## Technical Specification

### Console Port:

Keyboard: USB x 1  
 Mouse: USB x 1  
 Video: HDB 15-pin (Female)  
 Audio Input/ Output: -  
 Mic Input/ Output: -

### PC Port:

2 x HDB 15-pin Female  
 (VGA port with intergrated USB interface)

### Monitor Supported:

VGA / SVGA / QXGA / WUXGA

### LEDs:

2 LEDs

### PC Selection:

Push Button / Hot Key / Auto Switching

### Power:

USB Interface Power

### Microphone Supported:

-

### Cables:

USB KVM Combo Cable Sets (1.8m) x 2

### Max. Resolution:

2048 x 1536

### Scanning Interval:

10,15,20,25,30,35,40,45,50,55,60 Seconds

### Operating Temp.:

0~50°C

Storage Temp:

-20~60°C

Humidity:

0~80 % RH Non-Condensing

Enclosure:

High-impact Plastic

Weight (g):

109


Dimensions (L x W x H):

96mm x 61mm x 24mm

OS Supported:

Win & Mac

## Product Diagram

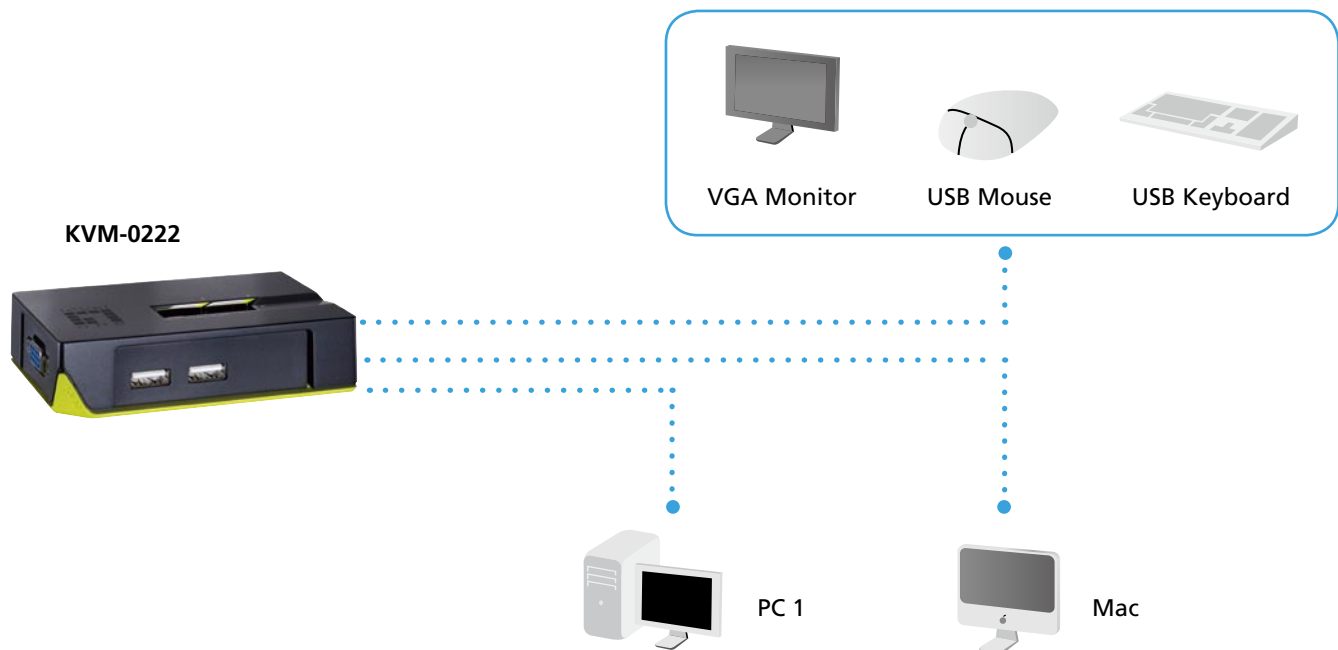

## Order Information

**KVM-0222:** 2-Port USB KVM Switch

## Package Content

KVM-0222  
 KVM cable sets  
 CD Manual  
 Quick Installation Guide