



How to Configure VOI-9200 to Register to FWD?

Register for a FreeWorld DialUp Account

1. Logon to <http://www.freeworlddialup.com> , upper right click "Get FWD" and register for a free account.
2. After registration, you will receive a phone number (should be 6 digits long).

The screenshot shows the FWD website homepage. At the top left, it says "Welcome to FWD!". Below that, there's a navigation bar with "FWD : Welcome to FWD!". The main content area features a large image of a woman talking on a phone, with the text "FWD lets you make free calls over the Internet." to its right. Below the image, there are five bullet points: "no cost.", "no spam.", "no gimmicks.", "no limits.", and "no kidding.". To the right of these bullet points, there's a paragraph explaining that FWD allows users to make real, free phone calls using their favorite telephone, computer, or PDA and any broadband connection. At the bottom of this section, there's a large blue button that says "DOWNLOAD IT NOW! USE IT TODAY!". On the right side of the page, there are several promotional boxes: "Get FWD!", "BLENDING: VoIP, IM, Presence & Social Networking...", "The Home of Virtual Phone Numbers™", and "GRANDSTREAM BudgeTone 101 Get it Now!". At the bottom left, there's a "Von Spring 2005" logo, and at the bottom right, there's a small text snippet: "You can start today at no cost, by either using programs".

Configure the FWD account into VOI-9200

Before connecting VOI-9200 to any ITSP service, you will need to configure your

1. WAN to have internet access first.
 2. Configure your IP Phone.
 3. Extension number.
 4. IVR if you need the function.
-
1. Please configure the setting as below. Note the SIP proxy and SIP registrar are necessary and Auth. name and password.
 2. Once finished, scroll down and click on “add”.

The screenshot displays the web interface for the VOI-9200 IP PBX Gateway. The left sidebar shows a navigation tree with categories like DHCP Service, IP PBX Service, User Management, Device, Route Management, Trunk, and Feature. The main content area is titled "SIP TRUNK MANAGEMENT" and contains a form for configuring a SIP trunk. The form fields are as follows:


SIP TRUNK MANAGEMENT	
Trunk Identifier	529652
Description	FWD Number
<input type="checkbox"/> Dynamic Peer	SIP Proxy: fwd.pulver.com
Auth. Name	529652
Auth. Password	••••••
<input checked="" type="checkbox"/> Registration Required	SIP Proxy Port: 5060
Outbound Routegroup	RG_DEF
DID of Extension	
DID Prefix	
DID Stripping	
Language	English
SIP Registrar	fwd.pulver.com
SIP Registrar Port	5060

Status:

3. Click on “more” you should be able to see the detail setting.



4. Do not forget to click on “Reload” for the setting to take effect.

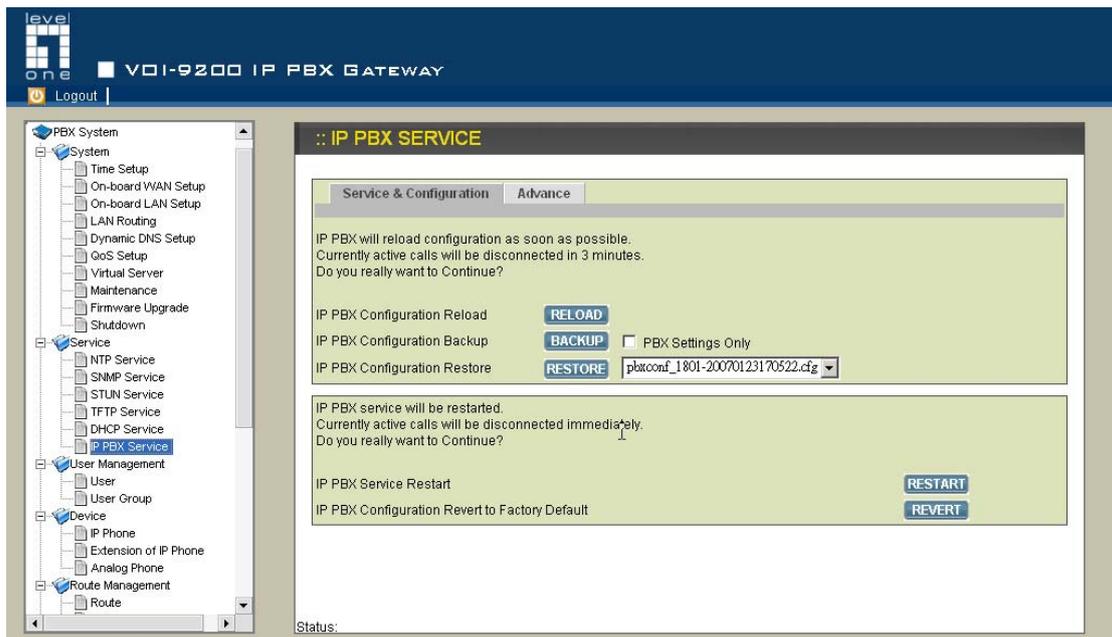

You can make a call to 529652 from any FWD number, you will hear the voice prompt of VOI-9200, dial the extension number to reach the person you want to speak to.