

8-Port Fast Ethernet Switch



FEU-0810

H/W Version: 1

Product Overview

The LevelOne FEU-0810 is a 10/100Mbps NWay Unmanaged Switch with outstanding performance and high efficiency. With 8 NWay auto-negotiation ports, this switch fulfills the needs of connecting users on a network with automatic selection of best network speed and duplex mode.

Power Saving Features


The FEU-0810 supports Green Ethernet to provide power–saving benefits without compromising performance. One way is to automatically detecting the length of connected cables and to adjust power usage by saving energy on shorter cable connections.

Get Optimal Bandwidth for Media Traffics through VIP Ports

The FEU-0810 is designed with three port-based QoS ports which provide considerably enhanced bandwidth quality. Users on the three QoS ports can experience better performance for internet surfing, online gaming and multimedia streaming through prioritized bandwidth settings.

Easy to Use

The FEU-0810 is plug-and-play and supports all kind of network protocols to make installation and network management easy and fast. LED indicators provide a quick and easy way to read port and switch information.

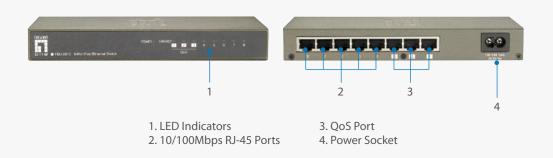

Key Features

- 8 x 10/100Mbps RJ-45 NWay Ports
- Supports NWay protocol for speed (10/100Mbps) and duplex mode (half/full) detection
- Supports MDI/MDI-X auto crossover and support full/half duplex operation on all ports
- Supports back-pressure (half duplex) and flow control (IEEE 802.3x)
- Wire-speed packet filtering and forwarding rate
- Store-and-forward architecture filters fragment & CRC error packets
- Desktop size design for easy deployment
- Metal casing with internal power supply
- Support three Port-based QoS (Quality of Service) ports

Works Well With



| **FNS-1020** | 1-Bay Simple Network Storage



FBR-1161 ADSL2+ Modem Router

Technical Specifications

Standard

IEEE802.3 (10BASE-T) IEEE802.3u(100BASE-T) IEEE802.3x Flow Control

Interface

8 x 10/100Mbps NWay RJ45 ports

NWay Protocol Support

Network speed: 10/100 Mbps Duplex mode: Full and Half

MAC Address Table

1K

Buffer Memory

96KB

Filtering/Forwarding Rate

10Mbps: 14,880pps/14,880pps 100Mbps: 148,800pps/148,800pps

LED indicators

System: Power Port: Link/Act

Power Supply

Internal power 100~240V AC, 50~60 Hz

Operating Temperature

0°-40°C (32°-104°F)

Operating Humidity

10% ~ 90% (non-condensing)

Dimensions (L x W x H)

194 x 85 x 26mm


Case Material

Metal

Emission

FCC/CE/VCCI Class B

Product Diagram

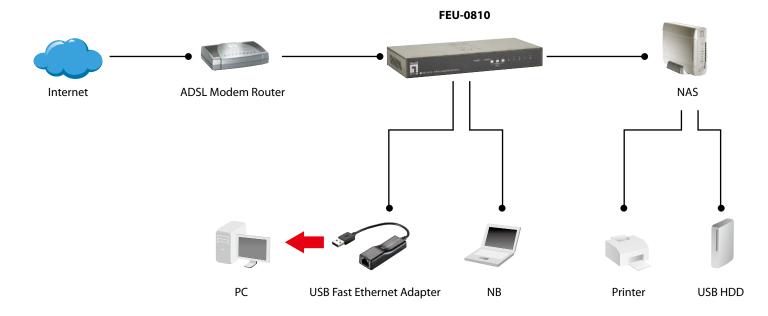

Order Information

FEU-0810: 8-Port Fast Ethernet Switch

Package Contents

FEU-0810

Power Cord

Rubber Feet x 4

QIG Manual