



Print Server with 1 USB Port



FPS-1032

H/W Version: 1

The LevelOne FPS-1032 print server is an ideal network printing solution for small offices, home offices, schools and other businesses that require printer sharing over the same network.


Multi OS and Network Printing Protocol Support

Network Protocol supported includes TCP/IP, IPX, NetBEUI, AppleTalk, LPR and SMB over TCP/IP for flexible use with different network clients connected to the same office network. The FPS-1032 also includes Internet Printing Protocol (IPP) support and Windows

Print Monitor Technology to monitor printing jobs received.

Easy Installation Wizard

The LevelOne FPS-1032 is easily configurable using a Web Browser or Windows based configuration program included with the CD-ROM. The print server is easily managed through a Web based user interface and the firmware is upgradeable through TFTP, the windows set-up program or the Web based user interface.

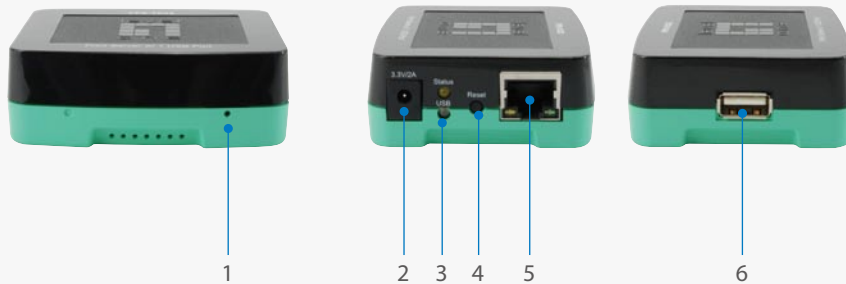

- 1. Reset Port
- 2. Power Port
- 3. LED Indicators

- 4. Reset Button
- 5. RJ-45 LAN Port
- 6. USB Port

Key Features

- USB print server for network print sharing
- High-speed USB 2.0 interface
- Fast Ethernet network connectivity
- USB print server for network print sharing
- Easy set-up wizard included
- Web based user interface
- Support multiple operating systems
- Support multiple network printing protocols

Related Products



FPS-1031
Print Server with 1 Parallel Port



FPS-1033
Print Server with 2 USB and 1 Parallel Ports

Technical Specification

Standards Compliance

IEEE 802.3 10Mbps Ethernet
IEEE 802.3u 100Mbps Fast Ethernet

Network Interface

1x 10/100Mbps Auto-sensing RJ-45 port
1x USB 2.0 Auto-sensing port
DHCP Client

Operating System Support

Windows ME, 2000, XP, Vista
Mac OS 8.1 or higher
UNIX/Linux
NetWare (Bindery/NDS)

Network Print Protocol Support

TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB over
TCP/IP, Internet Printing Protocol (IPP), RAW

Software Upgradeable

Web interface
Windows-based Setup Program
TFTP

Device Management

Web-based user interface
Windows-based Setup Program
SNMP & HP Web JetAdmin Support

LEDs

Power/Status, Link, Activity

Power Supply

3.3V, 2A

Dimension

73.16mm (L) x 64.75mm (W) x 28.39mm (H)

Weight

56g

Operating Temperature and Humidity


Operating: 0°C ~ 50°C @ 0% ~ 70% (non-condensing)

Storage: -5°C ~ 65°C @ 0%~ 80% (non-condensing)

EMI Certifications

CE, FCC Class B

Product Diagram

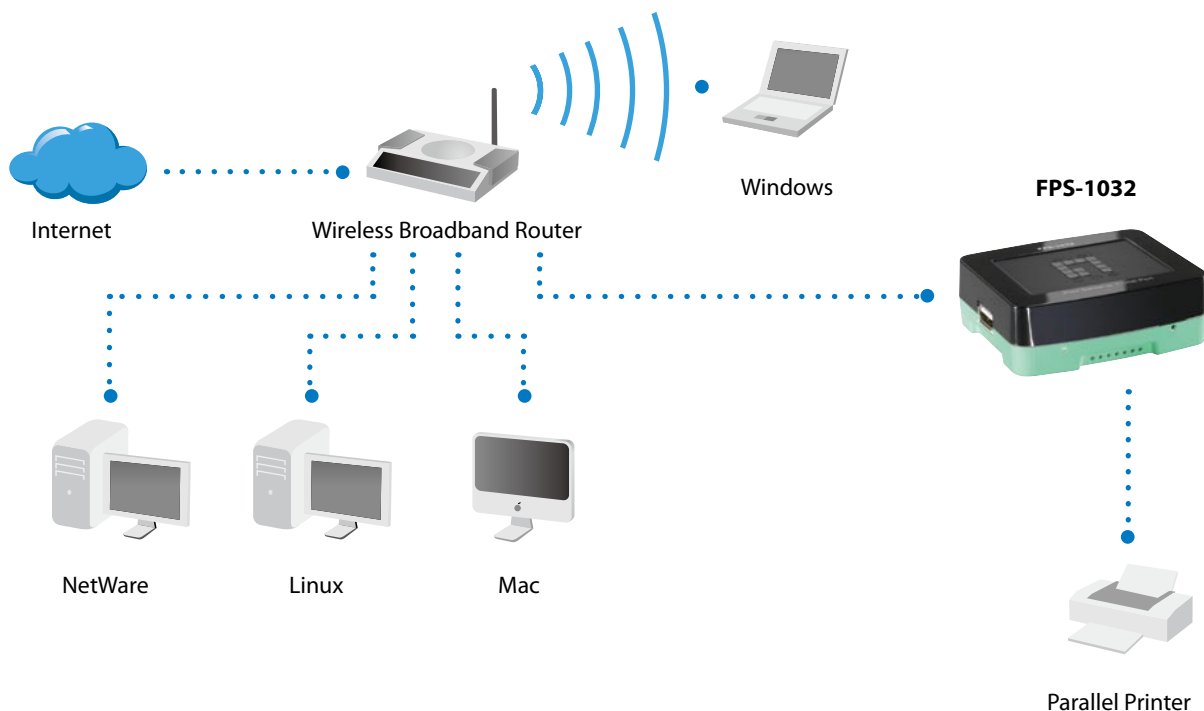

Order Information

Package Content

FPS-1032: Print Server with 1 USB Port

FPS-1032

Power Adapter

CD Manual/Driver/Utility

Quick Installation Guide