

# Print Server with 2 USB and 1 Parallel Ports

# H/W Version: 1

The LevelOne FPS-1033 print server is an ideal network printing solution for small offices, home offices, schools and other businesses that require printer sharing over the same network.

## **Multi Printer Support**

The FPS-1033 Multi Port print server provides simultaneous connectivity to two USB and one Parallel printers. It supports the USB 2.0 standard for highspeed printing.

#### **Multi OS and Network Printing Protocol Support**

The FPS-1033 Multi Port Print Server supports Windows ME, 2000, 2003, XP, Vista and 7 operating




FPS-1033

systems as well as Mac OS 8.1 and higher and UNIX/ Linux and Netware (Bindery/NDS). Network Print Protocol supported includes TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB over TCP/IP and IPP for flexible use with different network clients connected to the same office network.

#### **Easy Installation Wizard**

The LevelOne FPS-1033 is easily managed through a Web based user interface and the firmware is upgradeable through TFTP, the windows set-up program or the Web based user interface.

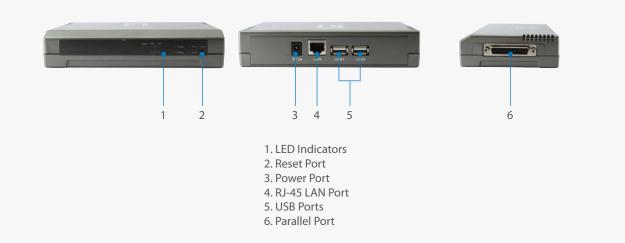

#### **Key Features**

- USB print server for network print sharing
- High-speed USB 2.0 interface
- Fast Ethernet network connectivity
- USB print server for network print sharing
- Easy set-up wizard included
- Web based user interface
- Support multiple operating systems
- Support multiple network printing protocols

#### **Related Products**




**FPS-1031** Print Server with 1 Parallel Port



**FPS-1032** Print Server with 1 USB Port **Technical Specification** 

Standards Compliance	Device Management
IEEE 802.3 10Mbps Ethernet	Web-based user interface
IEEE 802.3u 100Mpbs Fast Ethernet	Windows-based Setup Program
Network Interface	Telnet
1x 10/100Mbps Auto-sensing RJ-45 port	LEDs
2x USB 2.0 Auto-sensing port	Power/Status, Link, Activity
1x Parallel Printer Port (D-Type 25 pin female)	Power Supply
DHCP Client	5V, 2A
Operating System Support	Dimension
Windows ME, 2000, XP , Vista, 7	180mm (L) x 100mm (W) x 35mm (H)
Mac OS 8.1 or higher	Weight
UNIX/Linux	255g
NetWare (Bindery/NDS)	Operating Temperature and Humidity
Network Print Protocol Support	Operating: 0°C ~ 50°C @ 0% ~ 70% (non-condensing)
TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB over TCP/IP, Internet	Storage: -5°C ~ 65°C @ 0%~ 80% (non-condensing)
Printing Protocol (IPP), RAW	EMI Certifications
Software Upgradeable	CE, FCC Class B
Web interface	
Windows-based Setup Program	
TFTP	

## **Product Diagram**

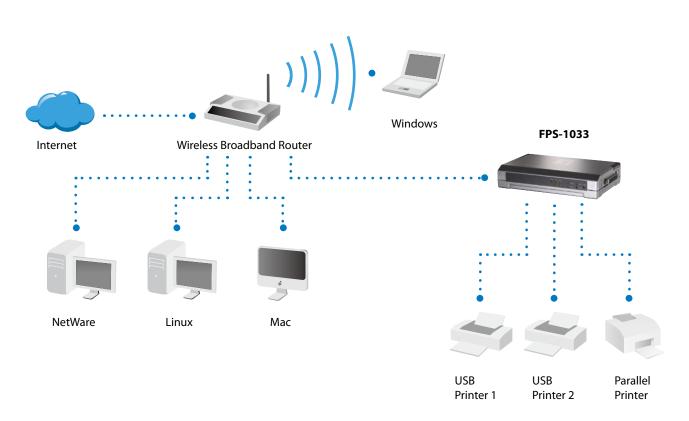

# Order Information Package Content

FPS-1033: Print Server with 2 USB and 1 Parallel Ports FPS-1033 Power Adapter CD Manual/Driver/Utility Quick Installation Guide

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.