

Mini Printer Server with One USB 2.0 Port

H/W Version: 1

One USB 2.0 Port Printer Server

LevelOne FPS-9022 is a Mini-sized Ethernet print server which is designed to perform with any standalone USB printer resource to network users.

Supports Peer-to-Peer and Server-Based Printing

Our LevelOne FPS-9022 supports both Peer-to-Peer and Server-based printing. Peer-to-Peer printing, which allows LAN clients connect directly with the printer server to execute printing functions; and Server-based printing, which allows other customers send print material first to a server which then connects with the printer server to execute printing jobs.



FPS-9022

Supports Complete Printing Methods and Major OS

The FPS-9022 printer server provides LPR, IPP, SMB/ TCP, Raw Printing and Unix Logical Printer printing methods. Simply choose the best method according to your environment.

Fault-Tolerant Firmware Upgrades

Users need not worry about errors occurring in the middle of an upgrade thus preventing the printer server from operating. This unit's fault-tolerant upgrade function allows for re-upgrades should problems occur during the initial upgrade.



Key Features

- Complies with IEEE 802.3, IEEE 802.3u Standards
- Provides one USB 2.0 printer port
- Supports Peer-to-Peer printing (TCP/IP/IPX/NetBEUI)
- Supports Server-based printing (Novell/Windows)
- Supports Fault-tolerant upgrade capability
- Supports Network Protocols: TCP/IP, IPX/SPX, NetBEUI and AppleTalk
- Supports Printing Protocols: LPR, IPP, SMB/TCP, Raw Printing and Unix Logical printing
- 98SE/ME/2000/XP, Netware (3.x above), Unix/Linux

Related Products



FPS-1031 Print Server with 1 Parallel Port




FPS-1033 Print Server with 2 USB and 1 Parallel Ports

Technical Specification

Processor	Interface
RISC CPU	Web-based management Interface
Memory	Windows Configuration Utility
2MB SDRAM	Upgrade
Flash	Fault-Tolerant Upgrade capability
512KB NOR Flash	LEDs
Standards Compliance	System power and status indicator
IEEE 802.3 10BaseT Ethernet	System activity and Network link indicator
IEEE 802.3u 100Base-TX Fast Ethernet	Power
Ports	7.5 VDC, 0.5A Power Adapter
1 x RJ-45 10/100 Mbps port	Temperature
1 x USB 2.0 Type A Port	Operating: 0-55°C
Supports Network Protocols	Humidity
TCP/IP	Operating: 10-90% (RH)
IPX/SPX	Dimension
NetBEUI	105mm(L) * 104mm(W) * 125mm(H)
Apple Talk	Weight
Supports Printing Protocols	420g
LPR	EMI and Safety
IPPSMB/TCP	FCC, CE
Raw printing	
Unix Logical Printing	
Compatible Operating System	
Windows [™] 98SE/ME/2000/XP	
NetWare (2.x Above)	
MAC OS	
Unix/ Linux	

Product Diagram

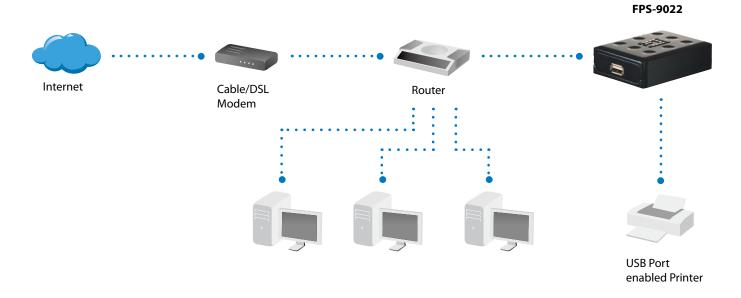

Order Information Package Content

FPS-9022: Mini Printer Server with One USB 2.0 Port

FPS-9022 Power Adapter CD Manual/Driver/Utility Quick Installation Guide

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.