



H/W Version: 4

Product Overview

The FSW-1650 switch provides an ideal solution for small businesses that demand a reliable network switch that provides a high bandwidth interface between file servers and workgroups, departments and offices.

Advanced Networking Features

The LevelOne FSW-1650 is a wire-speed, non-blocking 16 port Fast Ethernet Unmanaged Switch with an internal power supply. It provides a network with an 8K MAC address table, 3.2Gbps backplane throughput, asymmetrical flow-control support for full-duplex network connectivity, auto-negotiation and Auto-MDIX.

The 16-port Fast Ethernet Switch utilizes packetstore-and forwarding switching for error-free data transmissions and IEEE802.3x backpressure flow control to control data flow between the sending and receiving nodes as well as to prevent any data packet loss.

Compact Design

The FSW-1650 is a compact designed network switch. Users can place the switch on any desktop area or mount it in a 19-inch server rack or cabinet by using the included rack-mounting accessory kit.

Quick Configuration and Easy Maintenance

The LevelOne FSW-1650 does not require any software configuration. It is Plug-and-Play enabled for quick set-up and immediate use within the Local Area Network. The 16 port Faster Ethernet Switch is equipped with a full range of LEDs for instant error detection, networking monitoring and network troubleshooting.



Key Features

- 16 10/100Mbps NWay ports
- Fully compliant with IEEE 802.3az standard
- Supports 8K MAC address table
- Supports 3.2Gbps backplane throughput
- Supports IEEE 802.1P QoS (WRR 8:1)
- Accessory kit for mounting into a 19-inch server rack
- Supports back-pressure and flow control
- Store-and-forward architecture
- Internal power supply

Related Products



FSW-0511 5-Port Fast Ethernet Switch



FNC-0109TX 10/100 Mbps Ethernet Card


green level

FSW-1650

Technical Specifications

Network Interface	Memory
Standards	Packet Buffer: 160Kbytes
IEEE 802.3 10Base-T Ethernet	Status Indicators
IEEE 802.3u 100Base-TX Fast Ethernet	Link/ Act LED
IEEE 802.3x Flow Control and Back Pressure	Power LED
IEEE 802.1P Quality of service	100Mbps LED
IEEE802.3az Energy Efficient Ethernet	Physical Specifications
Network Interface	Internal Power Supply
16x 10/100 Mbps RJ-45 ports	100 ~ 240V AC, 50/60Hz
Network Cables	Power Consumption
10Base-T: 2-pair UTP/STP Cat.3/4/5, Up to 100 m	6.2 Watts
100Base-TX: 2-pair UTP/STP Cat. 5, Up to 100 m	Temperature
Data Transfer Rate	Operating: 0°C ~ 40°C
Ethernet: 10Mbps (Half-duplex)	Storage: -40°C ~ 70°C
Ethernet: 20Mbps (Full-duplex)	Humidity
Fast Ethernet: 100Mbps (Half-duplex)	Operating: 10% ~ 90% (Non-condensing)
Fast Ethernet: 200Mbps (Full-duplex)	Storage: 5% ~ 95% (Non-condensing)
Switching Protocol	Dimension & Weight
CSMA/CD	180mm (L) x 440mm (W) x 44mm (H)
Switch Architecture	2.05 kg
Store-and-Forward	Certifications
Backplane Throughput	FCC Class A
3.2Gbps	CE
MAC Address Table	RoHS
8K entries with Auto learning function	

Product Diagram

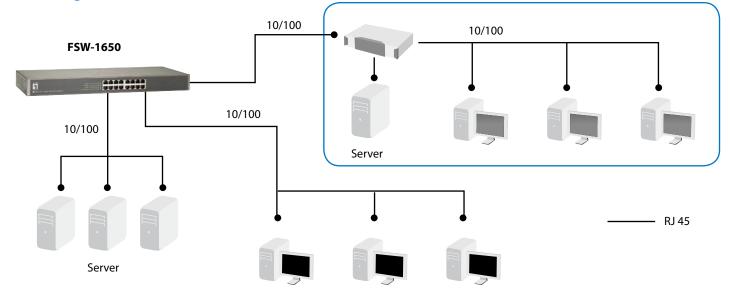

FSW-1650: 16-Port 10/100 Rackmount Switch

Order Information Package Contents

FSW-1650, Power Cord, Rack-mount Brackets, Quick Installation Guide

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.

© Copyright Digital Data Communications GmbH. All Rights Reserved.