

5-Port Gigabit Switch

H/W Version: 3

Product Overview

The LevelOne GSW-0507 Gigabit Ethernet Switch is designed for reliable high-performance networking. With its non-blocking switching fabric in full-duplex mode, this switch can deliver up to 2000Mbps per port, while the Store-and-Forward service brings low latency and error-free packet delivery. This highperformance Gigabit Ethernet switch is perfect for fulfilling the demands of online gaming and multimedia streaming. Moreover, this switch also supports IEEE 802.3az Energy Efficient Ethernet which helps reduce power consumption.

Power Saving Features

The GSW-0507 supports IEEE 802.3az Energy Efficient Ethernet to provide power-saving benefits without compromising performance. One of the ways it



GSW-0507


does this is by automatically detecting the length of connected cables and can adjust power usage by saving energy on shorter cable connections.

Compact and Stylish Design

The stylish, compact wall-mountable housing of GSW-0507 fits any working environment. It comes with 5 10/100/1000Mbps ports to meet SOHO and home network expansion needs.

Easy to Use

The GSW-0507 features plug-and-play for easy installation. No configuration is required. Autonegotiation on each port senses the link speed of a network device and adjusts for compatibility and optimal performance.

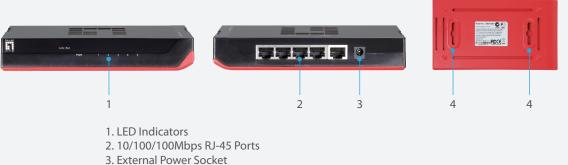

4. Wall-Mountable

Key Features

- 5 x 10/100/1000Mbps Auto-negotiation Gigabit Ethernet ports
- Auto MDI/MDI-X for each port
- Supports full duplex transfer mode for 1000Mbps
- Supports 8K absolute MAC addresses
- Supports 128KBytes RAM for data buffering
- Supports IEEE 802.3x full-duplex / half-duplex backpressure flow control
- Supports 9KB Jumbo Frames
- Supports IEEE 802.3az Energy Efficient Ethernet

Works well with



WGR-6012 300Mbps Wireless Gigabit Router




GNS-1001 1-Bay Gigabit Network Storage

Technical Specifications

Standard Compliance	Physical Specifications	
Compliant	LED Indicators	
IEEE802.3 (10BASE-T)	System: Power	
IEEE802.3u (100BASE-T)	Port: Link/Act	
IEEE802.3ab (1000BASE-T)	Temperature	
IEEE802.3az Energy Efficient Ethernet	Operating: 0°- 40° C (32° - 104° F)	
Network Interface	Storage: -40°C ~ 70°C (-40°~158°F)	
Ports	Humidity	
5 * 10/100/1000Mbps RJ-45 NWay ports	Operating: 10% ~ 90% (non-condensing)	
NWay Protocol Support	Storage: 5%~90% RH, non-condensing	
10 / 100Mbps: Full-duplex, Half-Duplex	Dimension (L x W x H)	
1000Mbps: Full-duplex	160mm x 90mm x 29 mm	
MAC Address Table	Power Supply	
8K	External power adapter DC 5V /1A	
Jumbo Frame	Mounting Design	
9K	Wall mountable	
Buffer Memory	Emission	
128 KB	FCC, CE, VCCI Class A	

Product Diagram

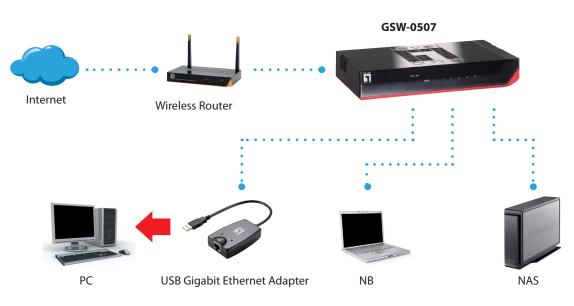

Order	Infor	mation
Packa	ge Co	ontents

GSW-0507: 5-Port Gigabit Switch

GSW-0507 Power Adapter Quick Installation Guide Wall-Mount Kit

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.