

8-port Gigabit Switch

Gigabit Ethernet Solution-- LevelOne's GSW-0806 Gigabit Ethernet Switch is an ideal solution for solving traffic block at the core of the network. It is equipped with 8 Gigabit Ethernet ports and reaching 10Gbps backplane bandwidth thus creating high-speed backbone data transmissions. With its Gigabit Technology, this GSW-0806 is able to handle the multi-media, video streaming or real-time broadcast applications through your workgroup. Moreover, this switch will also fit into any enterprise level network to act as an exit to the backbone switch.

Switching Technology -- This GSW-0806 combines dynamic memory allocation with a store-and-forward switching architecture to ensure that the buffer is effectively allocated for each port. It also controls the data flow between transmit and receive nodes to guarantee against all possible packet loss. All ports support Auto-MDIX allowing uplinking to another switch directly without cable selection hassle.

Easy to Use -- This unit is small and desktop-sized specially designed to fit in space-limited locations. Users can immediately use any of the features of this product simply by attaching the cables and turning on the power to improve your network backbone performance. For instant error detection, the switch is equipped with a full range of LEDs to help you monitor and troubleshoot problems on your network.



GSW-0806

Related Products



GSW-0506

5-port Gigabit Switch



GSW-0804

8-port Gigabit Switch


Key Features

- 8-port 10/100/1000 Mbps Gigabit Switch
- Complies with IEEE 802.3, 802.3u, 802.3ab
- Supports Auto-negotiation for speed and duplex modes for each port
- Up to 16Gbps Backplane bandwidth
- Supports Auto-MDI/MDI-X for each port
- Supports 8K absolute MAC addresses
- Supports 144KBytes RAM for data buffering
- Store-and-Forward switching architecture
- Front-panel diagnostic LEDs
- IEEE 802.3x flow control for full-duplex
- Back pressure flow control for half-duplex

Technical Specification

- **Standards Compliance**
IEEE 802.3: 10 BASE-T
IEEE 802.3u: 100 BASE-TX
IEEE 802.3ab: Gigabit Ethernet
IEEE 802.3x Flow Control for Full-Duplex
- **Ports**
8 x RJ-45 10/100/1000 Mbps ports
- **Protocol**
CSMA/CD
- **Switching Method**
Store-and-Forward switching architecture
- **Transfer Rate**
14,880 pps for 10Mbps
148,800 pps for 100Mbps
1,488,000 pps for 1000Mbps
- **Cabling**
Ethernet: 2-pair UTP/STP Cat.3,4,5, EIA/TIA-568 100-ohm
Fast Ethernet: 2-pair UTP/STP Cat. 5, EIA/TIA-568 100-ohm
Gigabit Ethernet: 4-pair UTP/STP Cat.5, EIA/TIA-568 100-ohm
- **Backplane**
16Gbps
- **MAC Address Table**
8K entries per device
- **Buffer**
144KBytes per device
- **LEDs**
Per Device: Power
Per Port: 100/1000, Link/Act, Full-Duplex/Collision
- **Power Supply**
External power DC 7.5V/1A
- **Power Consumption**
7.5 Watts (max)
- **Temperature**
Operating: 0°C ~40°C
Storage: -10°C ~70°C
- **Humidity**
Operating: 5% ~ 95% Non-Condensing
- **Dimension**
175mm(W) * 104mm(H) * 33mm(D)
- **EMI and Safety**
FCC class B, CE Marking Class B, VCCI Class B

Product Diagram

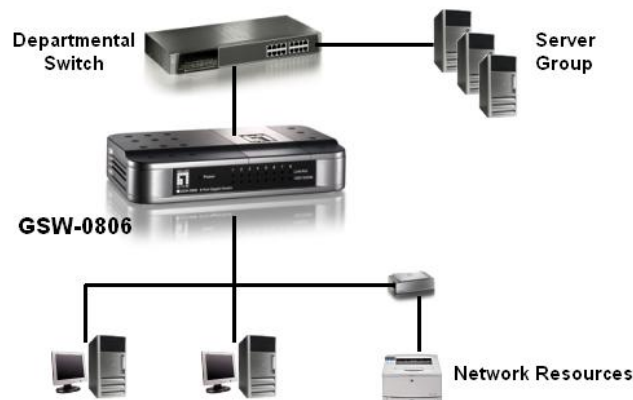

Ordering Information

- GSW-0806: 8-Port Gigabit Switch