

HDSpider™ HDMI Cat.5 Sender + 1HDMI Out



HVE-9002

H/W Version: 1

What is HDMI?

The High-Definition Multimedia Interface (HDMI) is a revolutionary technology that allows viewers to experience the highest quality digital images available. It is able to deliver top-quality video as well as audio over a single cable.

Introducing the HDSpider™ Series from LevelOne

The HDSpider™ Series is a collection of HDMI Cat.5 senders and receivers, offering a full range of HDMI extender solutions. Choose from our 5 different HDSpider extenders to build a flexible network to send your high-quality HDMI signals to greater distances, and at a reduced cost.

What does a Cat.5 sender + 1 HDMI Out do?

This compact device is deployed at the HD source, generally connected to an HD player,

PS3, or Xbox 360. HVE-9002 accepts the HD signal from the HDMI source and then uses Cat.5 cable to send the HDMI signal to the receiver. This allows for a cost-effective long range HDMI solution, up to 60 meters with Cat.5 cable as the signal carrier. HVE-9002 also includes a local HDMI port which allows for an additional monitor to be placed next to the device. This is especially useful for deploying an HDMI network that has requires many different displays in one area. HVE-9002 also supports full 1080p resolution and has an audio out port.

Surround sound: HVE-9002 also supports 7.1 multichannel stereo surround sound, providing an easy way to extend the high-quality video of HDMI with the superior 7.1 capabilities of Dolby Digital Plus. To see this device in action, please see the diagram below.



- 1. Power LED
- 2. Power Indicator
- 3. Dip Switch
- 4. HDMI Input Port



- 5. 3.5mm Audio Socket
- 6. HDMI Output Port
- 7. RJ-45 Output Port
- 8. Power Jack

Key Features

- Supports default HDMI EDID and records the EDID of displays
- HDCP compliance
- Works with Cat5, Cat5e, Cat6 Ethernet Cable
- Transmission distance of up to 60 meters for 1080i and 40 meters for 1080p
- Supports 1080p resolution

Works Well With



HVE-9003 HDSpider™ HDMI Cat.5 Sender (Cascadable)




HVE-9000 HDSpider™ HDMI Cat.5 Receiver (Long)

Technical Specifications

| Model No. | HDMI Transmitter | | | HDMI Receiver | |
|-------------------|--------------------------|-------------------------|----------------------------|-------------------------|------------------------|
| | HVE-9001 | HVE-9002 | HVE-9003 | HVE-9900 | HVE-9000 |
| Product Name | HDSpider™ HDMI | HDSpider™ HDMI | HDSpider™ HDMI | HDSpider™ HDMI | HDSpider™ HDMI |
| | Cat.5 Sender | Cat.5 Sender+ 1HDMI Out | Cat.5 Sender (Cascadable) | Cat.5 Receiver (Short) | Cat.5 Receiver (Long) |
| RJ-45 Input | - | - | 1 | 1 | 1 |
| RJ-45 Output | 1 | 1 | 1 | - | - |
| HDMI Input | 1 | 1 | - | - | - |
| HDMI Output | - | 1 | 1 | 1 | 1 |
| Max Resolution | 1080i/1080p @60m/40m | | | 1080i/1080p @15m/20m | 1080i/1080p @60m/40m |
| Cascadable | - | - | ∞ | - | - |
| Audio | 7.1-channel | | | | |
| LED | Power and Activity | | | | |
| Power Consumption | 5V/2Am | 5V/4Am | | - | 5V/2Am |
| Dimensions(mm) | 87 L x 60 W x 25 H | 180 L x 108 W x 27 H | | 45 L x 25 W x 20 H | 87 L x 60 W x 25 H |
| Operating Temp. | 0° C ~40° C | | | | |
| Storage Temp. | -20° C ~ 60° C | | | | |
| Humidity | 20% ~ 90% Non-Condensing | | | | |

Prodouct Diagram

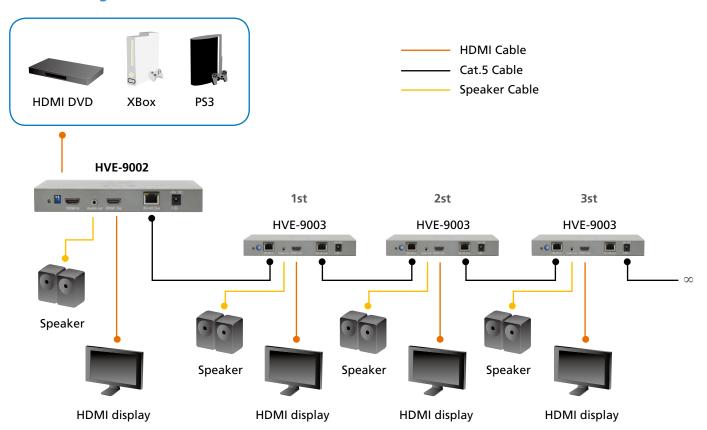

Order Information
Package Contents

HVE-9002: HDSpider™ HDMI Cat.5 Sender + 1HDMI Out

HVE-9002, Power Adapter, User Manual