

HDSpider™ HDMI Cat.5 Receiver (Short)

H/W Version: 1

What is HDMI?

The High-Definition Multimedia Interface (HDMI) is a revolutionary technology that allows viewers to experience the highest quality digital images available. It is able to deliver top-quality video as well as audio over a single cable.

Introducing the HDSpider™ Series from LevelOne

The HDSpider[™] Series is a collection of HDMI Cat.5 senders and receivers, offering a full range of HDMI extender solutions. Choose from our 5 different HDSpider extenders to build a flexible network to send your high-quality HDMI signals to greater distances, and at a reduced cost.



HVE-9900

What does a short-range Cat.5 receiver do?

HVE-9900 is a great accessory to a large HDMI network. As a short-range connector that attaches to the end of a Cat.5 cable, you're able to get full HDMI quality, without the expensive HDMI cost.

When used in conjunction with the other HDSpider Series from LevelOne, HVE-9900 offers up to 25 meters deployment range with no quality loss. Sturdy and reliable construction means that once you plug and play, your network is ready to stream full HD quality signals to wherever you choose.



1. RJ-45 Port 2. HDMI Port

Key Features

- Connects directly to the monitor, no need to buy extra HDMI cable
- Top quality transmission of Full HD (15m), regular HD (25m)
- No data loss
- Works with Cat.5, Cat.5e, Cat.6 cables

Works Well With



HVE-9001 HDSpider™ HDMI Cat.5 Sender




HVE-9002 HDSpider™ HDMI Cat.5 Sender + 1HDMI Out

Technical Specifications

Model No.	HDMI Transmitter			HDMI Receiver	
	HVE-9001	HVE-9002	HVE-9003	HVE-9900	HVE-9000
Product Name	HDSpider™ HDMI	HDSpider™ HDMI	HDSpider™ HDMI	HDSpider™ HDMI	HDSpider™ HDMI
	Cat.5 Sender	Cat.5 Sender+ 1HDMI Out	Cat.5 Sender (Cascadable)	Cat.5 Receiver (Short)	Cat.5 Receiver (Long)
RJ-45 Input	-	-	1	1	1
RJ-45 Output	1	1	1	-	-
HDMI Input	1	1	-	-	-
HDMI Output	-	1	1	1	1
Max Resolution	1080i/1080p @60m/40m			1080i/1080p @15m/20m	1080i/1080p @60m/40m
Cascadable	-	-	00	-	-
Audio	7.1-channel				
LED	Power and Activity				
Power Consumption	5V/2Am	5V/4Am		-	5V/2Am
Dimensions(mm)	87 L x 60 W x 25 H	180 L x 108 W x 27 H		45 L x 25 W x 20 H	87 L x 60 W x 25 H
Operating Temp.	0° C ~40° C				
Storage Temp.	-20° C ~ 60° C				
Humidity	20% ~ 90% Non-Condensing				

Prodouct Diagram

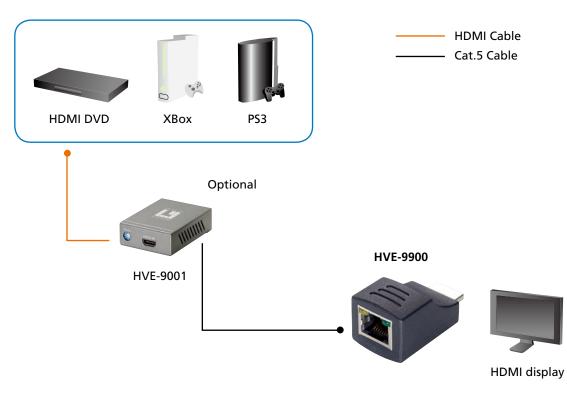

Order InformationHVE-9900: HDSpider™ HDMI Cat.5 Receiver (Short)Package ContentsHVE-9900, User Manual

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.