

# Datasheet\_KVM-0203

# Datasheet\_KVM-0204

## 2-Port Cable KVM Switch wo/w Audio for USB

**LevelOne's** KVM-0203/0204 are 2-Port Cable KVM switch for USB. The KVM-0203/0204 can control two workstations (with USB keyboard and mouse) from One Keyboard, Mouse, VGA Monitor. With built-in KVM cable kit, no extra cable is needed when install this device to your network environment.

KVM-0204 has microphone and speaker embedded which supports Audio function for multimedia applications without the need to prepare extra cables. Besides, both of these models support wide range of PC hardware and software platform and have complete keyboard and mouse emulation for simultaneous PCs boot-up process.

The KVM-0203/0204 supports all major Network Operating Systems (NOS) including Windows™ 98/ 98SE/ ME/ XP/ 2000/NT, Netware, Unix/ Linux/ Sun Solaris, and MacOS 8.6 or later version. The true Plug-and-play technology allows you to access any of the features of this product simply by plugging cables to workstation and it's ready to go. The compact-sized design will save the limited space and thus can be located anywhere on the network. To avoid bulky peripherals for USB interfaces, KVM-0203/0204 is the best KVM solution to save your money, time, space and power.



**KVM 0203/0204**

### Key Features

- Compact size design for easy portable
- Built-in KVM cable kit, no extra cable needed
- Built-in microphone and speaker jacks for multimedia application (Only for Audio model)
- Supports individual USB mouse, individual USB keyboard or USB keyboard and mouse combination in console port
- Supports Netware, Unix, Linux, Sun Solaris, MacOS 8.6 or later version, and Windows 98/98SE/ME/XP/2000/NT,
- Hot Plug - Add/Remove Connected PCs for maintenance without powering down the KVM switch or PCs
- High video quality, up to 2048 x 1536 @ 400MHz
- No Software Required - easy PC selection via Push Buttons, Hot Keys
- Auto Scan Mode for monitoring PCs
- Keyboard status restored when switching PCs
- LED display for easy status monitoring


# Datasheet\_KVM-0203

# Datasheet\_KVM-0204


## Technical Specification

Model	KVM-0203	KVM-0204
PC Port	2	2
Console Port	2 USB Type A Ports	2 USB Type A Ports
Console Port Connector	2 x USB type A receptacles 1 x VGA HDDB 15 pin Female	2 x USB type A receptacles 1 x VGA HDDB 15 pin Female 1 x 3.5mm Audio Jack 1 x 3.5mm Microphone Jack
Console Audio Port	0	1
PC port Cable	Two 2-in-one USB A-B/VGA cables	Two 4-in-one USB A-B/VGA/Audio Cable
Built-in KVM Cable Length	6 feet	
Max PC Connections	2 PCs	
PC Selection	Hot Key	
LEDs	2	4
Scan Intervals	5,10,20,30,40,50,60,70,80,90,100 Sec	
VGA Resolutions	2048 x 1536	
Bandwidth	400MHz	
Temperature	Operation: 0~50°C Storage: -20~60°C	
Humidity	0~90%, Non-Condensing	
Dimension	83mm(L)* 65.5mm(W)* 29mm(H)	
Weight	425 g	510 g
EMI and Safety	CE, FCC	

## Product Diagram

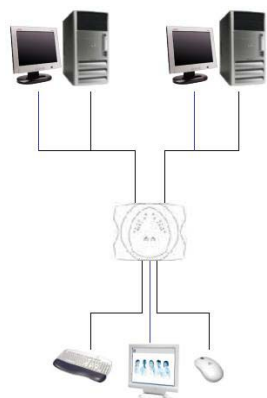

KVM-0203 Product Diagram

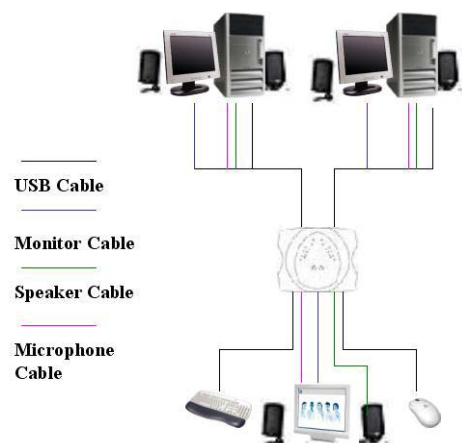

KVM-0204 Product Diagram

- KVM-0203: 2-Port Cable KVM switches for USB
- KVM-0204: 2-Port Cable KVM switches w/audio for USB