

# 2-Port USB KVM Switch



#### **Product Overview**

The LevelOne KVM-0223 is an easy to use 2-port USB interface KVM switch for connecting 2 multi-platform operating system computers to a single keyboard, mouse and monitor. It also allows users to connect audio from the connected computers to a single audio system.

#### **Multi-Platform Use**

The KVM-0223 supports multi-platform computer systems, enabling users to connect MAC and PC platform computers to a single console. With easy hotkey swap selection between computers, users can operate both systems simultaneously.



KVM-0223

All cables needed are already connected to the KVM switch. Users can connect the USB KVM without any need for additional software installation or system configuration. Also, the KVM-0223 requires no power to operate.

#### **High Quality Audio/Video Support**

The 2-port KVM-0223 supports DDC2B and VGA resolutions of up to 2048 x 1536 pixels. The switch also incorporates audio support, allowing users to connect audio channels of both systems to a single audio system.



- 1. USB Console Port
- 2. Video Console Port
- 3. USB Console Port
- 4. Speaker Jack
- 5. Port LED
- 6. Video Connector
- 7. Speaker Connector
- 8. USB Connector

## **Key Features**

- 2-port USB KVM Switch for home or office use
- Connect multi-platform operating system computers to a single keyboard, mouse and monitor
- Supports high-video quality up to 2048 x 1536 pixels
- Easy installation with no software installation
- All cables attached, ready-for-use
- Features audio support
- Provides auto-scanning
- LED display for easy status monitoring
- Provides Hot-Key port switching

### **Related Products**



KVM-0213 2-Port PS/2 KVM Switch




**KVM-0260** 2-Port USB DVI KVM Switch w/ Audio

## **Technical Specification**

Console Port:	PC Cable Length:
Keyboard: USB 2.0	1.2m
Mouse: USB 2.0	Max. Resolution:
Video: VGA	2048 x1536
PC Port:	Scanning Interval:
Keyboard: USB x 2	5 Seconds
Mouse: USB x 2	Operating Temp.:
Video: VGA x 2	0~50°C
Stereo Audio Input:	Storage Temp.:
3.5mm jack	-20°C~60°C
Ionitor Supported:	Humidity:
VGA	0~80% RH Non-Condensing
LEDs:	Enclosure:
2 Port Status LEDs	High- impact Plastic
HUB Supported	Weight (g) :
V	400
Mic Supported	Dimensions (L x W x H)
	8.1cm x 6.3cm x 2.35 cm
Molding Cable:	OS Supported:
<u>V</u>	Win & Mac
Console Cable Length:	
1.2m	

## **Product Diagram**

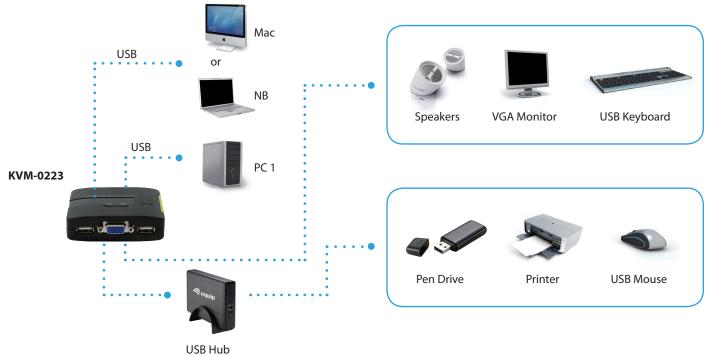

Order Information	K
Package Content	K١
	Us

VM-0223: 2-Port USB KVM Switch VM-0223 User Manual Quick Installation Guide

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.