



3 Port DVI KVM Switch with Audio



KVM-0306

H/W Version: 1

Saves Space, Time and money

The LevelOne KVM-0306 DVI KVM switch with 3 ports saves desktop space. There is no need to work on a crowded desk cramped with several monitors, keyboards and mouse devices. Also, time to move from different monitors to access different systems are done away with. With only one monitor and keyboard and mouse, users can now access 3 computers of servers from one location quick and cost effective.

Monitor 3 systems from 1 console


This high quality and durable DVI switch enables users to control 3 host computers or servers by using PS/2 and USB connectors from one console. Monitoring different systems is as easy as to connect them to this switch via PS/2 and USB Mouse connectors. The switch allows for input and monitoring of systems connected through its PS/2, USB Keyboard and Monitor.

Audio Enabled

The KVM-0306 DVI switch has connectors for audio input and output. By simply connecting a microphone and speakers or earphones to the KVM switch, users can enjoy more interaction with the systems the KVM switch connects to.

Easy to Use

The LevelOne KVM-0306 DVI switch switches DVI, USB and audio between computers or servers. Simply plug peripherals directly into the KVM switch and connect cables to the computers or servers to be monitored or controlled. Switching between either Macintosh or PC systems are easily done by either pushing a button or by using hot-key commands.

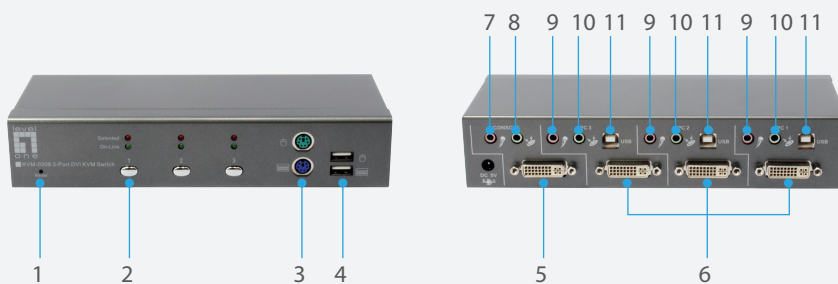

1. Reset Port
2. PC Selection Button
3. PS/2 Console Port
4. USB Console Port
5. DVI Console Port
6. DVI PC Port
7. Mic Console Port
8. Audio Console Port
9. Mic PC Port
10. Audio PC Port
11. USB PC Port

Key Features

- Controls 3 DVI computers from a single console through USB and/or PS/2 connections.
- Supports hot-swap
- Supports LED display for PC status monitoring
- Supports DVI UXGA resolutions up to 1600 x 1200 @ 60HZ
- Self powered through USB connection
- Fully compliant with the USB 1.1/ 2.0 specification
- without HDCP

Related Products



KVM-0206
2-port DVI KVM Switch with audio for PS/2



KVM-0406
4-port DVI KVM Switch with audio for PS/2

Technical Specification

Console Port:

Keyboard: USB x 1 & PS/2 x 1
 Mouse: USB x 1 & PS/2 x 1
 Video: DVI
 Audio Input/ Output: 3.5mm jack x 1
 Mic Input/ Output: 3.5mm Mic jack x 1

PC Port:

Video: DVI x 3
 USB: B Type USB jack x 1
 Audio Input/ Output: 3.5mm jack x 3
 Mic Input/ Output: 3.5mm Mic jack x 1

Monitor Supported:

UXGA

LEDs:

3 LEDs

PC Selection:

Push Button / Hot Key / Auto Switching

Power:

External Power Adapter 5V/2A

Microphone Supported:

V

Cables:

DVI + USB / Audio Cable sets x 3

Max. Resolution:

1600 x 1200

Scanning Interval:

5 to 250 Seconds

Operating Temp.:

0~50°C

Storage Temp:

-20~60°C

Humidity:

0~80 % RH

Enclosure:

Iron

Weight (g):

845


Dimensions (L x W x H):

210mm x 92mm x 54mm

OS Supported:

Win & Mac

Product Diagram

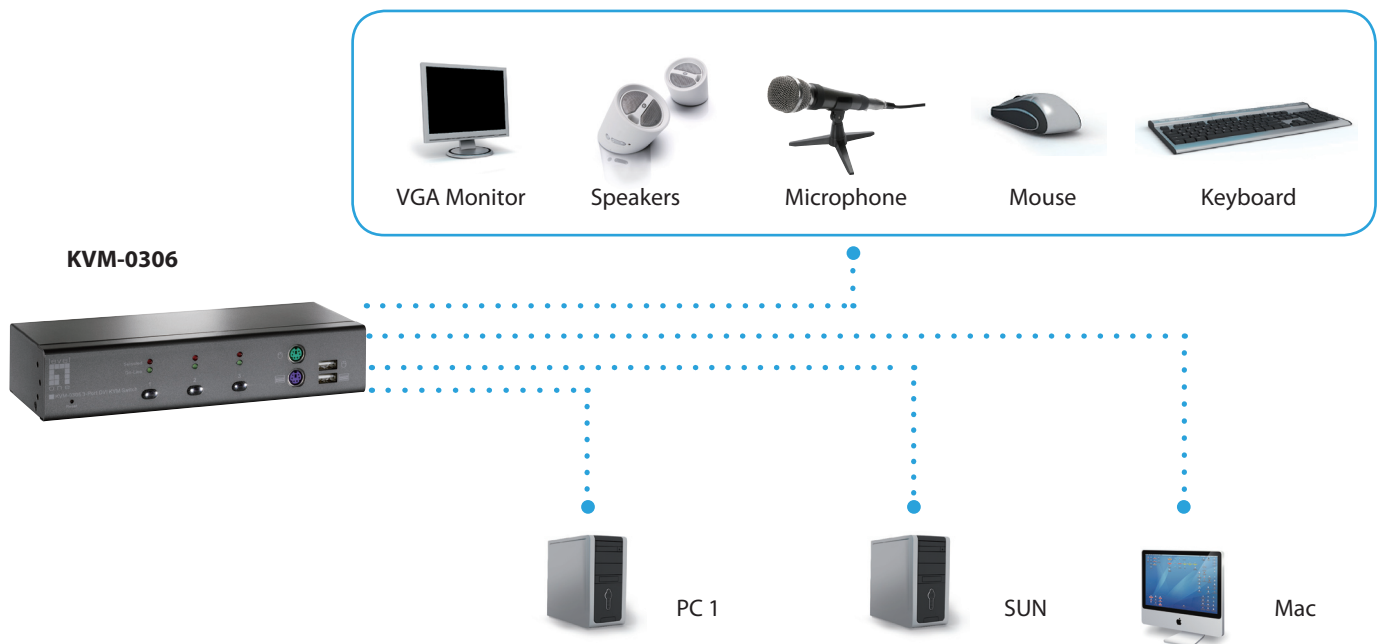

Order Information

KVM-0306: 3-Port DVI KVM Switch with Audio

Package Content

KVM-0306
 DVI + USB/Audio Cable Sets x3
 User Manual