



4-Port PS/2 KVM Switch



KVM-0412

H/W Version: 1

Product Overview

The KVM-0412 4-Port PS/2 KVM Switch from LevelOne offers users with an easy to install KVM switch that can manage four computers from a single monitor, keyboard and mouse.

It allows users to access, control, boot and reboot four PS/2-enabled multimedia computers using a single PS/2 keyboard, mouse and monitor.

Flexible Multi-Computer Management Feature


Users are now offered with flexible multimedia support. The KVM-0412 offers users with user-programmable simultaneous or independent PC

switching. This enables users to work on one computer while simultaneously using the other computers for work or fun.

Easy to Switch between Computers

The KVM-0412 switches between computers either through the pushbuttons located on the switch or by using keyboard hot keys. The KVM switch also offers user the ability to program the auto-scan function for automatic switching between computers.

The LED display offers an "at-a-glance" status display for easy computer activity assessment.

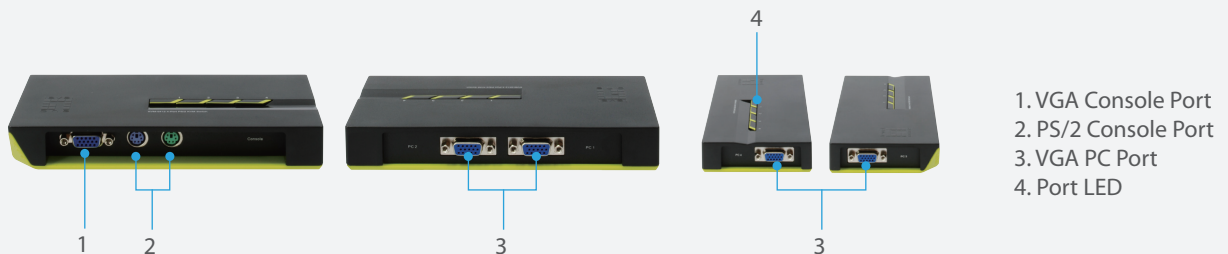

Key Features

- Control and manage four computers using a single PS/2 keyboard and mouse and monitor
- Simultaneous and independent PC user-programmable switching
- High 2048 x 1536 pixels VGA resolution
- Easy switching between computers with Auto-scan, keyboard hotkeys and push button selection
- At-a-glance LED display for easy monitoring of PC activity
- True Plug-and-Play operation without any software installation or power supply
- PS/2 interface power supply

Related Products



KVM-0212
2-Port PS/2 KVM Switch



KVM-0211
2-Port PS/2 KVM Switch
w/ Audio

Technical Specification

Console Port:

Keyboard: PS/2 x 1

Mouse: PS/2 x 1

Video: HDB 15-pin (Female)

PC Port:

HDB 15-pin Female (Integrated w/ PS/2 Interface) x 4

Monitor Supported:

VGA / SVGA / QXGA / WUXGA

LEDs:

4 LEDs

PC Selection:

Push Button / Hot Key / Auto Switching

Power:

PS/2 Interface Power

Microphone Supported:

-

Cables:

PS/2 KVM Combo Cable Sets (1.8m) x 4

Max. Resolution:

2048 x 1536

Scanning Interval:

5,10,20,30,40,50,60,70,80,90,100 Seconds

Operating Temp.:

0~50°C

Storage Temp:

-20~60°C

Humidity:

0~80 % RH Non-Condensing

Enclosure:

High-impact Plastic

Weight (g):

211


Dimensions (L x W x H):

164mm x 72mm x 26mm

OS Supported:

Win

Product Diagram

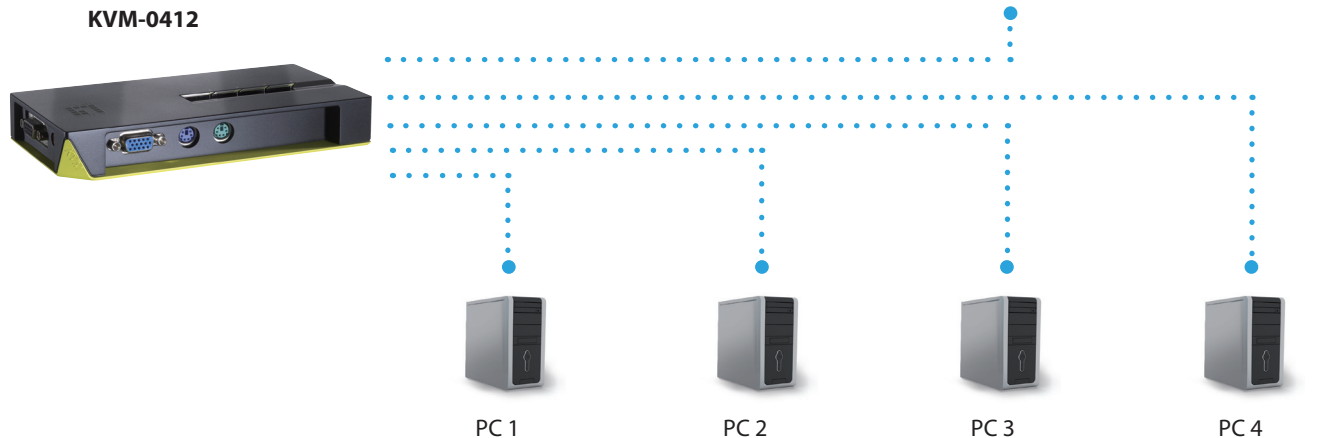

Order Information

Package Content

KVM-0412: 4-Port PS/2 KVM Switch

KVM-0412

KVM cable sets

CD Manual

Quick Installation Guide