



USB 2.0 Docking Station



UDS-1000

H/W Version: 3

LevelOne UDS-1000 Docking Station allows the user to connect parallel, serial, Ethernet and USB 2.0 devices to his notebook or PC. The VGA pass-through feature makes connecting all peripherals easy and convenient. The user can leave each device attached to the Docking Station, remove the Notebook computer for travel; then, when he returns, he just plugs in the docking station and instantly connects all devices back to the notebook. For customers

using a stationary PC and a notebook computer for mobile use, switching all peripherals between the PC and the notebook has never been easier. This USB2.0 Docking Station provides three USB 2.0 ports, one parallel port, one RS-232 serial port, one 10Base-T/100Base-TX Ethernet port, PS/2 ports for keyboard and mouse and VGA pass-through. An external power supply unit is provided as well as a USB/VGA cable



1 2 3

1. PS/2 Keyboard
2. PS/2 Mouse
3. VGA In(Y Cable)



4 5 6 7 8 9

4. Power Connector
5. VGA Out
6. USB 2.0
7. Printer Port
8. Serial Port
9. 10/100Mbps Ethernet Port

Key Features

- Instantly converts your laptop into networked desktop workstation
- Adds a Parallel, Serial, 10/100M Ethernet LAN, PS/2 Keyboard/Mouse and three USB 2.0 ports to your laptop or desktop system
- Backward compatible with USB 1.1 devices
- Use USB bus-powered or self-powered with included power adapter
- Connect your desktop monitor to your laptop with VGA pass-through
- Easy installation and compatible with Windows 98SE/ME/2000/XP/Vista and Mac OS 10.3/10.4

Works Well With



FNC-0107TX
Fast Ethernet PCI card



FPC-0106TX
Fast Ethernet 32-bit CardBus Adapter

Technical Specification

Standards

802.3 10BASE-T

802.3u 100BASE-TX

USB version: USB 1.0/USB 1.1/ USB 2.0

HID version: USB HID 1.1

Connect Ports

1 x USB Upstream Port

3 x USB Downstream Port (USB 2.0)

2 x Mini PS/2 Port (Keyboard, Mouse)

1 x RS-232 Port (DB-9)

1 x IEEE-1284 Printer Port (DB-25)

2 x VGA Db15

Bus-Power Limit Current Protection

500mA (When external adaptor applied)

Basic Power Consumption

450mA

Over-Current Protection

Yes

Power Adaptor

DC 5V/2A

Power & Access LED Indicator

Yes

Temperature

Operating: 0°C ~ 70 °C

Storage: 0°C to 85 °C

Humidity

0% ~ 80% RH, non-Condensing


Dimension

236mm(L) x 28mm(W) x 58mm(D)

Weight

210g

Product Diagram

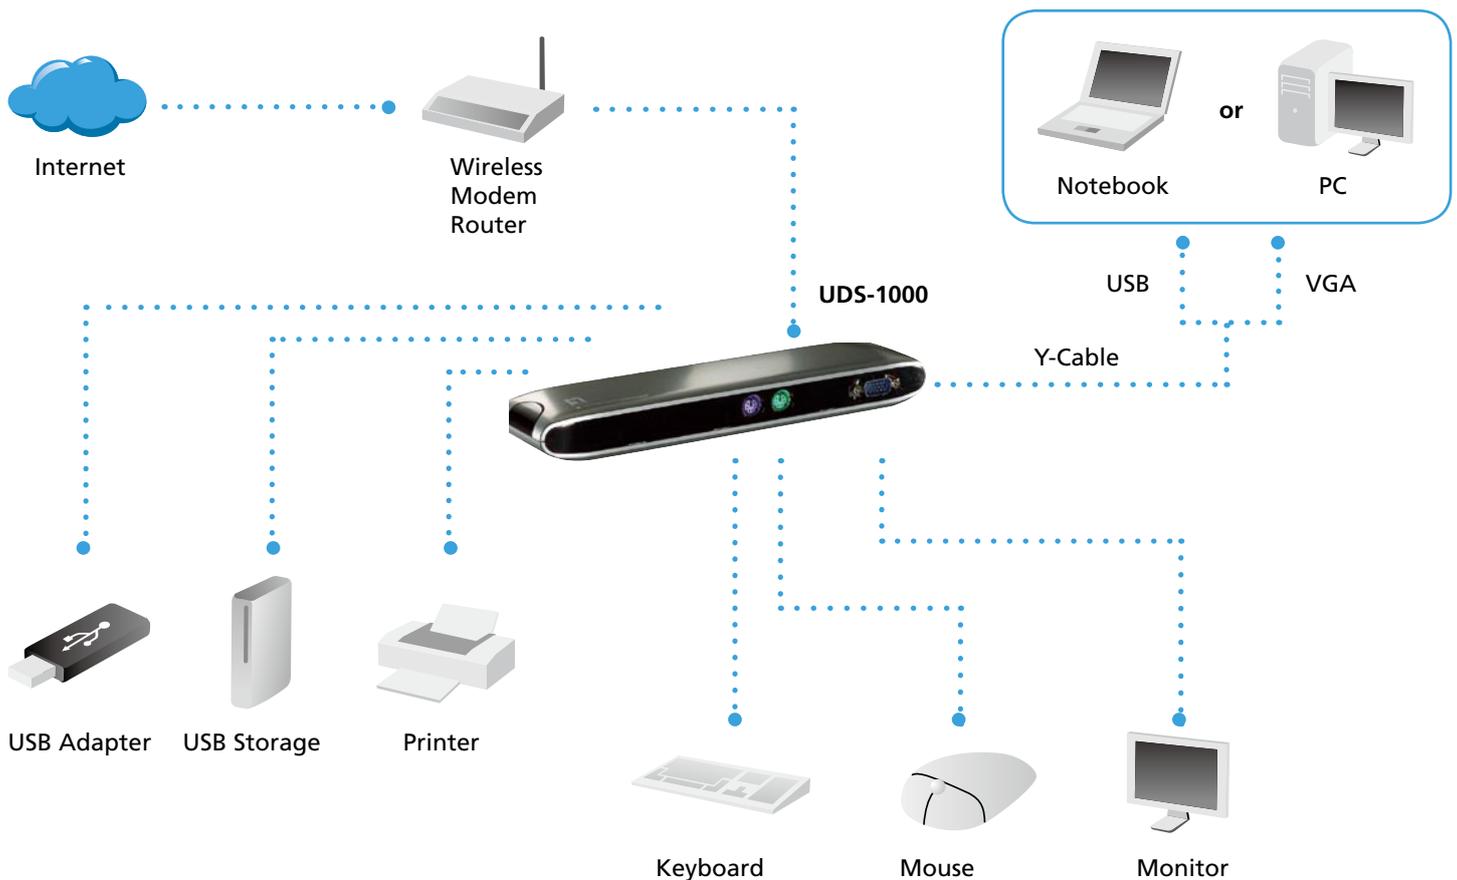

Order Information

UDS-1000: USB 2.0 Docking Station

Package Contents

UDS-1000

VGA/USB Combo Cable

Power Adapter

CD Manual/ Driver