



USB Gigabit Ethernet Adapter



USB-0401


H/W Version: 2

LevelOne USB Gigabit Ethernet Adapter is a USB adapter that enables desktop and notebook computers with high-speed Gigabit network connectivity via the USB port.

USB-0401 is USB2.0 as well as IEEE802.3 (10Mbps), 802.3u (100Mbps) and 802.3ab (1000Mbps) compliant, ensuring that users can utilize any networking environment available.

It supports hot inserting and swapping, meaning that USB-0401 can be installed quick and easy without shutting down the computer or opening up the computer box to install new network interface cards.

With low power consumption and mobility without the need of any additional power cords, notebook computer users greatly benefit from using this network interface adapter.

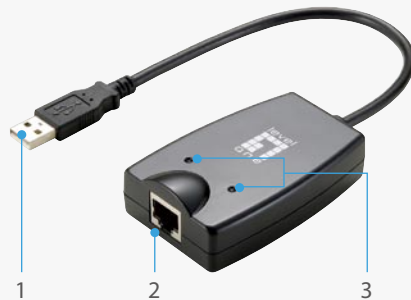

1. USB 2.0 Connector
2. RJ-45 Ethernet Port
3. LED Indicators

Key Features

- Supports 10/100/1000 Mbps auto-sensing capability
- Supports Auto MDIX (straight and cross network cable auto-detection)
- USB specification 1.0, 1.1 and 2.0 compliant
- Supports USB full and high speed modes with bus power capability
- IEEE 802.3, 802.3u, and 802.3ab (10Base-T, 100Base-TX, and 1000Base-T) compatible
- Supports both full-duplex and half-duplex operation in Fast Ethernet
- Supports suspend mode and remote wakeup via link-up and magic packet
- Supports Windows 2000/XP/Vista/7, Mac 10.4/10.5/10.6/10.7
- Supports Jumbo Frame up to 9K

Works Well With



WBR-6003
150Mbps Wireless Router



GNS-1001
1-Bay Gigabit Network Storage

Technical Specification

Network Standards

IEEE 802.3: 10Base-T

IEEE 802.3u: 100Base-T

IEEE 802.3ab: 1000Base-T

Data Transfer Rates

Ethernet: 10Mbps (Half/Full Duplex)

Fast Ethernet: 100Mbps (Half/Full Duplex)

Gigabit: 1000Mbps (Half/Full Duplex)

Data Bus

USB 2.0 (1.1 compliant)

LED Indicators

Link: Off when there's no network traffic and On for LAN activity. Blinking when connection to a network.

Power Consumption

950mW

Power Management

Suspend mode, hibernation mode

Network Interface

Female RJ-45 jack

RAM

Embedded 20KB SRAM for RX packet buffering and 20KB SRAM for TX packet buffering

Operating System Support

Windows® 2000, XP, Vista™, 7; Mac 10.4, 10.5, 10.6, 10.7

Dimension (L x W x H)

78 mm x 48 mm x 20 mm

Weight

60g

Working Environment:


Operation temperature: 10 ~ 40 degree

Storage temperature: -10 ~ 80 degree

Certification

FCC, CE

Product Diagram

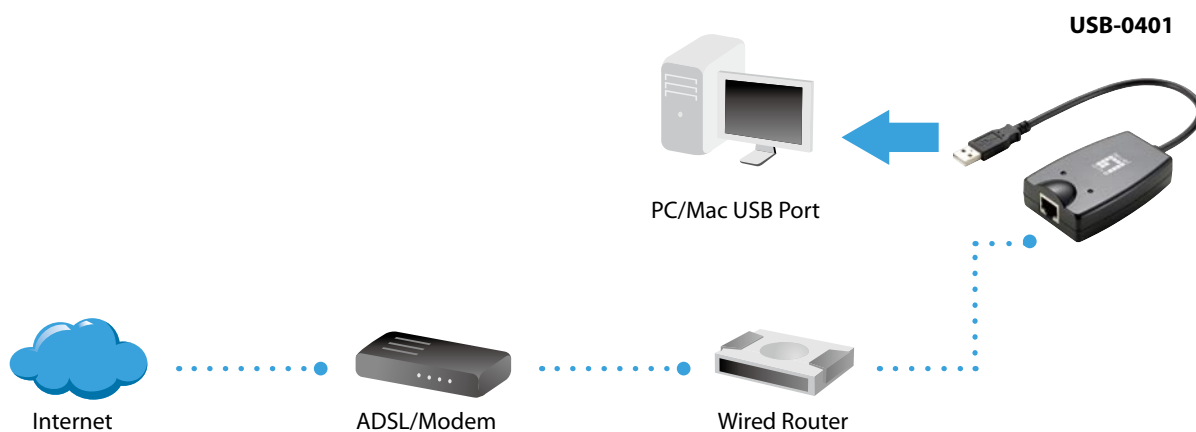

Order Information

Package Content

USB-0401: USB Gigabit Ethernet Adapter

USB-0401

Quick Installation Guide

CD Manual/Utility