

5-Megapixel Day/Night Wireless P/T Network Camera



WCS-6050

H/W Version: 1

The LevelOne WCS-6050 is a quality yet cost-effective surveillance solution for the home and office. It is designed for easy and flexible installation, provides a choice of either a 150Mbps wireless or wired connection and a WPS (Wi-Fi protected setup) button to secure the wireless connection with just the push of a button, and the motorized Pan and Tilt provides a viewing angle of $\pm 355^{\circ}$ pan and $\pm 135^{\circ}$ tilt. Equipped with a 5-Megapixel sensor and built-in IR cut filter/IR illuminator LEDs, the camera provides high resolution quality and sharp sensitivity – ideal for security applications both day and night.

The WCS-6050 is equipped with many advanced features such as Level1DNS[™] Service, DI/DO for external alarm and sensor, a SD/SDHC card slot and USB interface for local storage, built-in microphone and external speaker for 2-way audio communications. Moreover, users can also set up 16 motion detection regions with the camera, each with adjustable size and sensitivity. When motion is detected at the specified regions, the system can send an E-mail alert or send captured images via FTP upload to a designated storage server. The WCS-6050 is indisputably the top choice for reliable and high performance surveillance.

Remote Viewing Made Easy

Level1DNS[™] service, an intelligent dynamic DNS service which is handy at situation where IP address of your LevelOne device is not permanent, which is frequently changed by your ISP. By offering you an unique domain name, our Level1DNS[™] service ensures your device is always reachable from anywhere around the globe and easy remote access through web browsers.

64-channel Management Software

We aim to offer you the most versatile and comprehensive surveillance solutions. Our IP CamSecure software coming with the camera allows you to monitor up to 64 megapixel IP cameras simultaneously on one screen to enhance scalability. For added convenience and flexibility, the software includes various advanced features such as scheduling recording, event alert, and heaps more. In addition, simply install our free iCamSecure App to your smartphone and connect to the PC with IP CamSecure software installed, you will easily turn your iPhone/ Android smartphone into a portable surveillance system for real-time monitoring and snapshot.

Key Features

- 5-Megapixel (2560x1920) high-definition resolution
- Compatible with IEEE 802.11b/g/n wireless standards
- Built-in infrared LEDs for night viewing up to 10m
- Supports 355° pan and 135° tilt
- Compression: H.264/MJPEG
- Supports 2 video streams simultaneously
- Simple wireless connectivity and security with WPS push button
- Removable IR-cut filter for day and night surveillance
- Built-in microphone and external speaker for 2-way audio communication
- Digital input/output (1DI/1DO) for sensor and alarm
- Built-in SD/SDHC card slot for local storage
- Supports motion detection and event notification via e-mail or FTP
- Free 64-channel monitoring software included (supports iCamSecure App)

Works Well With



WBR-6003 150Mbps Wireless Router



GNS-1001 1-Bay Gigabit Network Storage


Technical Specification

Camera	Wireless
Image Sensor	Networking
5-Megapixel 1/3.2" Progressive Scan CMOS	Built-in 802.11b/g/n WLAN
Effective Pixels	Transfer Rate
2560x1920	802.11n: 6.5~72.2/13.5~150Mbps
Lens	
	802.11g: 54 ~ 6 Mbps
Board lens, fixed-focal, f=4.0 mm, F2.0	802.11b: 11 ~ 1 Mbps
Angle of View (H)	Wireless Security
62°	WEP, WPA-PSK, WPA2-PSK
Minimum Illumination	Channels
Color: 1.5 lux at F2.0	Ch.1 ~ 11 USA
B/W: 1.0 lux at F2.0	Ch.1 ~ 13 EU
IR Cut Filter	Operating Frequency
Removable infrared-cut filter for day & night function	2.412 ~ 2.472GHz
Shutter Time	Antenna
1 to 1/10000 sec.	2x 2dBi antennas
Pan/Tilt/Zoom	Alarm and Event Management
Pan range: ±355°(-177.5°~177.5°)	Motion Detection
Tilt range: ±135° (-45°~ 90°)	16 Detection Zones
Auto pan mode	Notification
Auto patrol mode	FTP, SMTP, Samba
IR LED	DI/DO
12 IR LEDs for illumination up to 10m	1 D/I and 1 D/O for external sensor and alarm
Video	General
Video Compression	Local storage
H.264 / MJPEG	SD/SDHC card slot, USB slot
Resolutions	Power
5M(2560x1920) / 1080p(1920x1080) / SXGA(1280x1024) /	DC12V 1.5A
WXGA(1280x800) / VGA(640x480) / QVGA(320x240) / QCIF(176x144)	Power Consumption (Max.)
Frame Rate	12W
Up to 15 fps at 2560x1920	Connectors
Up to 30 fps at 1920x1080	RJ-45 10BASE-T/100BASE-TX
Video Streaming	3.5mm line out
Multiple simultaneous streams, up to 2 streams	3.5mm mic/line in
Image Setting	WPS Button
- Adjustable image size, quality and bit rate	I/O terminal block (DI/DO)
- Configurable brightness, sharpness, contrast, saturation, white	DC Power Jack
balance and exposure	LED Indicator
- AGC/AWB/AES	Power/Link
- Flip & Mirror	Button
- Time Stamp	Reset Button
Video Format	Operating Temperature (°C)
AVI	0°C ~ 40°C
Audio	Operating Humidity (Non-condensing)
Audio Streaming	10% to 80%
2-way audio	Dimensions
Audio Compression	105 x 105 x 110 mm
G.726 / AMR	Weight
Audio Input/Output	356 g
Built-in microphone	Approvals
Mic/line input, line output	CE, FCC
Network	Viewing System Requirements
Networking	OS: Microsoft Windows 7/Vista/XP
10/100 Mbps Ethernet, RJ-45	Browser: Internet Explorer 6.x or above, Firefox, Chrome, Safari
Built-in 802.11b/g/n WLAN	Cell phone: 3GPP player
Security	Real Player: 10.5 or above
Multi-level user access with password protection	Quick Time 6.5 or above
IP address filtering	Bundled Software
Supported protocols	Bundled with 64-Channel LevelOne IP CamSecure surveillance
TCP/IP, HTTP, SMTP, FTP, DDNS, UPnP, Telnet, NTP, PPPoE, DNS, DHCP,	management software
RTSP, Samba	
Number of clients	
20	
DNS	
Easy Internet monitoring via configuration free Lovel1DNS™ service	

Network Camera

Easy Internet monitoring via configuration free Level1DNS[™] service

Front View and Rear View

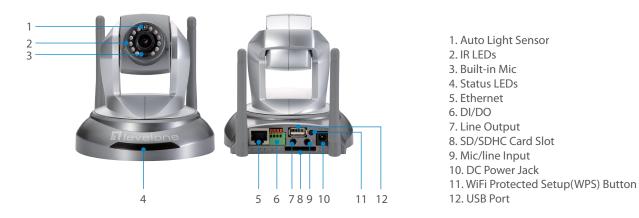

Product Diagram



Order Information Package Contents

WCS-6050: 5-Megapixel Day/Night Wireless P/T Network Camera WCS-6050, Antenna x 2, Power Adapter, Camera Stand, Quick Installation Guide, CD Manual / Utility

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.

© Copyright Digital Data Communications GmbH. All Rights Reserved.