



12-Slot Media Converter Chassis



H/W Version: 1

The 19-inch Media Converter Rack, CVH-3000 is designed to accommodate 12 units of Web Smart Series media converters at a central location for multiple segments cross connection. The Rack provides solutions for users to best manage media converters. Since converter is connected directly to the chassis main-board, no power cable or wire is required for connection. Moreover, a redundant power supply is offered in the power supply set to cope with any accidental breakdown of power supply.





Smart Converter Slots
Power Switch
AC power jack

Key Features

- 19inch Rack mount size
- Support 12units of various type Web Smart Media Converters
- 2 x Redundant Power Units supported

Works Well With



FVS-3800 10/100BASE-TX to 100BASE-X SFP Converter



GVS-3800 10/100/1000BASE-T to 1000BASE-X SFP Converter

Technical Specifications

Interface

Slot Capacity: 12 Slide-in units LED Indicators


Power Specification

Power: Redundant Power AC Power Input: 100~240VAC, 50~60Hz Power Consumption: 60W

Dimension Diagram

Hardware

Ambient Temperature: 0~50°C Storage Temperature: -10~70°C Humidity: 5~90% Dimensions (W*D*H): 440 x 258.6 x 89 mm Chassis Weight: 4.25kg Certification: FCC Part 15 Class A & CE Mark

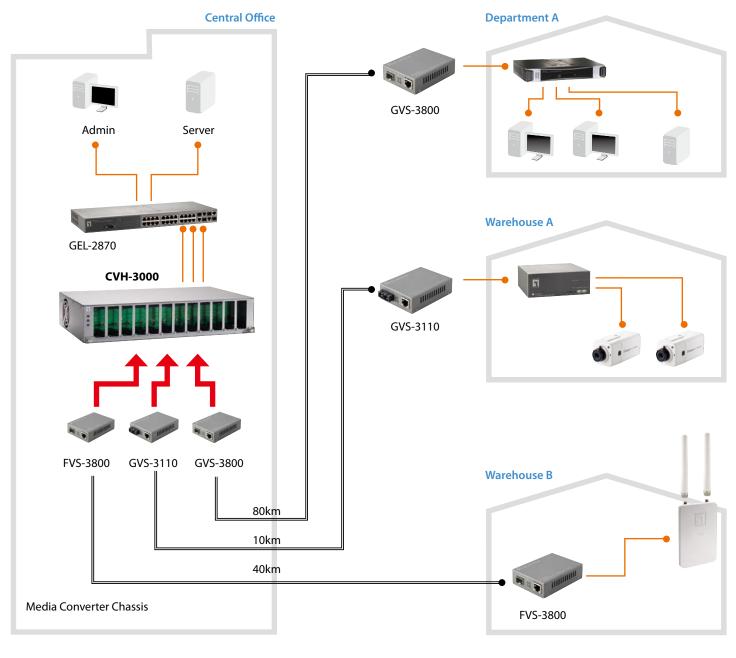



Order Information Package Contents

CVH-3000: 12-Slot Media Converter Chassis

Smart Converter Chassis with 2 x AC PSU

Power Cord

CD Manual

Optional Accessories



FVS-3800 10/100BASE-TX to 100BASE-X SFP Converter



FVS-3200 10/100BASE-TX to 100BASE-FX MMF SC Converter



FVS-3120 10/100BASE-TX to 100BASE-LX SMF SC Converter



GVS-3800 10/100/1000BASE-T to 1000BASE-X SFP Converter



GVS-3200 10/100/1000BASE-T to 1000BASE-SX MMF SC Converter



GVS-3110 10/100/1000BASE-T to 1000BASE-LX10 SMF SC Converter

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.