



# Audio Transmitter/ Receiver




ADE-8011

H/W Version: 1

## LevelOne Audio Extender

The LevelOne ADE-8011 is required when audio needs to be transmitted together with DVI signals to remote viewing stations. This Audio Transmitter/Receiver uses a standard 4-wire type phone cable to transmit and receive stereo audio from and up to 100m from the controlling station.

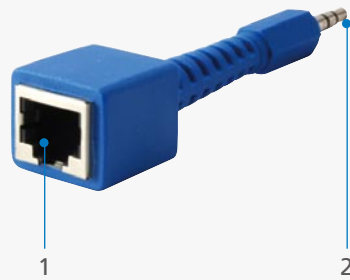

1. RJ-11 Input Port
2. 3.5mm Jack

## Key Features

- Stereo audio transmitter/receiver
- Transmits stereo audio via 4-wire phone cable
- Extends Audio signal up to 100 meters

## Works Well With



**ADE-8001**  
Short Range Receiver



**ADE-8002**  
Long Range Receiver



## Technical Specifications

### Function

Audio Transmitter/Receiver

### Audio Input

RJ-11 x 1, Audio Jack x 1

### Max Transmit Distance

Transmitting over 4-wire phone cable, stereo audio up to 100m

### Signal Type

Stereo

### Dimensions (mm)

18 x 19 x 20

### Operating Temp

0°C ~ 50°C




### Storage Temp

0°C ~ 50°C



### Humidity

70% ~ 25% Non-Condensing

## Product Diagram

-  Ethernet Cable (RJ 45)
-  Phone Line (RJ 11)
-  DVI Cable

### Displayer w/ DVI Connector

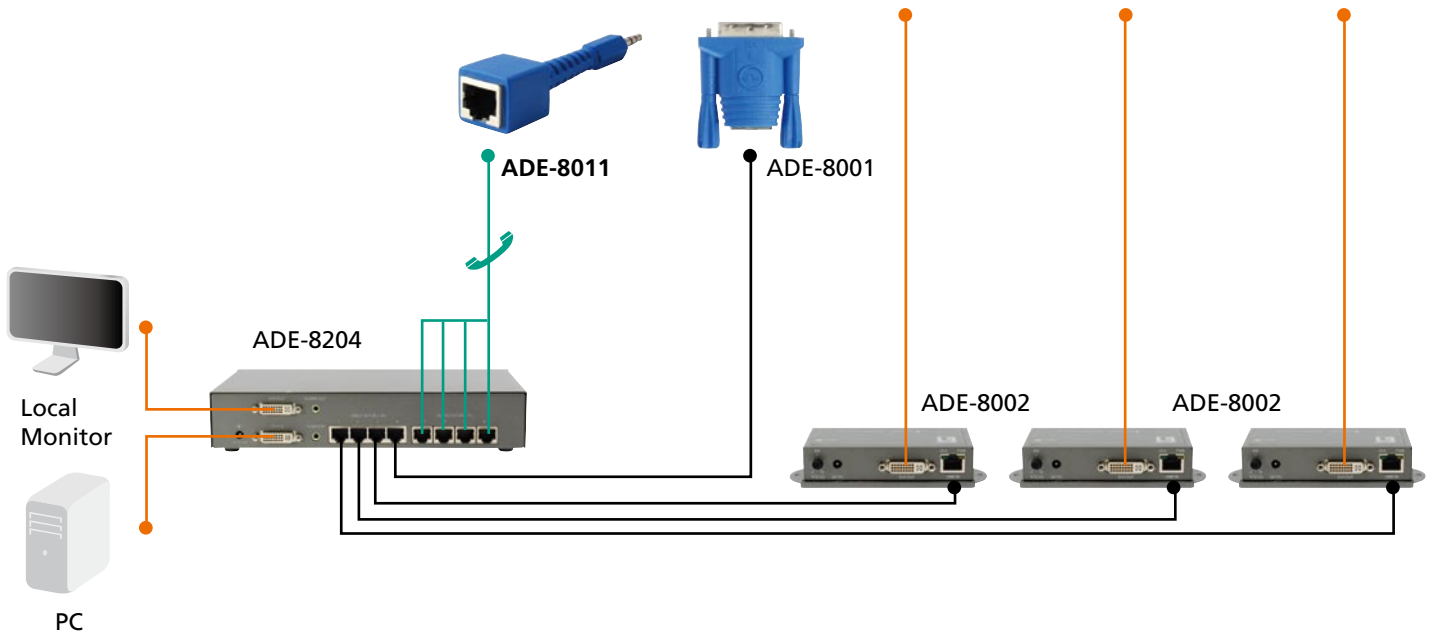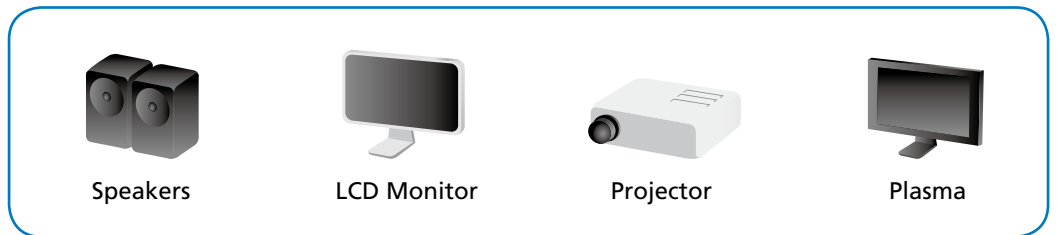

## Order Information

**ADE-8011:** Audio Transmitter/Receiver

## Package Contents

ADE-8011