



4-Port USB KVM Switch w/ Audio



KVM-0421

H/W Version: 1

Product Overview

The KVM-0421 4-Port USB KVM Switch with Audio from LevelOne offers users with an easy to install KVM switch that can manage four computers from a single monitor, keyboard and mouse. With audio support, users can connect a single set of speakers directly to the KVM switch and enjoy listening to music and watching movies from any computer.

Flexible Multimedia Feature


Users are now offered with flexible multimedia support. The KVM-0421 offers users with user-programmable simultaneous or independent PC and audio switching. This enables users to listen to music from one computer while simultaneously using the other computers for work or fun.

The KVM-0421 supports PC and Macintosh (MAC G3, G4, iMAC) platforms.

Easy to Switch between Computers

The KVM-0421 switches between computers either through the pushbuttons located on the switch or by using keyboard hot keys. The KVM switch includes a Windows® and Mac based utility allowing users to select and monitor active PCs from their desktop as well as to configure the keyboard hotkeys for easy switching between computers.

The KVM-0421 further supports hot-plugging for easy maintenance of computers without shutting down the KVM switch or the computer. The LED display offers

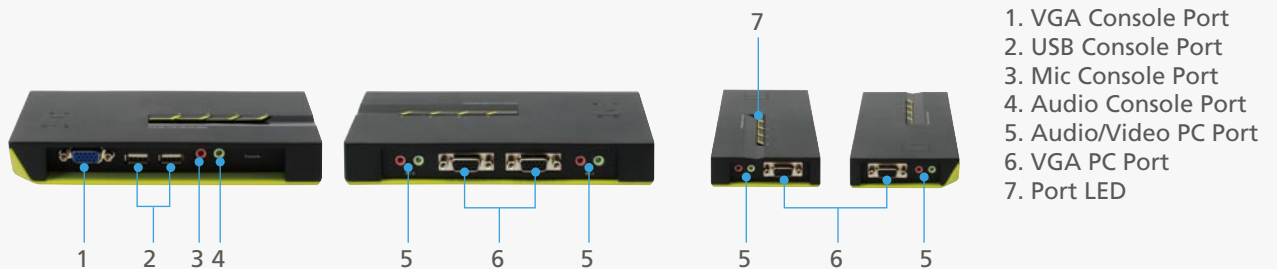

Key Features

- Flexible switching for an uninterrupted multimedia experience across multi-platforms
- Control and manage four computers using a single USB keyboard and mouse and monitor
- Simultaneous and independent PC and Audio user-programmable switching
- High 2048 x 1536 pixels VGA resolution
- USB interface power supply
- At-a-glance LED display for easy monitoring of PC activity
- True Plug-and-Play operation without any software installation or power supply
- Windows-based switching software utility included

Related Products



KVM-0221
2-Port USB KVM Switch w/ Audio



KVM-0222
2-Port USB KVM Switch



Technical Specification

Console Port:

Keyboard: USB x 1
 Mouse: USB x 1
 Video: HDB 15-pin (Female)
 Audio Input/ Output: 3.5mm jack x 1
 Mic Input/ Output: 3.5mm Mic jack x 1

PC Port:

USB x 4
 HDB 15-pin Female x 4
 Audio / Mic Connector x 8

Monitor Supported:

VGA / SVGA / QXGA / WUXGA

LEDs:

4 LEDs

PC Selection:

Push Button / Hot Key / Auto Switching

Power:

USB Interface Power

Microphone Supported:

V

Cables:

USB KVM Combo Cable Sets (1.8m) x 4
 Audio / Mic Cables x 2

Max. Resolution:

2048 x 1536


Scanning Interval:

10,15,20,25,30,35,40,45,50,55,60 Seconds

Operating Temp.:

0~50°C
 Storage Temp:
 -20~60°C
 Humidity:
 0~80 % RH Non-Condensing
 Enclosure:
 High-impact Plastic
 Weight (g):
 116
 Dimensions (L x W x H):
 164mm x 72mm x 26mm
 OS Supported:
 Win & Mac

Product Diagram

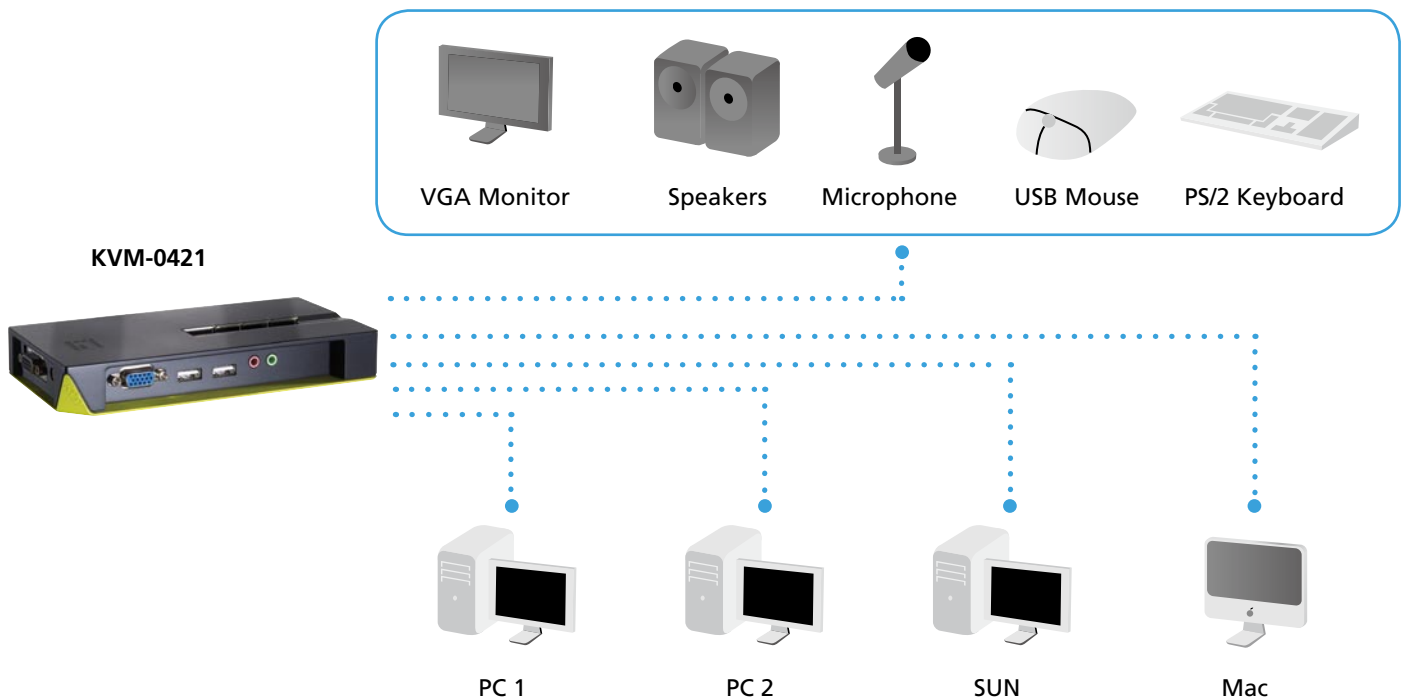

Order Information

KVM-0421: 4-Port USB KVM Switch with Audio

Package Content

KVM-0421
 KVM cable sets
 CD Manual
 Quick Installation Guide