

DVI Broadcasters with Audio



ADE-8204

H/W Version: 1


LevelOne DVI-Broadcaster Series

The ADE-8200 DVI Broadcaster series from LevelOne is a cost-effective alternative to expensive systems currently available. Without loosing resolution or sound quality, the LevelOne broadcaster series can broadcast DVI video signals over Cat5/5e/6 and stereo audio over 4-wire phone cabling to remote monitors at standard 1024x768 resolution 70 meters away.

Further, the broadcaster series has stackable capability to expand transmission of DVI signals

to additional viewing stations. By utilizing the multi port broadcasters (ADE-8202, 8204 and 8208), users can scale out the original DVI signal with audio to 81 remote monitor locations.

The single port transmitter (ADE-8201), coupled with the ADE-8002 long range DVI receiver, is able to transmit a DVI signal to a remote viewing station 70 meters away. Coupled with the short range receiver (ADE-8001) the single port transmitter transmits the DVI signal to a remote viewing station 15 meters away.

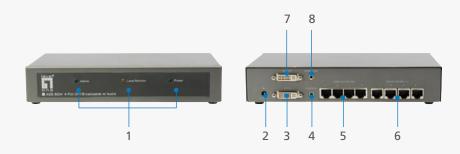

- 1. LED Indicators
- 2. Power Jack
- 3. DVI PC Port
- 4. Audio PC Port
- 5. RJ-45 to Receive Port (ADE-8002)
- 6. RJ-11 to Receive Port (ADE-8011)
- 7. DVI Console Port
- 8. Audio Console Port

Key Features

- Transmits DVI signal via Cat.5/Cat.5e/Cat.6
- Transmits stereo audio via 4-wire phone cable
- DVI signal transmission distance up to 70 meters at 1024 x 768 resolution
- Supports high DVI resolution up to 1920 x 1200
- Easy installation and no software required

Works Well With



ADE-8011Cat.5 Audio Transmitter/
Receiver




ADE-8001 Short-Range DVI Receiver

Technical Specifications

	DVI Transmitter			
Model No.	ADE-8201	ADE-8202	ADE-8204	ADE-8208
Product Name	1 Port DVI	2 Port DVI	4 Port DVI	8Port DVI
	Transmitter	Broadcaster with	Broadcaster with	Broadcaster with
		Audio	Audio	Audio
RJ-45 AV Input	-	-	-	
RJ-45 AV Output	1	2	4	8
DVI Input	1	1	1	1
DVI Output	-	1	1	1
Audio (RJ-11)Input	-	-	-	-
Audio(RJ-11)Output	-	2	4	8
Max Distance & Resolution			-	
Cascadable	-			
Signal Type	DVI-D			
Audio	Stereo			
Power Consumption	DC 5V, 250 mA	DC 5V,800 mA	DC 5V,3200 mA	DC 5V,3200 mA
Dimensions(mm)	58 x 40 x 17	194 x 87 x 24	240 x 130 x 44	240 x 130 x 44
Operating Temp.	0° C ~50° C	0° C ~60° C	0° C ~60° C	0° C ~60° C
Storage Temp.	0° C ~50° C	0° C ~60° C	0° C ~60° C	0° C ~60° C
Humidity	70% ~ 25%Non-Condensing			

Product Diagram

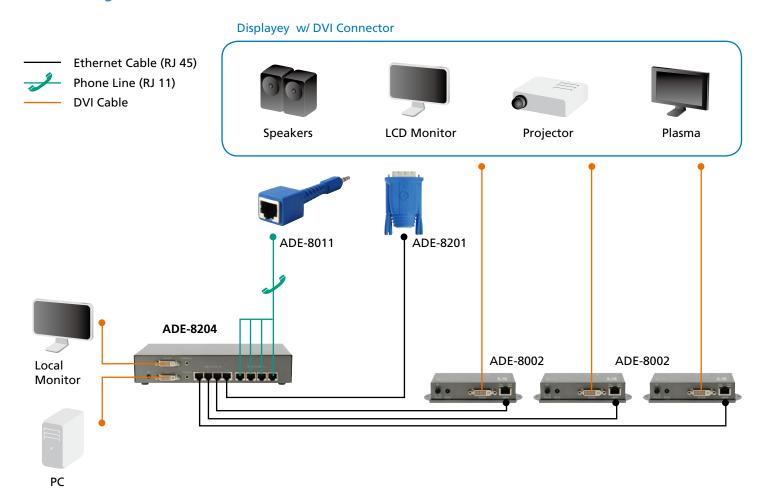

Order Information

Package Contents

ADE-8204: 4-Port DVI Broadcaster with Audio

ADE-8204

Power Adapter User Manual