



IEC-1100

10/100 Industrial Media Converter, SC MM 2KM

-10 to 60C

Overview

LevelOne IEC-1100 is an industrial Fast Ethernet media converter with IP30 ingress protection case. This converter is designed to be mounted on an industrial standard DIN-rail, plus the clearly visible status LEDs provide simple monitoring of port link activity.

Safety

Complies with IEC61000-6-2 EMC Generic standard immunity for Industrial environment; it also complies with IEC60068 vibration and shock resistance as well.

Cost Effective

This device operates under -10 to 60 Celsius (-14 to 140 Fahrenheit) temperature that offers optimal suitability for industrial applications at low cost while maintaining all components built to withstand harsh environment applications without compromise reliability and stability.

Plug & Play


This Industrial Media Converter is designed for the demanding industrial environments at businesses in need of instant connectivity with no setup or configure required, truly plug and play.

Features

- Provides 1-port 10/100Base-TX plus 1-port 100Base-FX
- 100Base-FX Multi-mode fiber for the link up to 2 kilometers
- -10°C to 60°C (14°F to 140°F) and is tested for functional operation @ -20°C to 70°C (-4°F to 158°F)
- 10/100Mbps Full/Half duplex, Auto-negotiation, Auto-MDI/MDIX
- Supports 12 to 48VDC power input
- Complies with IEC61000-6-2 EMC Generic standard immunity for industrial environment
- 484K bits buffer memory
- ;B% B'Seff[U]S&W
- Supports DIN-rail mounting installation

Diagrams

Unit: mm

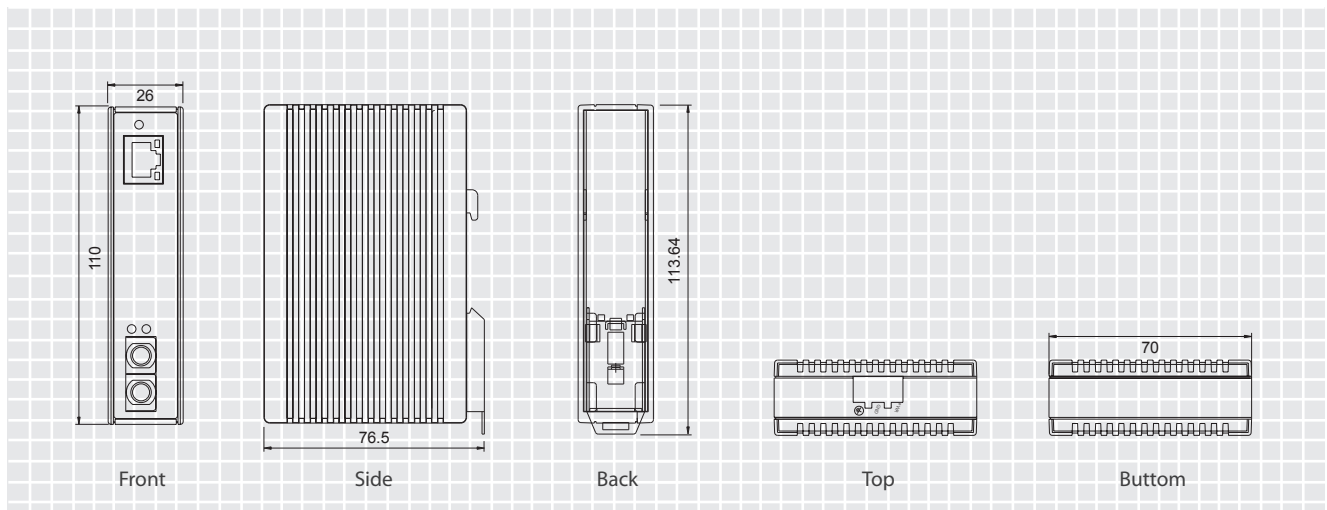

Specifications

| Technology | |
|----------------------------|--|
| Standards | <ul style="list-style-type: none"> IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX/100BASE-FX, IEEE802.3x |
| Forward and Filtering Rate | <ul style="list-style-type: none"> 14,880pps for 10Mbps 148,810pps for 100Mbps |
| Packet Buffer Memory | <ul style="list-style-type: none"> 484K bits |
| Processing Type | <ul style="list-style-type: none"> Store-and-Forward Half-duplex back-pressure and IEEE802.3x full-duplex flow control |

| Power | |
|-----------------------------|--|
| Input | <ul style="list-style-type: none"> Input Voltage: 12 to 48VDC (Terminal Block) |
| Power Consumption | <ul style="list-style-type: none"> 4.3W Max. 0.3A @ 12VDC, 0.15A @ 24VDC, 0.07A @ 48VDC |
| Reverse Polarity Protection | <ul style="list-style-type: none"> Present |

| Mechanical | |
|--------------|---|
| Casing | <ul style="list-style-type: none"> Plastic case IP30 |
| Dimensions | <ul style="list-style-type: none"> 26mm (W) x 70mm (D) x 110mm (H) (1.02" (W) x 2.76" (D) x 4.33" (H)) |
| Weight | <ul style="list-style-type: none"> 0.2Kg (0.44lb.) |
| Installation | <ul style="list-style-type: none"> DIN-Rail (Top hat type 35mm) Mounting |

| Interface | |
|----------------|---|
| Ethernet Port | <ul style="list-style-type: none"> 10/100BASE-TX: 1 port 100BASE-FX: 1 port |
| LED Indicators | <ul style="list-style-type: none"> Per Unit: Power Status (Power1, Power2) Per Port: 10/100TX, 100FX: Link/Activity (Green), Speed (Yellow) |

| Environment | |
|---------------------------|---|
| Operating Temperature | <ul style="list-style-type: none"> -10°C to 60°C (14°F to 140°F) Test @ -20°C to 70°C (-4°F to 158°F) |
| Storage Temperature | <ul style="list-style-type: none"> -25°C to 85°C (-13°F to 185°F) |
| Ambient Relative Humidity | <ul style="list-style-type: none"> 5% to 95% (non-condensing) |
| MTBF | <ul style="list-style-type: none"> 136.83 years |

| Regulatory Approvals | |
|-------------------------------|--|
| ISO | <ul style="list-style-type: none"> Manufactured in an ISO9001 facility |
| Safety | <ul style="list-style-type: none"> UL60950-1, EN60950-1, IEC60950-1 |
| EMI | <ul style="list-style-type: none"> FCC Part 15, Class A, VCCI EN61000-6-4 <ul style="list-style-type: none"> EN55022 EN61000-3-2 EN61000-3-3 |
| EMS | <ul style="list-style-type: none"> EN61000-6-2 <ul style="list-style-type: none"> EN61000-4-2 (ESD Standards) Contact: + / - 6KV Air: + / - 8KV EN61000-4-3 (Radiated RFI Standards) 10V/m, 80 to 1000MHz; 80% AM 3V/m, 1400 to 2000MHz; 80% AM 1V/m, 2000 to 3000MHz; 80% AM EN61000-4-4 (Burst Standards) Signal Ports: + / - 4.4KV D.C. Power Ports: + / - 4.4KV EN61000-4-5 (Surge Standards) Signal Ports: + / - 1KV; Line-to-Line D.C. Power Ports: + / - 0.5KV; Line-to-earth EN61000-4-6 (Induced RFI Standards) Signal Ports: 10Vrms @ 0.15 - 80MHz; 80% AM D.C. Power Ports: 10Vrms @ 0.15 - 80MHz; 80% AM EN61000-4-8 (Magnetic Field Standards) 30A/m @ 50, 60Hz |
| Environmental Test Compliance | <ul style="list-style-type: none"> IEC60068-2-6 Fc (Vibration Resistance) 5g @ 10 - 150Hz, Amplitude 0.35mm (Operation/Storage/Transport) IEC60068-2-27 Ea (Shock) 25g @ 11ms (Half-Sine Shock Pulse; Operation) 50g @ 11ms (Half-Sine Shock Pulse; Storage/Transport) FED STD 101C Method 5007.1 (Free fall w/ package) -Tested with Cross Weight and Drop High standard table |

Order Information

IEC-1100 - 10/100 Industrial Media Converter, SC MM 2KM -10 to 60C

Package Contents

IEC-1100

Quick Installation Guide