



IES-1083

8 x 802.3af + 2 GE SFP Managed Switch -40 to 75C, DIN-rail

Overview

LevelOne IES-1083 Industry Ethernet Switch provides 8 PoE ports of 10/100Base-TX plus 2 1000Base SFP slots to enable high speed network at mission-critical environment. This device is designed to be mounted on an industry standard DIN-rail, plus the clearly visible status LEDs provide simple monitoring of port link activity. Moreover, the SFP slots support pluggable modules that enabling you to choose from a variety of transceivers.

High Reliability

All components are built to withstand harsh environment applications without compromise where humidity, temperature variation and even shock vibration are concerns, including Electric & Utility, Critical Infrastructure, Transportation and Surveillance Security. This device operates under -40 to 75 Celsius (-40 to 167 Fahrenheit) temperature.

Power over Ethernet

This switch is Power Sourcing Equipment (PSE), and it is fully complied with IEEE 802.3af PoE standard at maximum 15.4W power budget per port. It helps to save infrastructure wiring costs dramatically by eliminating electric wiring and less UPS needed.

Features

- Supports PoE Power Sourcing Equipment (PSE)
- PoE control and scheduling
- Supports a-ring and RSTP/MSTP/STP for Ethernet redundancy
- IP Multicast Filtering through IGMP Snooping V1, V2 & V3
- Supports port-based VLAN and IEEE802.1Q VLAN Tagging and GVRP
- IEEE802.1p QoS with four priority queues
- MAC-based trunking with automatic link fail-over
- RS-232 console, Telnet, SNMP V1, V2c & V3, RMON, Web Browser, and TFTP Management
- Supports Command Line Interface in RS-232 Console
- Supports IEEE 802.3ad Link Aggregation

Resilient Ring Network

Supports Ring topology network providing simple installation and ultra fast network recovery performance, less than 15ms. Unlike much complex resilient topology, such as a redundant star, the Ring simplifies the network design and requires less cabling installation. In addition, fast network recovery time helps minimize system downtime.

Management


IES-1083 supports a variety of management features including: CLI via Console or Telnet; Graphic User Interface via Web Browser or Simple Network Management Protocol via SNMP tools. It provides better visibility and management of those critical assets.

Safety

This device has been tested under UL508 standard for Industrial Control Equipment to endurance under test turn on and off 6,000 times while loaded, with no single failure. It's highly reliability and safety measurement to ensure field hardened, especially for the harsh environment.

Diagrams

Unit: mm

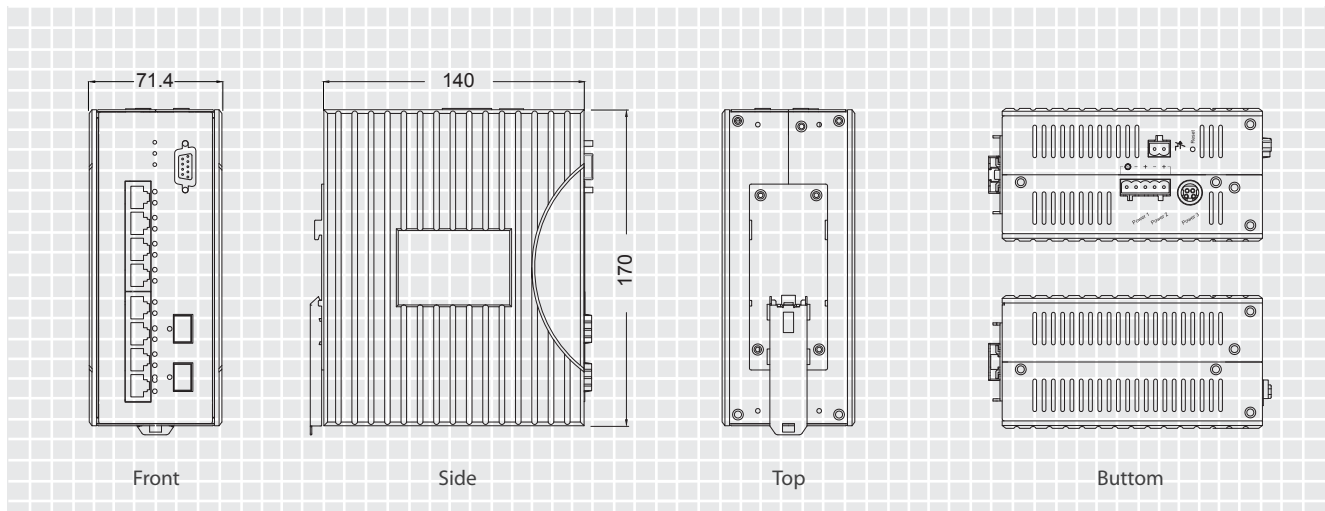

Specifications

| Technology | |
|----------------------------|--|
| Standards | <ul style="list-style-type: none"> IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX/100BASE-FX, IEEE802.3ab 1000BASE-T, IEEE802.3z 1000BASE-SX/1000BASE-LX, IEEE802.3x, IEEE802.1p, IEEE802.1Q, IEEE802.1w, IEEE802.1x, IEEE802.3ad, IEEE802.1D, IEEE802.3af |
| Forward and Filtering Rate | <ul style="list-style-type: none"> 14,880pps for 10Mbps 148,810pps for 100Mbps 1,488,100pps for 1000Mbps |
| Packet Buffer Memory | <ul style="list-style-type: none"> 2M bits |
| Processing Type | <ul style="list-style-type: none"> Store-and-Forward Half-duplex back-pressure and IEEE802.3x full-duplex flow control |
| Address Table Size | <ul style="list-style-type: none"> 8192 MAC addresses |

| Power | |
|--|--|
| Power Input | <ul style="list-style-type: none"> Redundant power inputs: <ul style="list-style-type: none"> Terminal Block: 47 - 57VDC DC Jack: 47 - 57VDC |
| Power Consumption | <ul style="list-style-type: none"> Device: Max. 15W (without PoE) PoE power budget (depends on power input): 181.6W Max. |
| PoE Power Output | <ul style="list-style-type: none"> Port 1 to 8 IEEE802.3af: up to 15.4W/port, 47 - 57VDC. |
| <ul style="list-style-type: none"> Supports overload current protection Supports reverse polarity protection | |

| Mechanical | |
|--------------|---|
| Casing | <ul style="list-style-type: none"> Metal case IP30 |
| Dimensions | <ul style="list-style-type: none"> 65mm (W) x 145mm (D) x 165mm (H) (2.56" (W) x 5.71" (D) x 6.5" (H)) |
| Weight | <ul style="list-style-type: none"> 1Kg (2.2lbs.) |
| Installation | <ul style="list-style-type: none"> Din-Rail (Top hat type35mm), Wall Mount |

| Interface | |
|----------------|--|
| Ethernet Port | <ul style="list-style-type: none"> 10/100BASE-TX (PoE): 8 or 4 ports 100BASE-FX: 0, 2 or 4 ports Gigabit: 0, 1 or 2 ports |
| Console Port | <ul style="list-style-type: none"> Port: One DB9 RS-232 port |
| LED Indicators | <ul style="list-style-type: none"> Per Unit: Power Status (Power 1, Power 2, Power 3) Per Port: PoE (Amber) for 10/100TX, 10/100TX, 100FX: Link/Activity (Green), Gigabit: Link/Activity (Green) |

| Environment | |
|---------------------------|---|
| Operating Temperature | <ul style="list-style-type: none"> -40°C to 75°C (-40°F to 167°F) Tested @ -40°C to 85°C (-40°F to 185°F) |
| Storage Temperature | <ul style="list-style-type: none"> -40°C to 85°C (-40°F to 185°F) |
| Ambient Relative Humidity | <ul style="list-style-type: none"> 5% to 95% (non-condensing) |
| MTBF | <ul style="list-style-type: none"> 31.69 years |

| Regulatory Approvals | |
|-------------------------------|---|
| ISO | <ul style="list-style-type: none"> Manufactured in an ISO9001 facility |
| Safety | <ul style="list-style-type: none"> UL508 |
| EMI | <ul style="list-style-type: none"> FCC Part 15, Class A EN61000-6-4 <ul style="list-style-type: none"> EN55022 EN61000-3-2 EN61000-3-3 |
| EMS | <ul style="list-style-type: none"> EN61000-6-2 <ul style="list-style-type: none"> EN61000-4-2 (ESD Standards) <ul style="list-style-type: none"> Contact: +/- 6KV; Criteria B Air: +/- 8KV; Criteria B EN61000-4-3 (Radiated RFI Standards) <ul style="list-style-type: none"> 10V/m, 80 to 1000MHz; 80% AM Criteria A EN61000-4-4 (Burst Standards) <ul style="list-style-type: none"> Signal Ports: +/- 4KV; Criteria B D.C. Power Ports: +/- 4KV; Criteria B EN61000-4-5 (Surge Standards) <ul style="list-style-type: none"> Signal Ports: +/- 1KV; Line-to-Line; Criteria B D.C. Power Ports: +/- 0.5KV; Line-to-Earth; Criteria B EN61000-4-6 (Induced RFI Standards) <ul style="list-style-type: none"> Signal Ports: 10Vrms @ 0.15 - 80MHz; 80% AM Criteria A D.C. Power Ports: 10Vrms @ 0.15 - 80MHz; 80% AM Criteria A EN61000-4-8 (Magnetic Field Standards) <ul style="list-style-type: none"> 30A/m @ 50, 60Hz; Criteria A |
| Environmental Test Compliance | <ul style="list-style-type: none"> IEC60068-2-6 Fc (Vibration Resistance) <ul style="list-style-type: none"> 5g @ 10 - 150Hz, Amplitude 0.35mm (Operation/Storage/Transport) IEC60068-2-27 Ea (Shock) <ul style="list-style-type: none"> 25g @ 11ms (Half-Sine Shock Pulse; Operation) 50g @ 11ms (Half-Sine Shock Pulse; Storage/Transport) IEC60068-2-32 Ed (Free Fall) <ul style="list-style-type: none"> 1M (3.281ft.) |

Order Information

IES-1083 - 8 x 802.3af + 2 GE SFP Managed Switch -40 to 75C, DIN-rail

Package Contents

IES-1083

CD Manual

Quick Installation Guide

Optional Accessories

SFP-4200 - 1.25G MMF SFP Transceiver (550m, 850nm, -20 to 85C)
 SFP-4210 - 1.25G SMF SFP Transceiver (10km, 1310nm, -40 to 85C)
 SFP-4240 - 1.25G SMF SFP Transceiver (40km, 1310nm, -40 to 85C)
 SFP-4270 - 1.25G SMF SFP Transceiver (70km, 1550nm, -40 to 85C)
 SFP-4310 - 1.25G BIDI SMF SFP Transceiver (10km, 1310nm, -40 to 85C)
 SFP-4320 - 1.25G BIDI SMF SFP Transceiver (10km, 1550nm, -40 to 85C)

SFP-4330 - 1.25G BIDI SMF SFP Transceiver (20km, 1310nm, -40 to 85C)
 SFP-4340 - 1.25G BIDI SMF SFP Transceiver (20km, 1550nm, -40 to 85C)
 SFP-4350 - 1.25G BIDI SMF SFP Transceiver (40km, 1310nm, -40 to 85C)
 SFP-4360 - 1.25G BIDI SMF SFP Transceiver (40km, 1550nm, -40 to 85C)
 SFP-4370 - 1.25G BIDI SMF SFP Transceiver (60km, 1310nm, -40 to 85C)
 SFP-4380 - 1.25G BIDI SMF SFP Transceiver (60km, 1550nm, -40 to 85C)