

150Mbps Wireless USB Adapter



H/W Version: 1

Product Overview

The LevelOne WUA-0606 150Mbps USB Adapter complies with the most advanced IEEE802.11n standards, and is also compatible with IEEE802.11 n/b/g wireless devices. It is a Mini, delicate 11N Wireless USB network adapter with transmission rate up to 150Mbps and is easy to carry along.

Wireless Stream and File Sharing

The WUA-0606 offers users a simple way to connect to their local network for quickly accessing and sharing the Internet, transfer files, videos, music or photos

Simple and Advanced Security

With Wi-Fi Protected Setup (WPS), applying advanced encryption to the wireless signal can be done with a push of a button. For work or entertainment, the WUA-0606 is a reliable and secure solution for any notebook or desktop computer that needs wireless connectivity. It has low power consumption, good signal, long transmission range, and is regarded as a high-performance, cost-effective 11N wireless USB Adapter.





USB Connector
LED Indicators
WiFi Protected Setup (WPS) Button

Key Features

- High Speed Wireless Connection, Speeds Up to 150 Mbps
- Complies with IEEE 802.11n, and is compatible with IEEE 802.11g, IEEE 802.11b standards
- Supplies USB2.0 interface
- Supports 20MHz/40MHz frequency width
- Detects network and changes transmission rate automatically
- Provides two working modes: Infrastructure and Ad-Hoc
- Compatible with Windows 7, Vista, Windows XP, Windows 2000
- Supports WMM to better smooth your audio and video
- Supports 64 / 128-bit WEP ,WPA and WPA2 encryption for high level security
- Support Wi-Fi Protected Setup (WPS) Configuration
- Quick and Easy Installation
- Portable and Mini-Sized Design

Works Well With



WGR-6012 300Mbps Wireless Gigabit Router




WBR-6011 300Mbps *N_Max* Wireless Router

Technical Specification

Standard Compliance	Network Security
IEEE 802.11n, IEEE 802.11g, IEEE 802.11b	WPA
Host Interface	WPA2
USB Port Type: USB 2.0, 1.1	WEP-64/128 bit
Radio Operation	TKIP/AES
Data Transfer Rate	802.1x RADIUS
802.11n: Up to 150Mbps (40Mhz)	Supports WPS Configuration
802.11n: Up to 75Mbps (20Mhz)	Device Management
802.11g: 54, 48, 36, 24, 18, 12, 9 and 6 Mbps	Windows Utility Software
802.11b: 11, 5.5, 2 and 1 Mbps	OS Supported: Windows 2000 / XP / Vista / 7
Modulation	Physical Specification
802.11n: BPSK, QPSK, 16-QAM, 64-QAM	LED Indicator
802.11g: OFDM	Link
802.11b: CCK, QPSK, BPSK	Dimension (L x W x H)
Media Access Control	39 x 20 x 8mm
CSMA/CA with ACK	Temperature
Frequency Band	Operating: 0~50 Degree C
2.4GHz ~ 2.4835GHz	Storage: -40~70 Degree C
Number of Channels	Humidity
Channel 1 ~ 11 North America (FCC)	Operating: 10~90% (Non-condensing)
Channel 1 ~ 13 Europe (ETSI)	Certifications
Transmitter Output Power (Typical)	FCC, CE
802.11n: 13.5± 1dBm	
802.11g: 13.5 ± 1dBm	
802.11b: 17 ± 1dBm	
Antenna Type	
1 x 2dbi Built-In Antenna	

Product Diagram

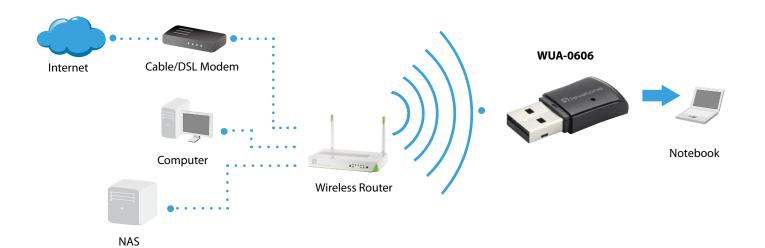

Order Information Package Contents

WUA-0606: 150Mbps Wireless USB Adapter

WUA-0606 Quick Installation Guide CD Manual / Driver / Utility

Optional Accessories



SUS-1000 Small USB Stand



SUS-1003 Small USB Stand with extension cable

All mentioned brand names are registered trademarks and property of their owners. Technical specifications are subject to change without notice.

 $\ensuremath{\mathbb{C}}$ Copyright Digital Data Communications GmbH. All Rights Reserved.